

Quick Disconnects

Piggy Back Disconnects

• Materials:

Conductor: Brass
Sleeve: Copper tubular
Insulation: Vinyl
Plating: Tin

• Operating Temperature:

-10°C to +75°C.

• Features:

Max. voltage rating: 300V.
Flared barrel for easy wire insertion.
Low insertion force and easy crimping whilst ensuring secure termination.
(L suffix on Item No. denotes long internal copper sleeve).

NOTE: See table below to determine the products holding a UL Certificate.



Max. current rating

Red	10A
Blue	15A
Yellow	24A

	Item No.	Colour	Wire Range (mm ²)	Dimensions (mm)								
				Tab Size	B	C	D	W	W1	L	F	F1
UL	RPB63	Red	0.5-1.5	0.8 x 6.35	10.0	1.7	3.8	6.7	6.35	21.0	8.0	8.2
	RPB63L	Red	0.5-1.5	0.8 x 6.35	10.0	1.7	3.8	6.7	6.35	21.0	8.0	8.2
	BPB63	Blue	1.5-2.5	0.8 x 6.35	10.0	2.3	4.7	6.7	6.4	21.0	8.0	8.2
UL	BPB63L	Blue	1.5-2.5	0.8 x 6.35	10.0	2.3	4.7	6.7	6.4	21.0	8.0	8.2
	YPB63	Yellow	4.0-6.0	0.8 x 6.35	13.0	3.4	6.2	6.7	6.4	24.5	8.0	8.2
	YPB63L	Yellow	4.0-6.0	0.8 x 6.35	13.0	3.4	6.2	6.7	6.4	24.5	8.0	8.2

See technical drawings on next page


Quick Disconnects

Piggy Back Disconnects

Standard Internal Copper Sleeve

Material

- ① Brass
- ② Tin
- ③ Vinyl
- ④ Copper

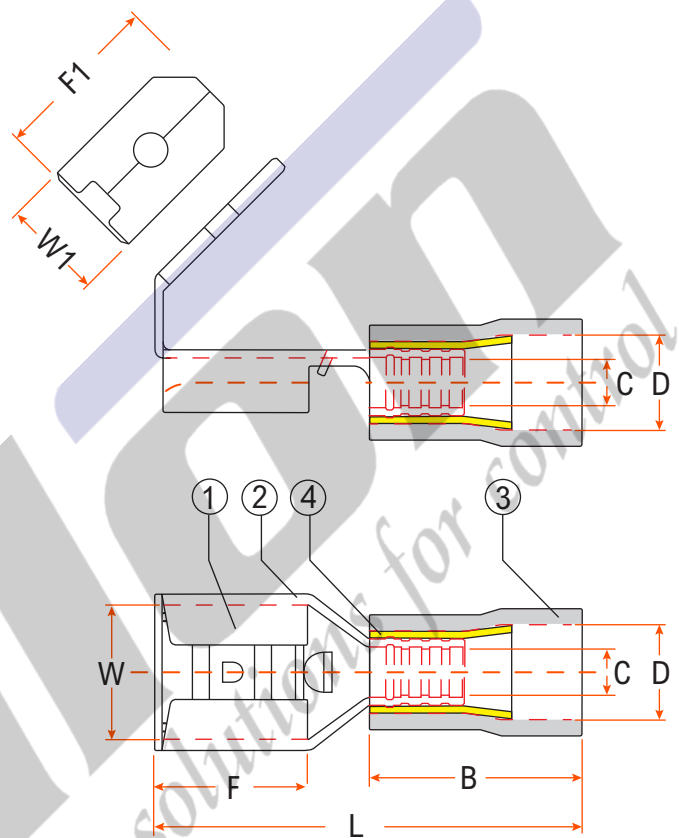

Long Internal Copper Sleeve

*L suffix on Item No.
denotes Long Internal
Copper Sleeve

