

Quick Disconnects

Female Spade Disconnects

• Materials:

Conductor: Brass
Sleeve: Copper tubular
Insulation: Vinyl
Plating: Tin

• Operating Temperature:

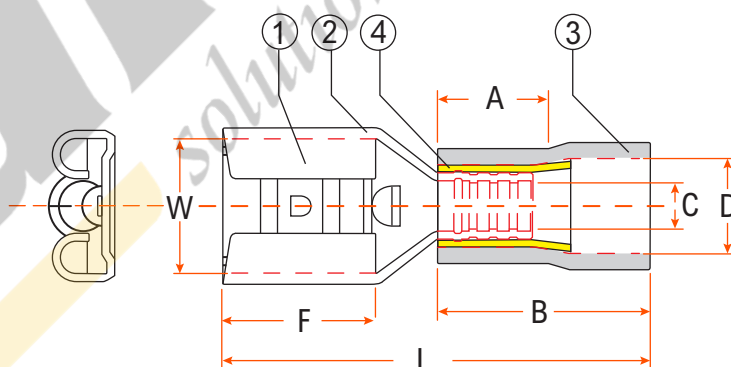
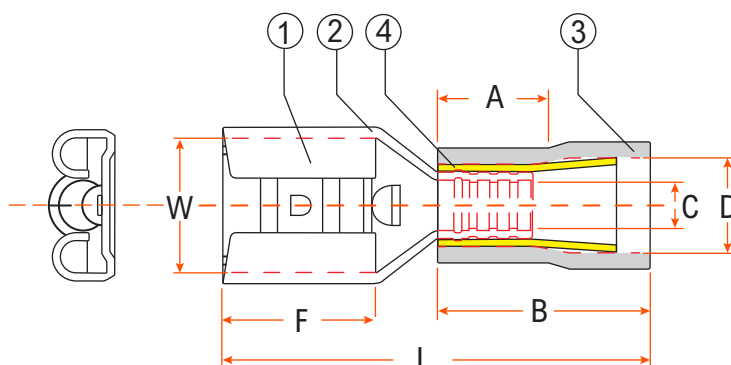
-10°C to +75°C.

• Features:

Max. voltage rating: 300V.
Flared barrel for easy wire insertion.
Low insertion force and easy crimping whilst ensuring secure termination.


Material

- ① Brass
- ② Tin
- ③ Vinyl
- ④ Copper

Standard Internal Copper Sleeve

Long Internal Copper Sleeve

Max. current rating

Red	10A
Blue	15A
Yellow	24A

See product technical table
on next page

Quick Disconnects

Female Spade Disconnects

Item No.	Colour	Wire Range (mm ²)	Dimensions (mm)							
			Tab Size	A	B	C	D	W	L	F
RFS28-5	Red	0.5-1.5	0.5 x 2.80	5.2	10.5	1.7	3.8	3.2	18.8	6.4
RFS28-5L	Red	0.5-1.5	0.5 x 2.80	5.2	10.5	1.7	3.8	3.2	18.8	6.4
RFS28-8	Red	0.5-1.5	0.8 x 2.80	5.2	10.5	1.7	3.8	3.2	18.8	6.4
RFS28-8L	Red	0.5-1.5	0.8 x 2.80	5.2	10.5	1.7	3.8	3.2	18.8	6.4
RFS48-5	Red	0.5-1.5	0.5 x 4.75	5.2	10.5	1.7	3.8	5.0	19.0	6.4
RFS48-5L	Red	0.5-1.5	0.5 x 4.75	5.2	10.5	1.7	3.8	5.0	19.0	6.4
RFS48-8	Red	0.5-1.5	0.8 x 4.75	5.2	10.5	1.7	3.8	5.0	19.0	6.4
RFS48-8L	Red	0.5-1.5	0.8 x 4.75	5.2	10.5	1.7	3.8	5.0	19.0	6.4
RFS63	Red	0.5-1.5	0.8 x 6.35	5.2	10.5	1.7	3.8	6.6	20.8	7.2
RFS63L	Red	0.5-1.5	0.8 x 6.35	5.2	10.5	1.7	3.8	6.6	20.8	7.2
BFS48-5	Blue	1.5-2.5	0.5 x 4.75	5.2	10.5	2.3	4.7	5.0	19.0	6.4
BFS48-5L	Blue	1.5-2.5	0.5 x 4.75	5.2	10.5	2.3	4.7	5.0	19.0	6.4
BFS48-8	Blue	1.5-2.5	0.8 x 4.75	5.2	10.5	2.3	4.7	5.0	19.0	6.4
BFS48-8L	Blue	1.5-2.5	0.8 x 4.75	5.2	10.5	2.3	4.7	5.0	19.0	6.4
BFS63	Blue	1.5-2.5	0.8 x 6.35	5.2	10.5	2.3	4.7	6.6	20.8	7.2
BFS63L	Blue	1.5-2.5	0.8 x 6.35	5.2	10.5	2.3	4.7	6.6	20.8	7.2
BFS83	Blue	1.5-2.5	0.8 x 8.00	5.2	10.5	2.3	4.7	8.2	24.5	10.2
YFS63	Yellow	4.0-6.0	0.8 x 6.35	5.7	13.0	3.4	6.2	6.6	23.8	7.2
YFS63L	Yellow	4.0-6.0	0.8 x 6.35	5.7	13.0	3.4	6.2	6.6	23.8	7.2
YFS95	Yellow	4.0-6.0	1.2 x 9.40	5.7	13.0	3.4	6.2	10.0	30.0	12.0
YFS95L	Yellow	4.0-6.0	1.2 x 9.40	5.7	13.0	3.4	6.2	10.0	30.0	12.0

L suffix on Item No. denotes long internal copper sleeve.