


Industrial Motors
Commercial &
Appliance Motors
Automation
Digital &
Systems
Energy
Transmission &
Distribution
Coatings

CWB - CONTACTORS

Compacts in size.
Giants in technology.

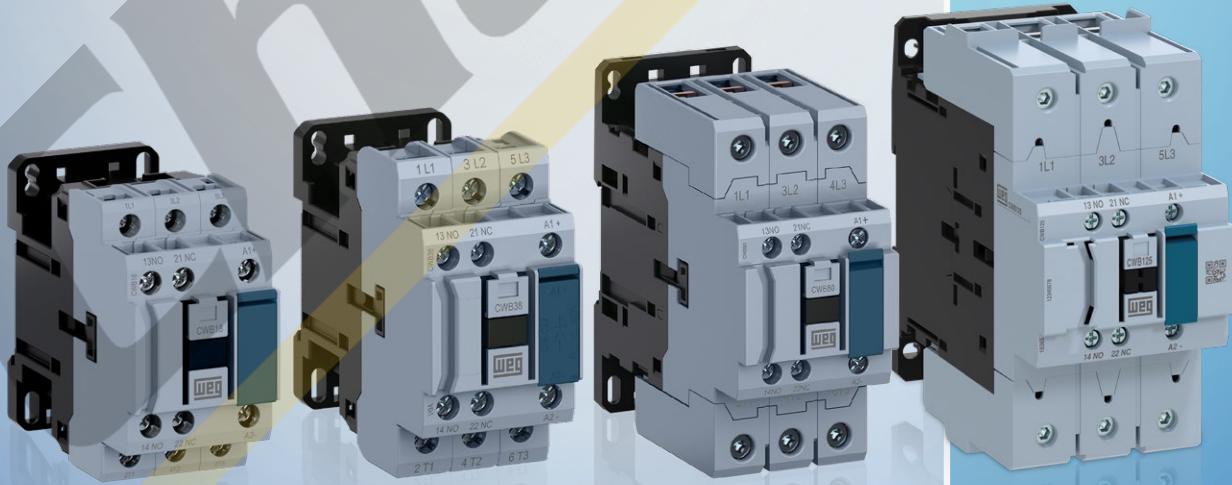


Driving efficiency and sustainability



SUMMARY

Presentation	04
Main characteristics	04
Benefits	05
Certifications	05
Technology within your reach	06
Energy savings	07
Space optimization in electrical panels	08
Flexibility and modularity in assembly of electric panels	10
Construction characteristics	12
Applications	13
Selection table	14
Reliability and safety	15
Accessory overview	16
Accessories	20
Application forms	24
Direct online starter	25
Reversing starters	27
Star-delta starters	29
Contactors for lighting circuits	32
Technical data	35
Dimensions	49



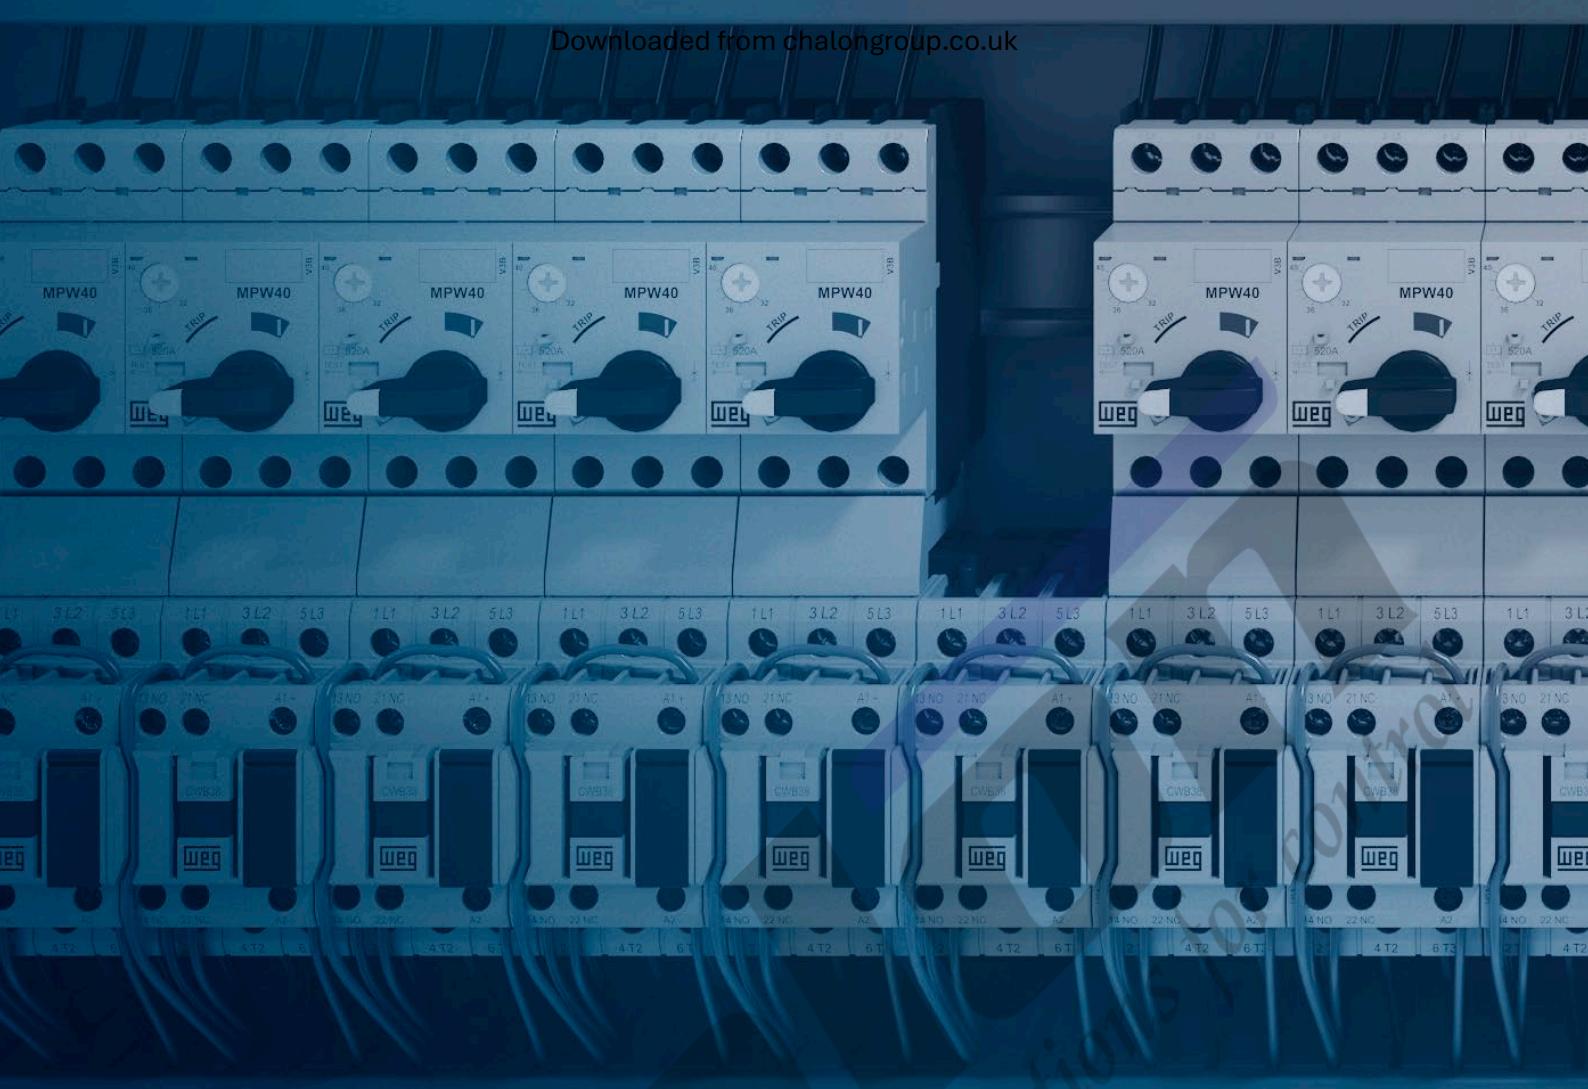


COMPACTS IN SIZE. GIANTS IN TECHNOLOGY.

Developed according to IEC/EN 60947 and UL 60947 international standards, the CWB and CAWB line of contactors complies with the global requirements of a wide range of industrial applications.

Main characteristic

- Currents from 9 to 225 A (AC-3)
- Supply voltage from 12 to 600 V
- Low consumption coils
- Compact product
- Built-in auxiliary contacts (1NO and 1NC)
- Four pole versions from 25 to 32 A (AC-1)
- Enclosure for surge suppressors
- Easy identification of the control voltage
- “Zero-width” mechanical interlock

- Easy connection busbars for quick assembly of more compact reversing and star-delta starters
- Compact starters can be assembled with the MPW manual motor protectors and RW overload relays
- Choice of up to six auxiliary contacts on the power contactors
- Compatible with accessories of the whole CWB line
- 45 mm wide auxiliary contactors and five built-in contacts
- Quick mounting on DIN rail 35 mm or with screw

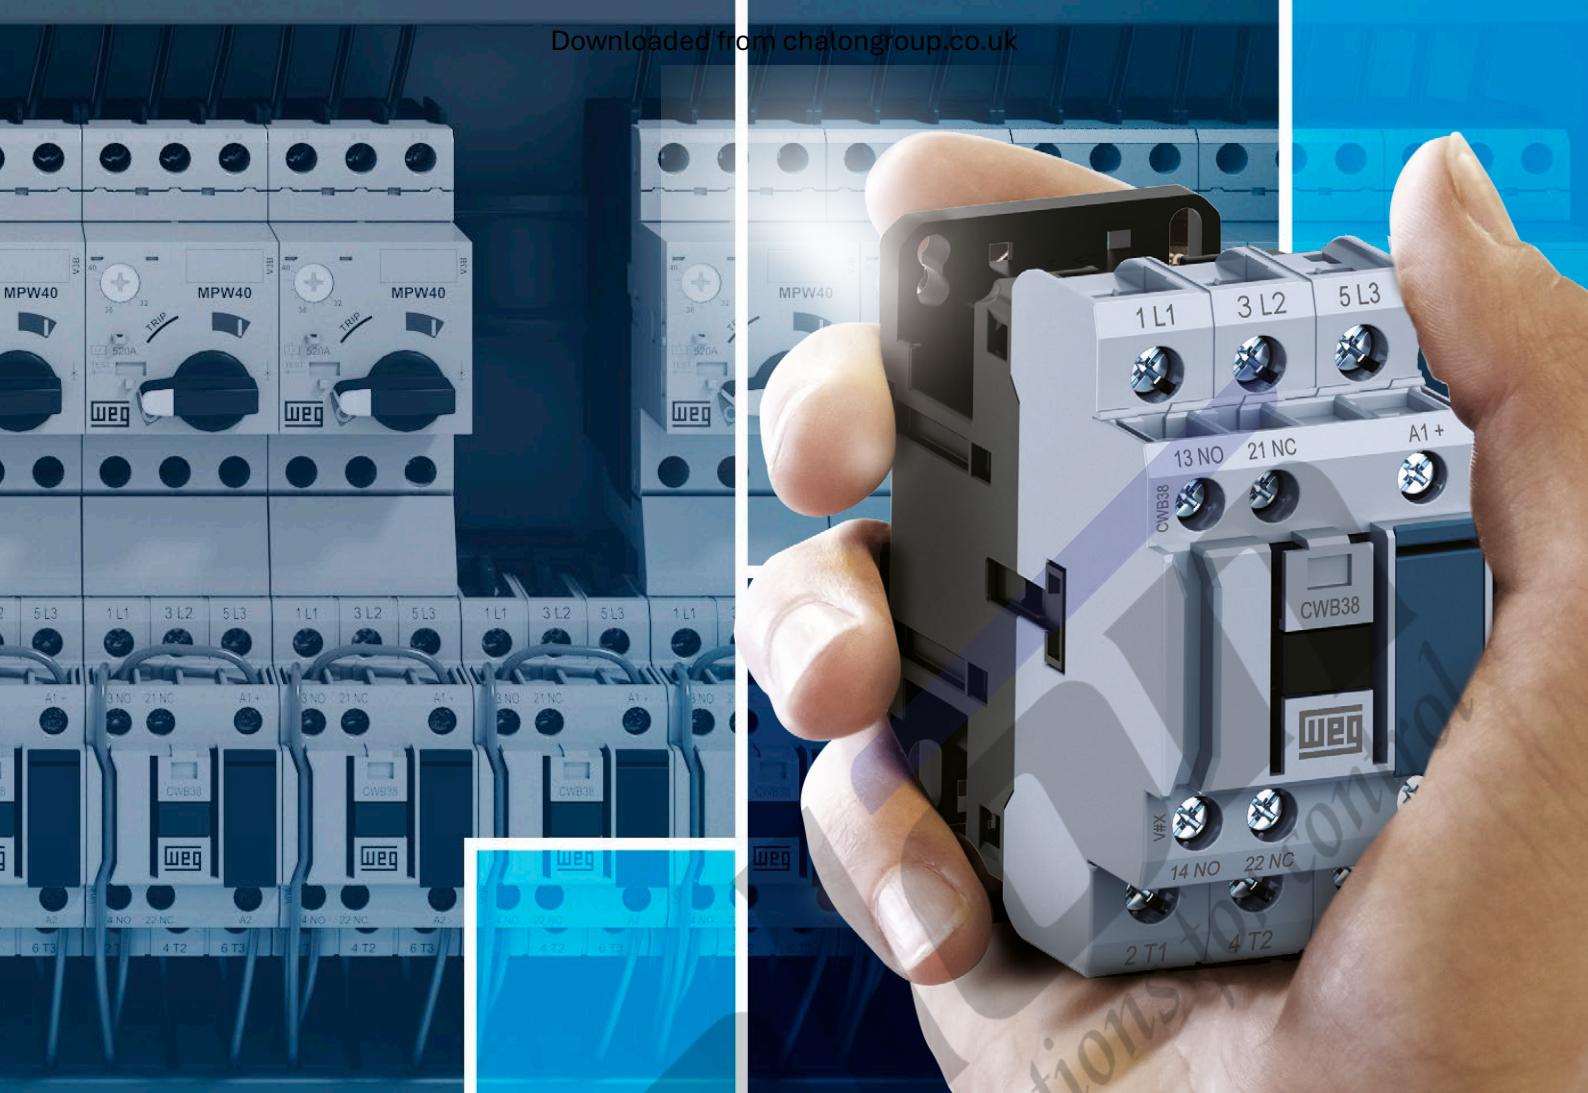

Benefits



Modular and compact



Suitable for different applications



Highly reliable



Internationally-recognized quality



Simplified installation



Energy saving

Certifications



European Union



United Kingdom



Canada and USA



Argentina



SABS - South Africa
South Africa




Colombia



Russia


Note: 1) Please consult the availability of certification with your sales representative.

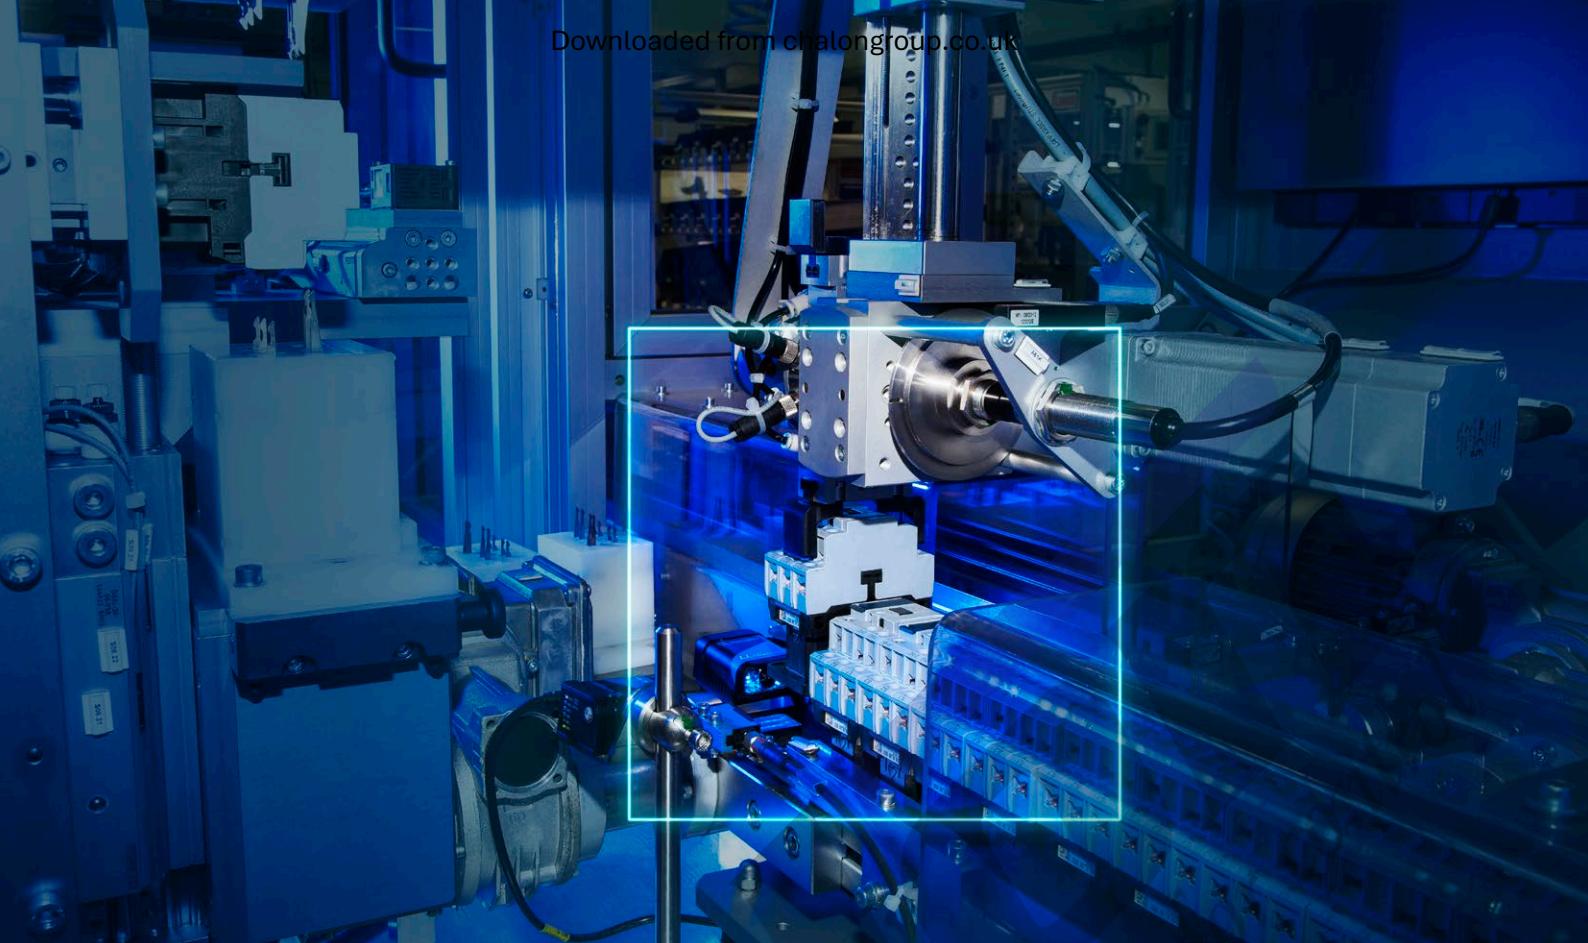


Technology within your reach

The use of finite-element analysis and state-of-the-art modeling softwares for simulation of electromagnetic and electromechanical systems provide WEG CWB contactors with an improved project with reduced contact bouncing. The outcome reached by WEG's R&D team ensures a product with long mechanical and electrical lifespan in a reduced size and with lower energy consumption.

The electric contacts of CWB contactors are manufactured with special silver alloys which ensure excellent electric conductivity and high contact reliability. During operation, the double-break contacts and arc chutes ensure fast arc quenching and provide high resistance against the wear effects of the electric arc and, consequently, a long electrical lifespan.

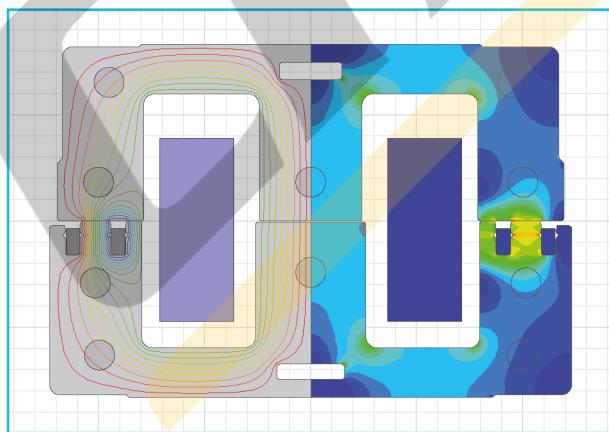

Analysis of CWB electromagnetic system

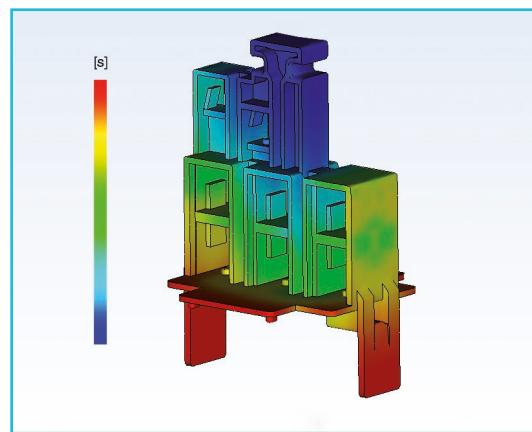

Process manufacturing simulation to ensure high quality of the injected parts

Manufactured with the best raw materials and high-quality parts, the CWB line uses high-precision injection molds and metal stamping tools, ensuring very reliable products with the best cost-benefit on the market.

Energy savings

Low consumption coils

The low-consumption coils of the CWB contactors enable safe operation with minimum energy consumption of up to 5.8 W in direct current, and up to 7.5 VA in alternating current (for power contactors up to 38 A and auxiliary contactors). In addition to the energy saving, the low consumption of the contactor coils allows using power supplies and transformers with lower rated power. When well dimensioned and properly applied, the traditional electric motor starting methods, such as direct online (reversing and non-reversing) and star-delta starters that use contactors, are the safest and the best cost-benefit options to start and protect low-voltage electric motors. Up to at least 55 kW, direct online starters and star-delta starters that use contactors are still the best and most common starting method in all kinds of industry in the whole world. Even when electronic methods are used to start and control motors, such as frequency inverters and soft-starters, contactors are still necessary in combination with the electronic devices.

Consequently, we can imagine the huge number of contactors installed and in operation, consuming energy in the whole world.

That is why the CWB contactors were designed to operate safe and reliably with the **lowest energy consumption**.

Coil consumption

DC operated contactor



Standard contactor



CWB3...38, CAWB

Energy saving
30%

DC coils and AC/DC electronic coils

The low power consumption characteristics mean that contactors can often be connected directly to the digital outputs of products such as PLCs, frequency inverters, soft-starters and others, without the need for interface relays.



Green




Manufactured with nontoxic and low-impact materials, the CWB line of contactors is safe and sustainable, complying with the RoHS international requirements.

Space optimization in electrical panels

Compact solution

As they are compact, 45 mm wide available in up to 38 A (18.5 kW at 380 V AC-3 three-phase), 54 mm wide available from 40 to 80 A (37 kW at 380 V AC-3 three-phase), and 72 mm wide available from 95 to 125 A (55 kW at 380 V AC-3 three-phase), the CWB contactors provide a general reduction in size of electrical panels in comparison to traditional solutions with contactors of the same specification.

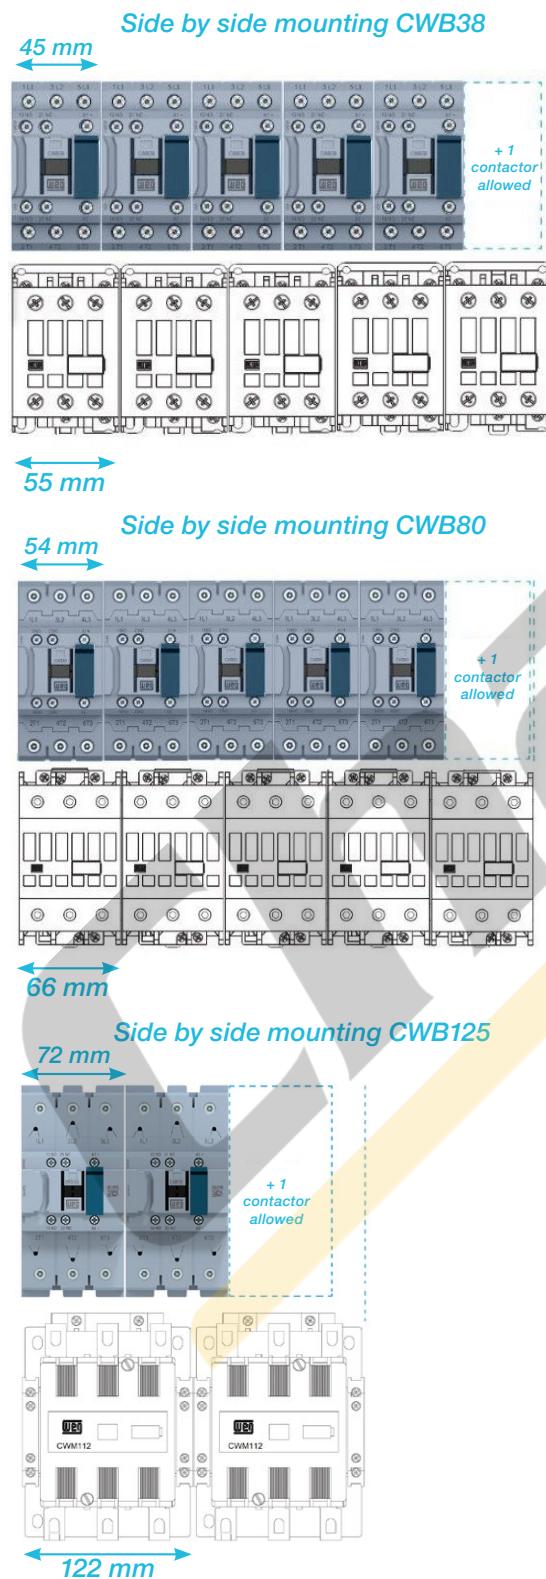


Built-in auxiliary contacts 1NO + 1NC

The configuration of the two built-in auxiliary contacts (1NO + 1NC) makes the application of the CWB contactors more flexible in most automation systems, contributing to the optimization of the internal space in electrical panels.



More simple and organized control circuits


In order to optimize the space in electrical panels even more, the CWB line of contactors has a front slot for passing control cables. That can reduce or eliminate the necessity of routing control cables through the side or front part of the contactors, providing a "cleaner" and more organized assembly of the control circuit.

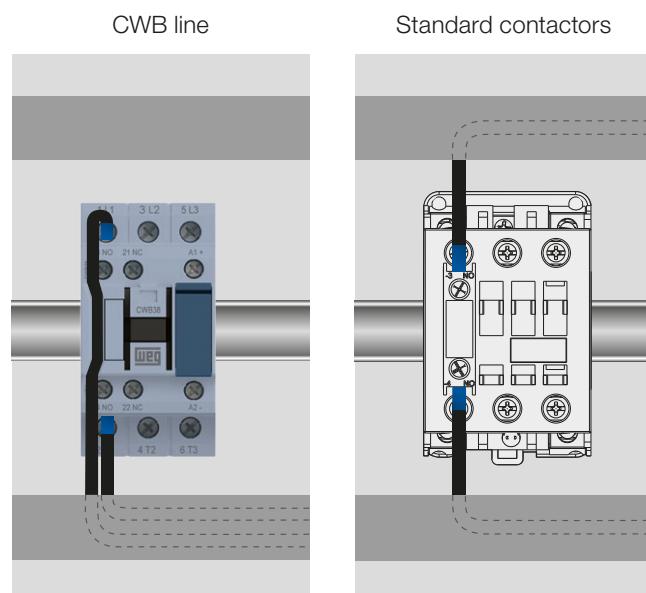

Space optimization in electrical panels

Simple and compact mounting of surge suppressor blocks

The coils of CWB contactors operate smoothly with a low level of disturbance in the control circuits. However, in order to reduce voltage surges due to the coil switching even further, WEG has developed surge suppressor blocks especially for the CWB line of contactors, which ensure limitation or even completely eliminate the undesired interferences that may be caused on opening the contactor coil. Surge suppressor blocks are easily mounted on CWB contactors without the need of any kind of tools and also without increasing volume.

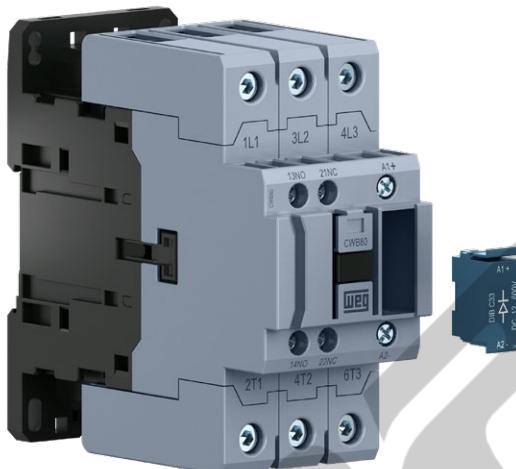

Contactor coil operated on AC or DC

The CWB line offers coil options for application on the most varied control voltages. The CWB contactors also have characteristics that guarantee easy replacement of the AC coils in currents from 9 to 125 A and DC coils in currents from 40 to 125 A.




CWB9...38 A
(AC coil)



CWB9...38 A
(DC coil)

“Zero-width” mechanical interlock

For applications which require a mechanical interlock between contactors WEG developed a new mechanical system that ensures compact and safe mounting without any tools. The new WEG mechanical interlocking system enables the mechanical interlock between the contactors of the CWB line without adding side space, and it is possible to mount reversing starters of up 125 A.

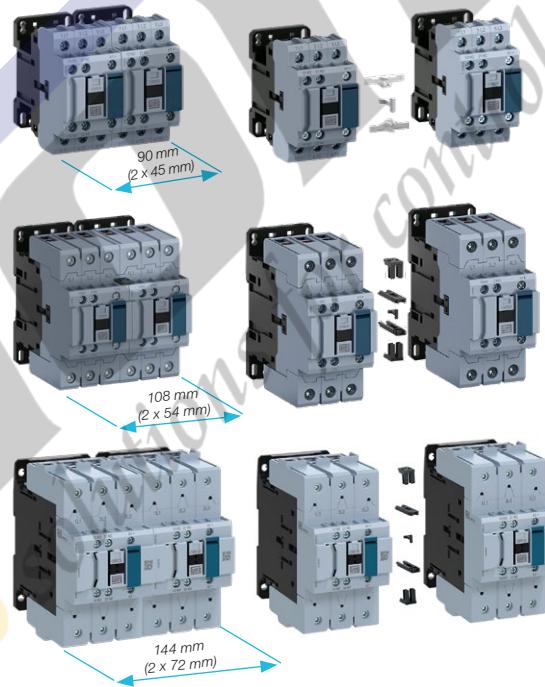

Four pole versions

Contactors with four poles from 25 to 32 A (AC-1) with the same width of three pole contactors (45 mm) and with two auxiliary contacts (built-in).








Flexibility and modularity in assembly of electric panels

Easy-connection busbars and connectors


The smooth integration between the CWB contactor line, overload relays and manual motor protectors enables simple and quick mounting of compact starters, besides protection sets for low-voltage electric motors with excellent cost effectiveness. The modularity and flexibility of the easy-connection busbars and connectors reduce the mounting time, also preventing possible errors. Available for the whole CWB line, the easy-connection system allows the mounting combined with WEG manual motor protectors and overload relays, forming compact and robust direct starters, reversing and non-reversing starters, in addition to star-delta starters.

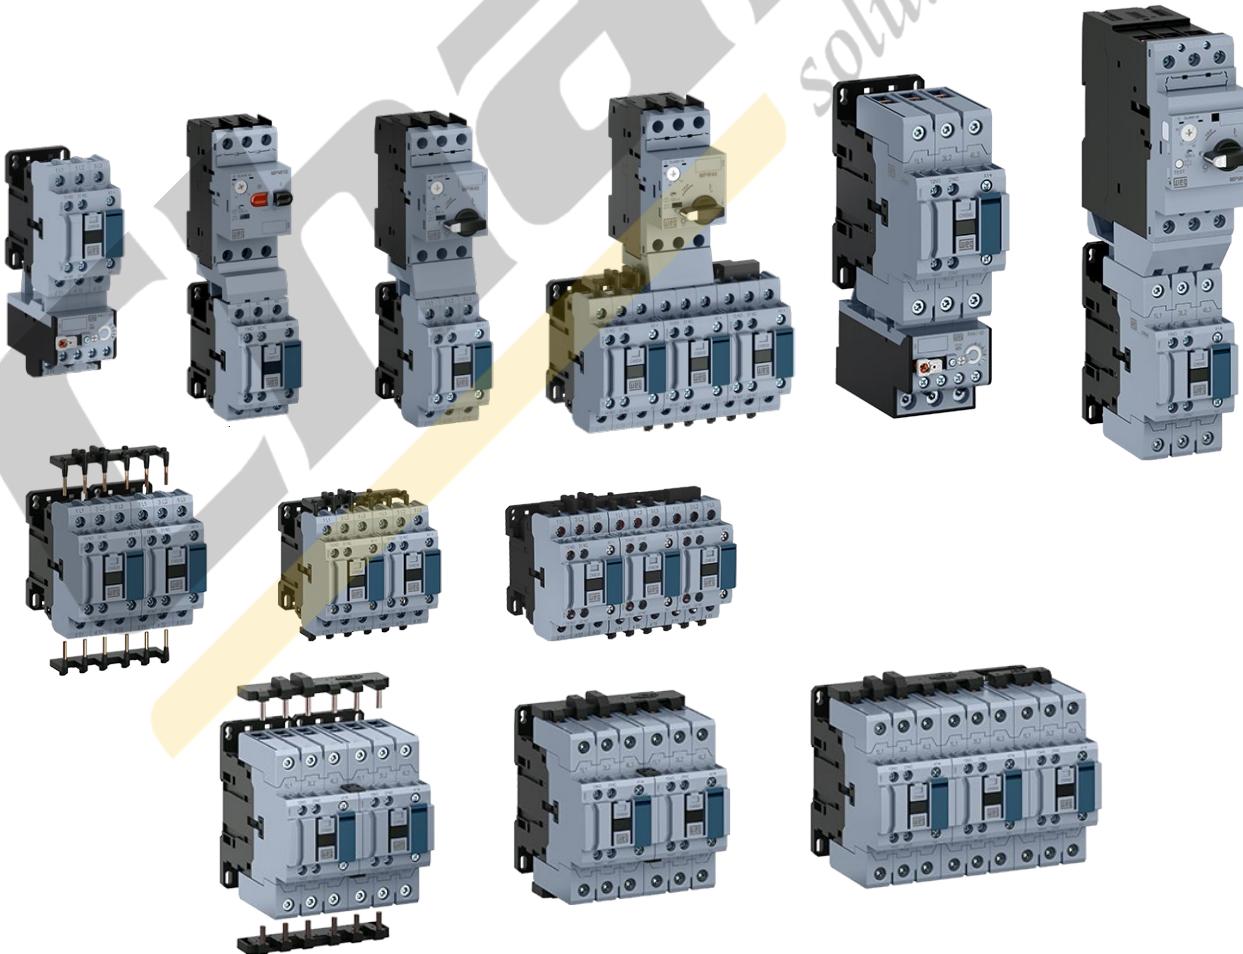

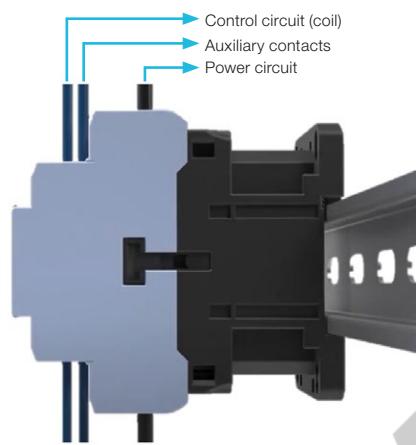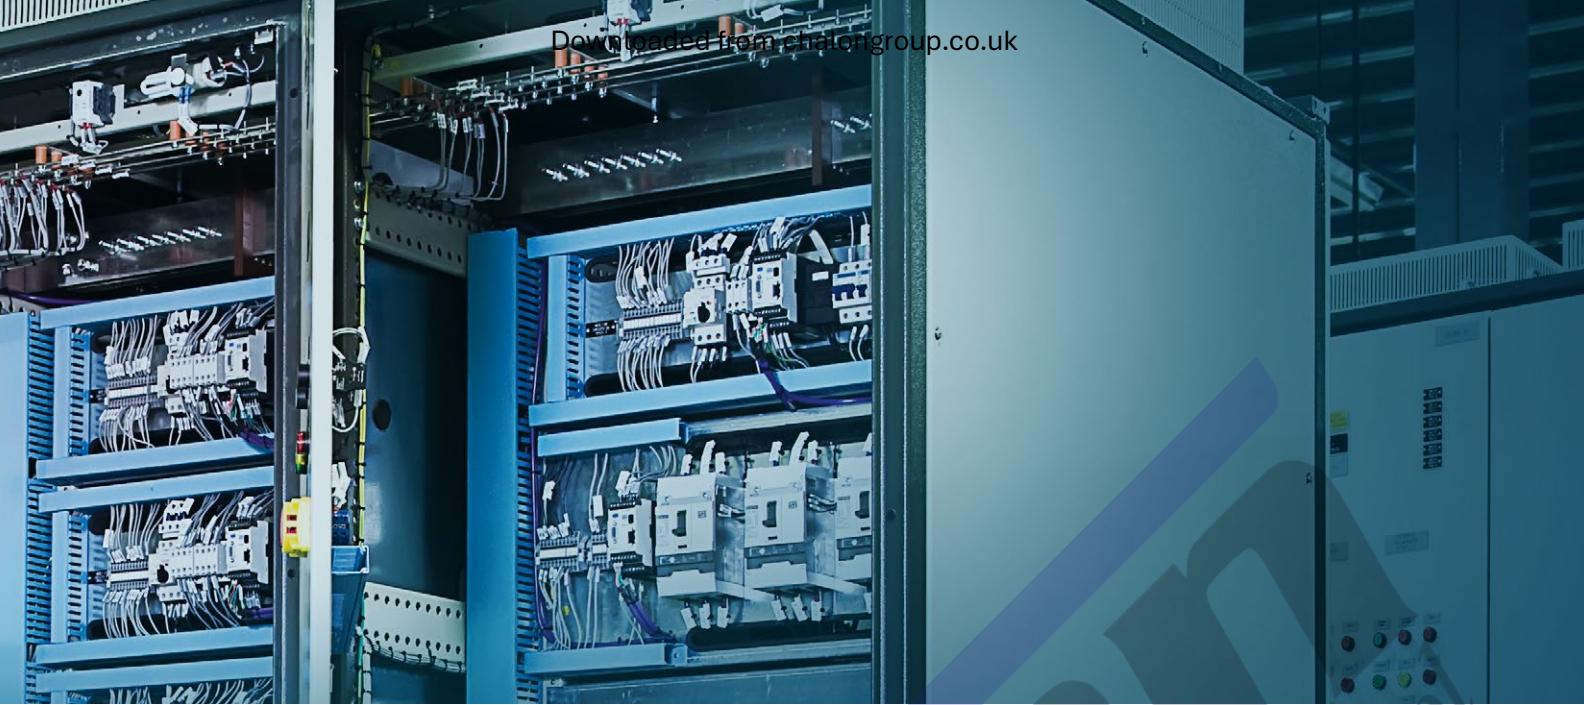

Easy access power and control terminals

All power terminals, auxiliary contacts and coils provide users with fast front access, facilitating installation, measurements and interventions for preventive and corrective maintenance of starters.

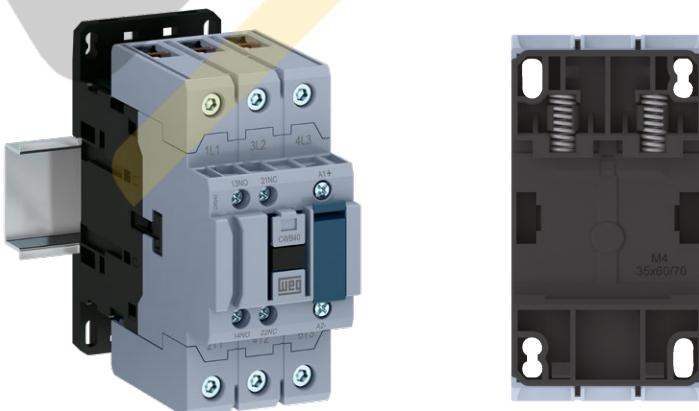


Additional contact blocks

In addition to the auxiliary contacts already built into the CWB contactors (1NO + 1NC), it is possible to increase their number up to 6 contacts by adding auxiliary contact blocks, available in version for front fitting (BFB) or side fitting (BLB/BLRB). These accessories are compatible with the entire line of 9 A to 125 A CWB power contactors and also with CAWB auxiliary contactors.

Panel assembly flexibility

CWB contactors can be easily assembled on panels using 35 mm DIN rails or screws because their oblong holes are compatible with the old and traditional lines of contactors on the market.

Construction characteristics

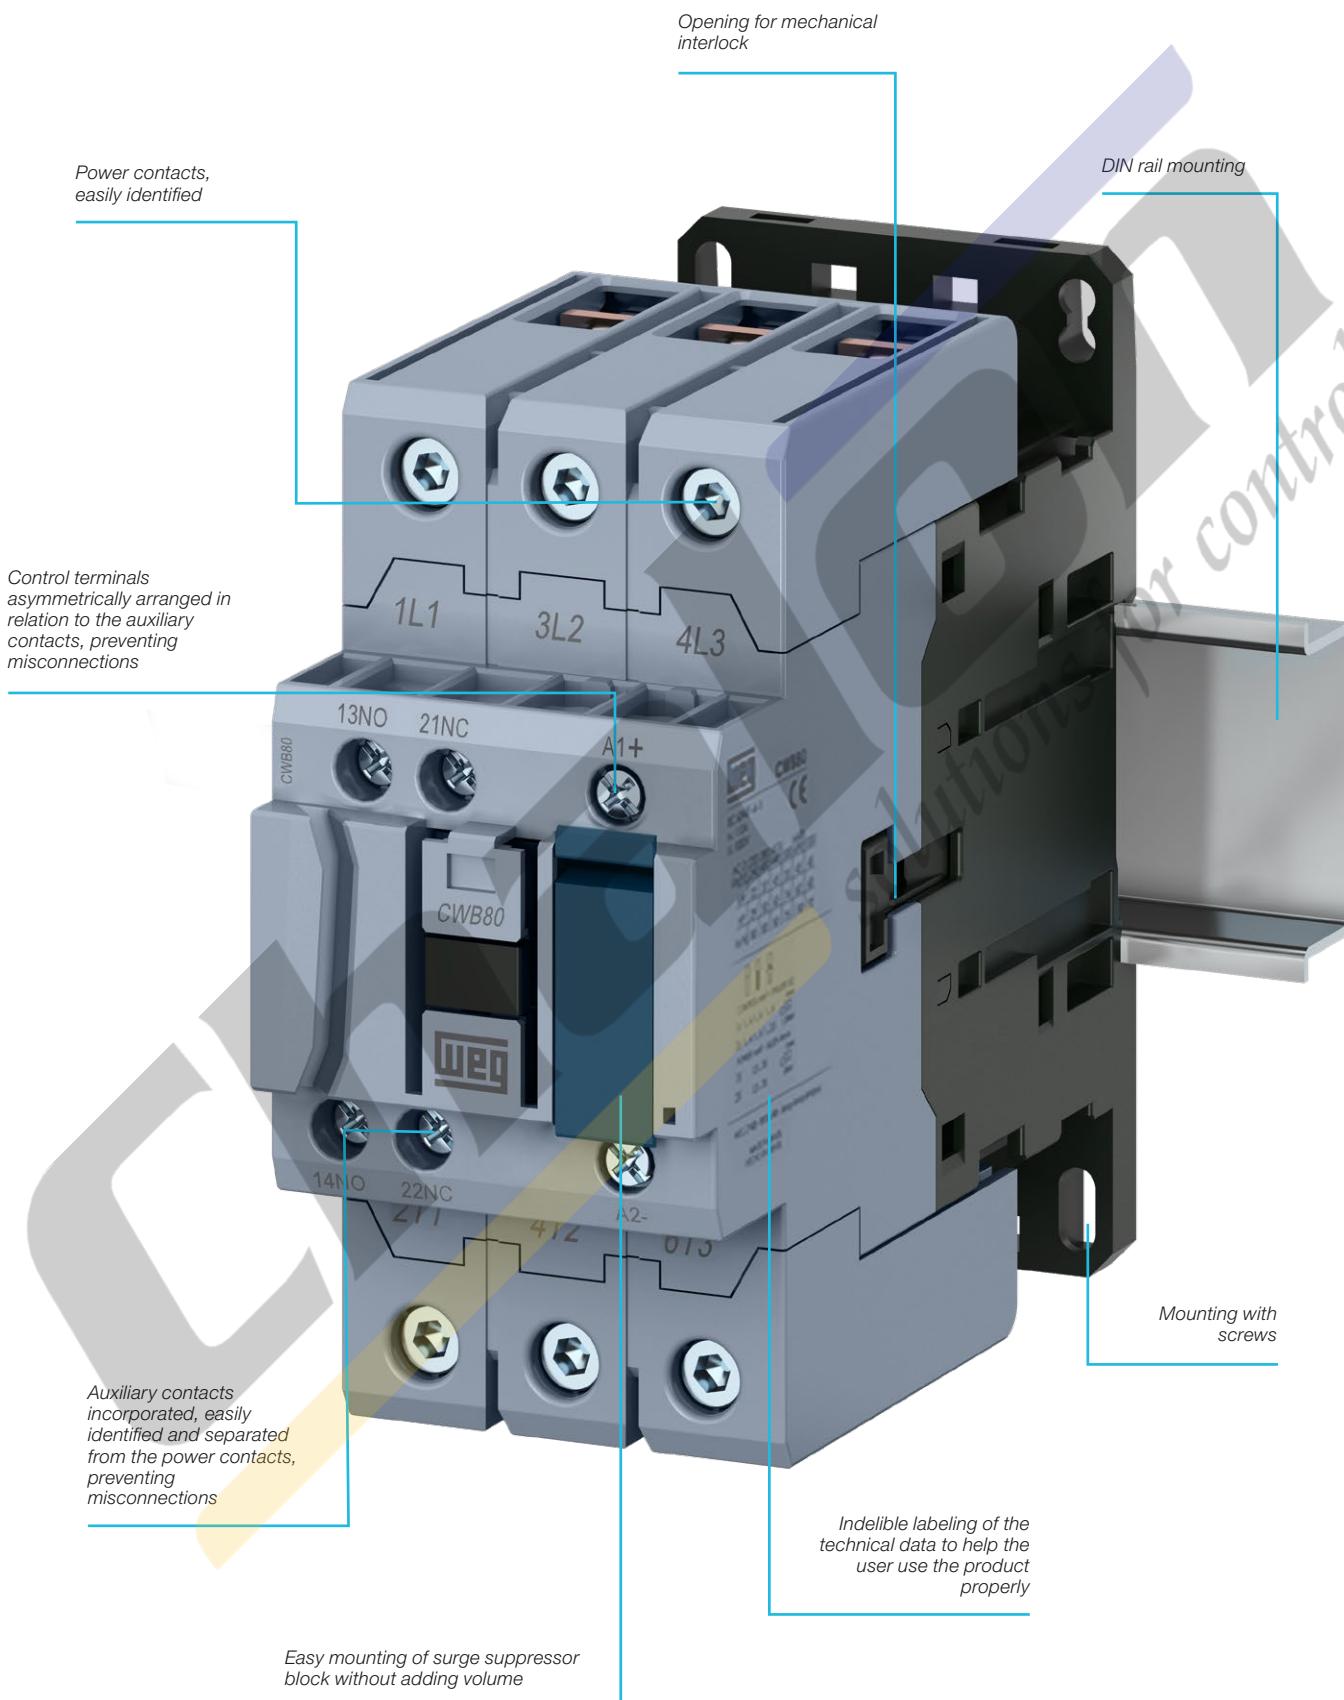

Applications

The characteristics of the CWB contactors make them suitable for applications in many different segments.



Paper & Cellulose



Wood



Cement



Chemical and Petrochemical



Mining



Steel



Oil & Gas



Irrigation and pumping systems



Sugar & Alcohol



Fans



Civil Construction



Refrigeration



Machines and processes in general



Load lifting



Automation



Selection table

Three-pole power contactors from 9 A to 225 A (AC-3)

I_e max. ($U_e \leq 440$ V)	$I_e = I_{th}$ ($U_e \leq 690$ V) $\theta \leq 55^\circ C$	Orientative rated operational power in AC-3 ¹⁾ Three-phase motor - IV poles - 60 Hz - 1,800 rpm						Auxiliary contacts per contactor		Reference to fill the control voltage in	Weight ²⁾ kg
A	A	kW / cv	kW / cv	kW / cv	kW / cv	kW / cv	kW / cv	*3 •4 NO	L *1 •2 NC		
9	25	2.2 / 3	4 / 5.5	4.5 / 6	5.5 / 7.5	5.5 / 7.5	5.5 / 7.5	1	1	CWB9-11-30♦	0.37
12	25	3 / 4	5.5 / 7.5	6.5 / 8.7	7.5 / 10	7.5 / 10	7.5 / 10	1	1	CWB12-11-30♦	0.37
18	32	4.5 / 6	7.5 / 10	9.2 / 12.5	10 / 13.4	11 / 15	11 / 15	1	1	CWB18-11-30♦	0.37
25	40	6.5 / 8.7	12.5 / 16.8	12.5 / 16.8	15 / 20	15 / 20	15 / 20	1	1	CWB25-11-30♦	0.41
32	50	7.5 / 10	15 / 20	15 / 20	18.5 / 25	18.5 / 25	18.5 / 25	1	1	CWB32-11-30♦	0.41
38	50	9.2 / 12.5	18.5 / 25	18.5 / 25	18.5 / 25	18.5 / 25	18.5 / 25	1	1	CWB38-11-30♦	0.41
40	60	11 / 15	18.5 / 25	22 / 30	22 / 30	30 / 40	30 / 40	1	1	CWB40-11-30♦	0.91
50	90	15 / 20	22 / 30	30 / 40	30 / 40	33 / 44	33 / 44	1	1	CWB50-11-30♦	0.91
65	110	18.5 / 25	30 / 40	37 / 50	37 / 50	37 / 50	37 / 50	1	1	CWB65-11-30♦	0.91
80	110	22 / 30	37 / 50	45 / 60	55 / 75	45 / 60	45 / 60	1	1	CWB80-11-30♦	0.91
95	140	22 / 30	45 / 60	55 / 75	55 / 75	55 / 75	55 / 75	1	1	CWB95-11-30♦	1.62
110	150	30 / 40	55 / 75	55 / 75	55 / 75	55 / 75	55 / 75	1	1	CWB110-11-30♦	1.62
125	175	37 / 50	55 / 75	75 / 100	75 / 100	75 / 100	75 / 100	1	1	CWB125-11-30♦	1.66
150	225	45 / 60	75 / 100	90 / 125	90 / 125	75 / 100	75 / 100	1	1	CWB150-11-30♦ ³⁾	3.30
180	275	55 / 75	90 / 125	110 / 150	110 / 150	90 / 125	90 / 125	1	1	CWB180-11-30♦ ³⁾	3.30
225	320	55 / 75	110 / 150	132 / 175	132 / 175	132 / 175	132 / 175	1	1	CWB225-11-30♦ ³⁾	3.30

Four-pole power contactors from 25 A to 32 A (AC-1)

$I_e = I_{th}$ ($U_e \leq 690$ V) $\theta \leq 55^\circ C$	Power contacts			Auxiliary contacts		Reference to fill the control voltage in	Weight ²⁾ kg
AC-1	*3 •4 NO	L *1 •2 NC	*3 •4 NO	L *1 •2 NC			
25	4	0	1	1	1	CWB9-11-40♦	0.38
25	2	2	1	1	1	CWB9-11-22♦	0.38
25	0	4	1	1	1	CWB9-11-04♦ ⁴⁾	0.38
25	4	0	1	1	1	CWB12-11-40♦	0.38
25	2	2	1	1	1	CWB12-11-22♦	0.38
25	0	4	1	1	1	CWB12-11-04♦ ⁴⁾	0.38
32	4	0	1	1	1	CWB18-11-40♦	0.38
32	2	2	1	1	1	CWB18-11-22♦	0.38
32	0	4	1	1	1	CWB18-11-04♦ ⁴⁾	0.38

Replace “♦” by the appropriate coil voltage code.

Notes: 1) Orientative values.

2) Weights for contactors with alternating current control circuit. For direct current control circuit, add 0.110 kg to the CWB9...18 models, 0.120 kg to the CWB25...38 models and 0.060 kg to the CWB5 80 models. For CWB95/110 with electronic coil add 0.010 kg.

CWB150...225 weight for RT version, for TB version add 0.210 kg.

3) Available in RT version (for connecting conductors with ring terminal or busbars) and TB version (for connecting cables with or without ferrules).

4) Available only with AC coils.



Selection table

Auxiliary contactors

I _e max. (A)		Auxiliary contacts		Reference	Weight (kg)
(U _e ≤ 230 V) AC-14 / AC-15	(U _e ≤ 24 V) DC-13	*3 •4 NO	*1 •2 NC		
6	4	1	4	CAWB-14-00♦	0.372
6	4	2	3	CAWB-23-00♦	0.372
6	4	3	2	CAWB-32-00♦	0.372
6	4	4	1	CAWB-41-00♦	0.372

Replace “♦” by the appropriate coil voltage code.

Alternating current (CWB9...110 / CAWB)

Code	D02	D07	D13	D23	D24	D25	D33	D34	D35	D36	D39
V (50/60 Hz)	24	48	110	220	230	240	380	400	415	440	480

Direct current (CWB9...80 / CAWB)

Code	C03	C07	C09	C12	C13	C15
V _{DC}	24	48	60	110	125	220

Alternating current/direct current with electronic module (CWB9...225)

Code	E04	E64	E65	E66
V _{AC} (50/60 Hz) and V _{DC}	24...60 V	48...130 V	110...255 V	250...500 V

Note: other voltages on request.

Reliability and safety

Safety against accidental contact

All the power and control terminals of the CWB contactors have degree of protection that ensure total safety against accidental front contacts.

Safety-related applications

In automation systems of machines and equipment, it is common to use special contactors in combination with specific safety relays. The CWB line allows such combination due to the arrangement of the contacts, which comply with the requirements of IEC/EN 60947-4-1 Annex F (Mirror Contacts) and IEC/EN 60947-5-1 Annex L (Mechanically Linked Contacts).




IEC/EN 60947-5-1
Mechanically linked contacts




IEC/EN 60947-4-1
Mirror contacts

Accessory overview

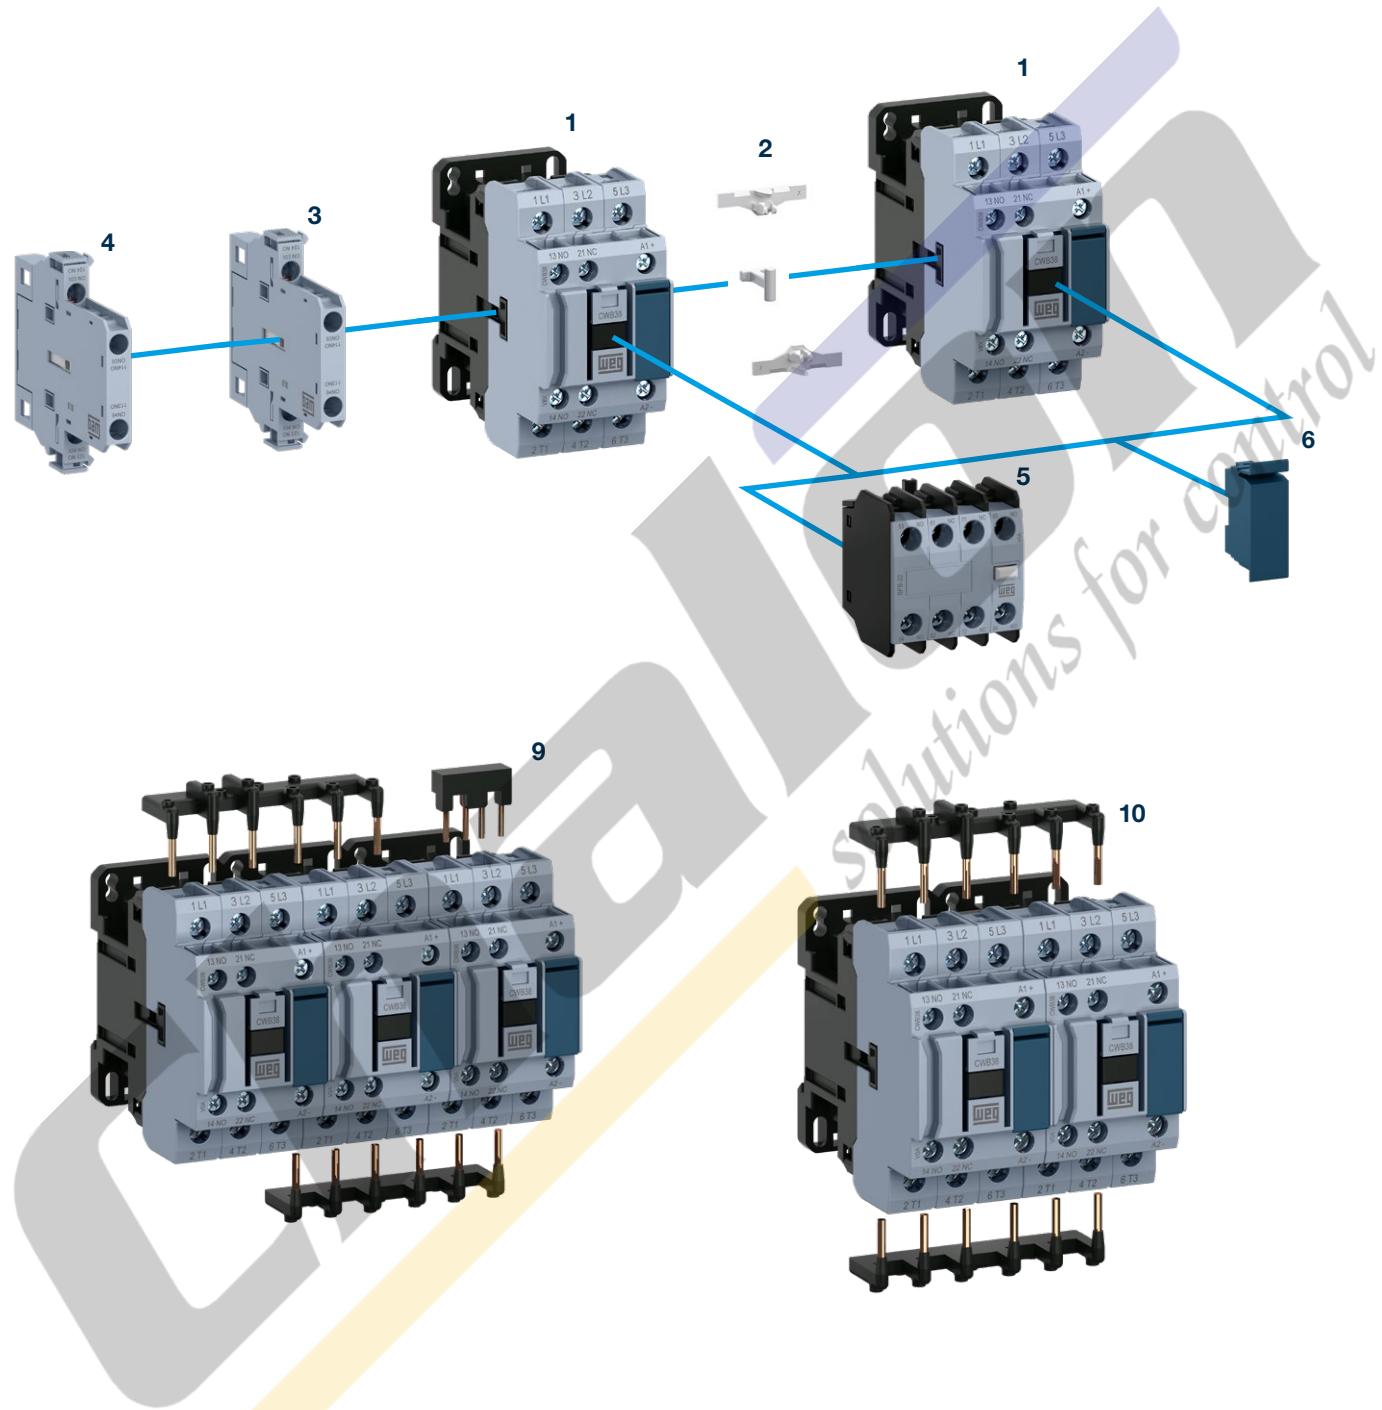


- 1** - CWB9 ... 38 or CAWB contactors
- 2** - "Zero" mechanical interlocking set (IM1)
- 3** - BLB side mounting auxiliary contact block
- 4** - BLRB side mounting auxiliary contact block
- 5** - BFB front auxiliary contact blocks
- 6** - Surge suppressor block

Accessory overview

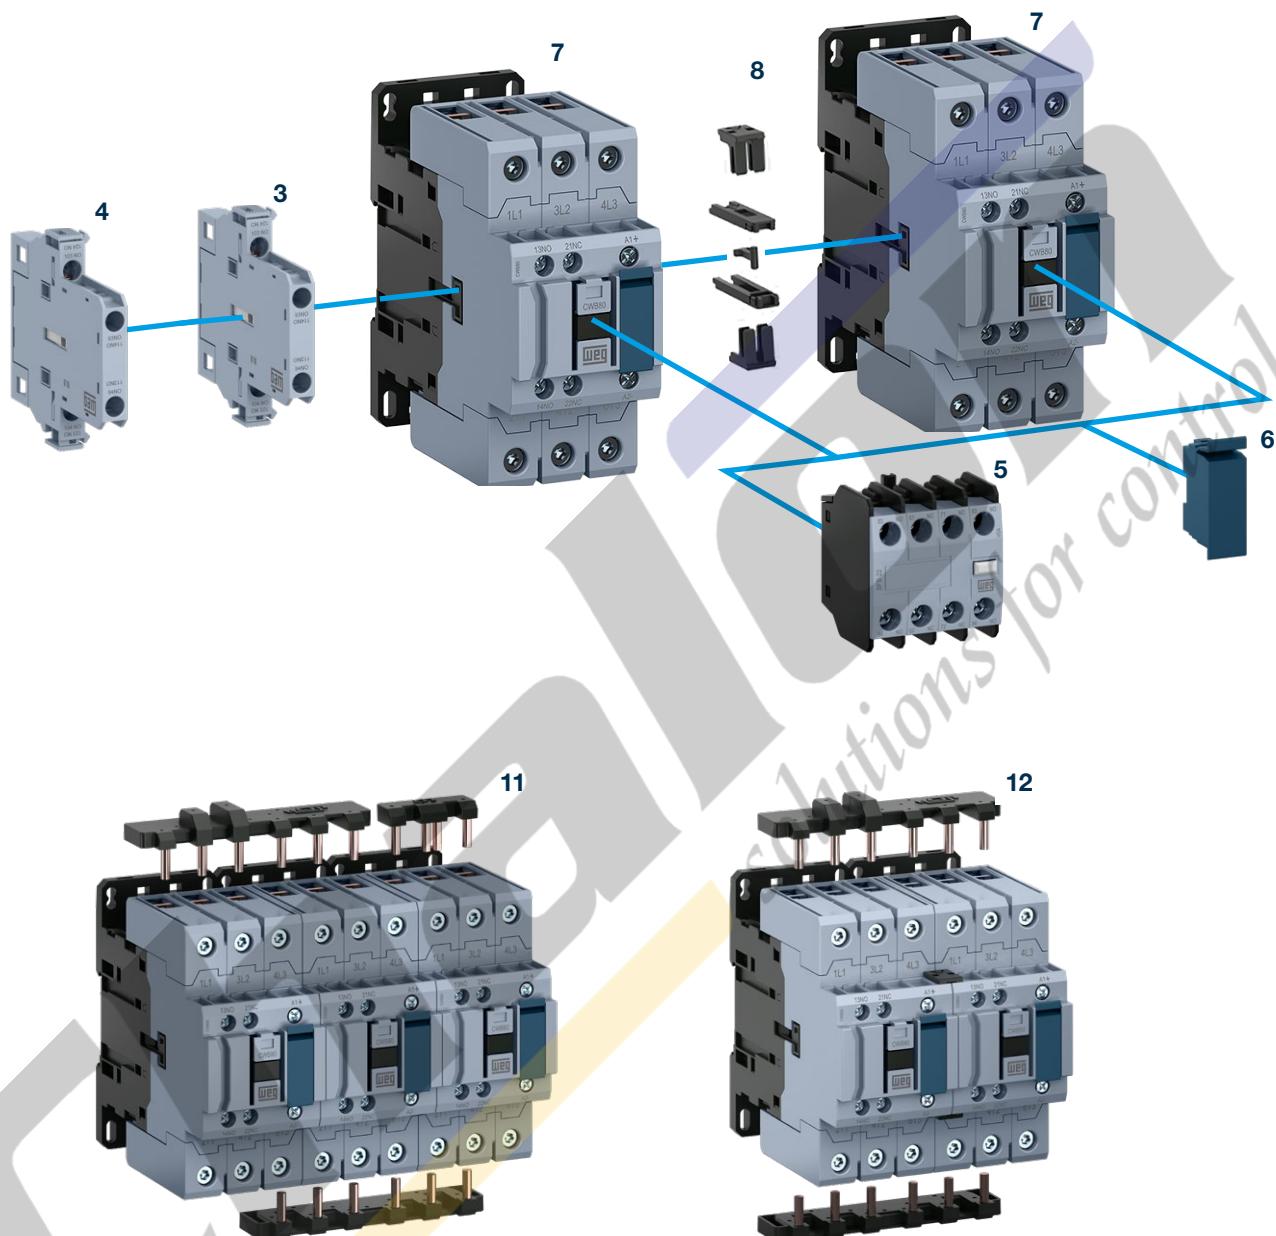

- 7 - CWB40...80 contactors**
- 8 - "Zero" mechanical interlocking set (IM2)**
- 9 - Busbar for quick connections for star-delta starters (EC-SD1)**
- 10 - Busbar for quick connections for reversing starters (EC-R1)**
- 11 - Busbar for quick connections for star-delta starters (EC-SD2)**
- 12 - Busbar for quick connections for reversing starters (EC-R2)**

Accessory overview

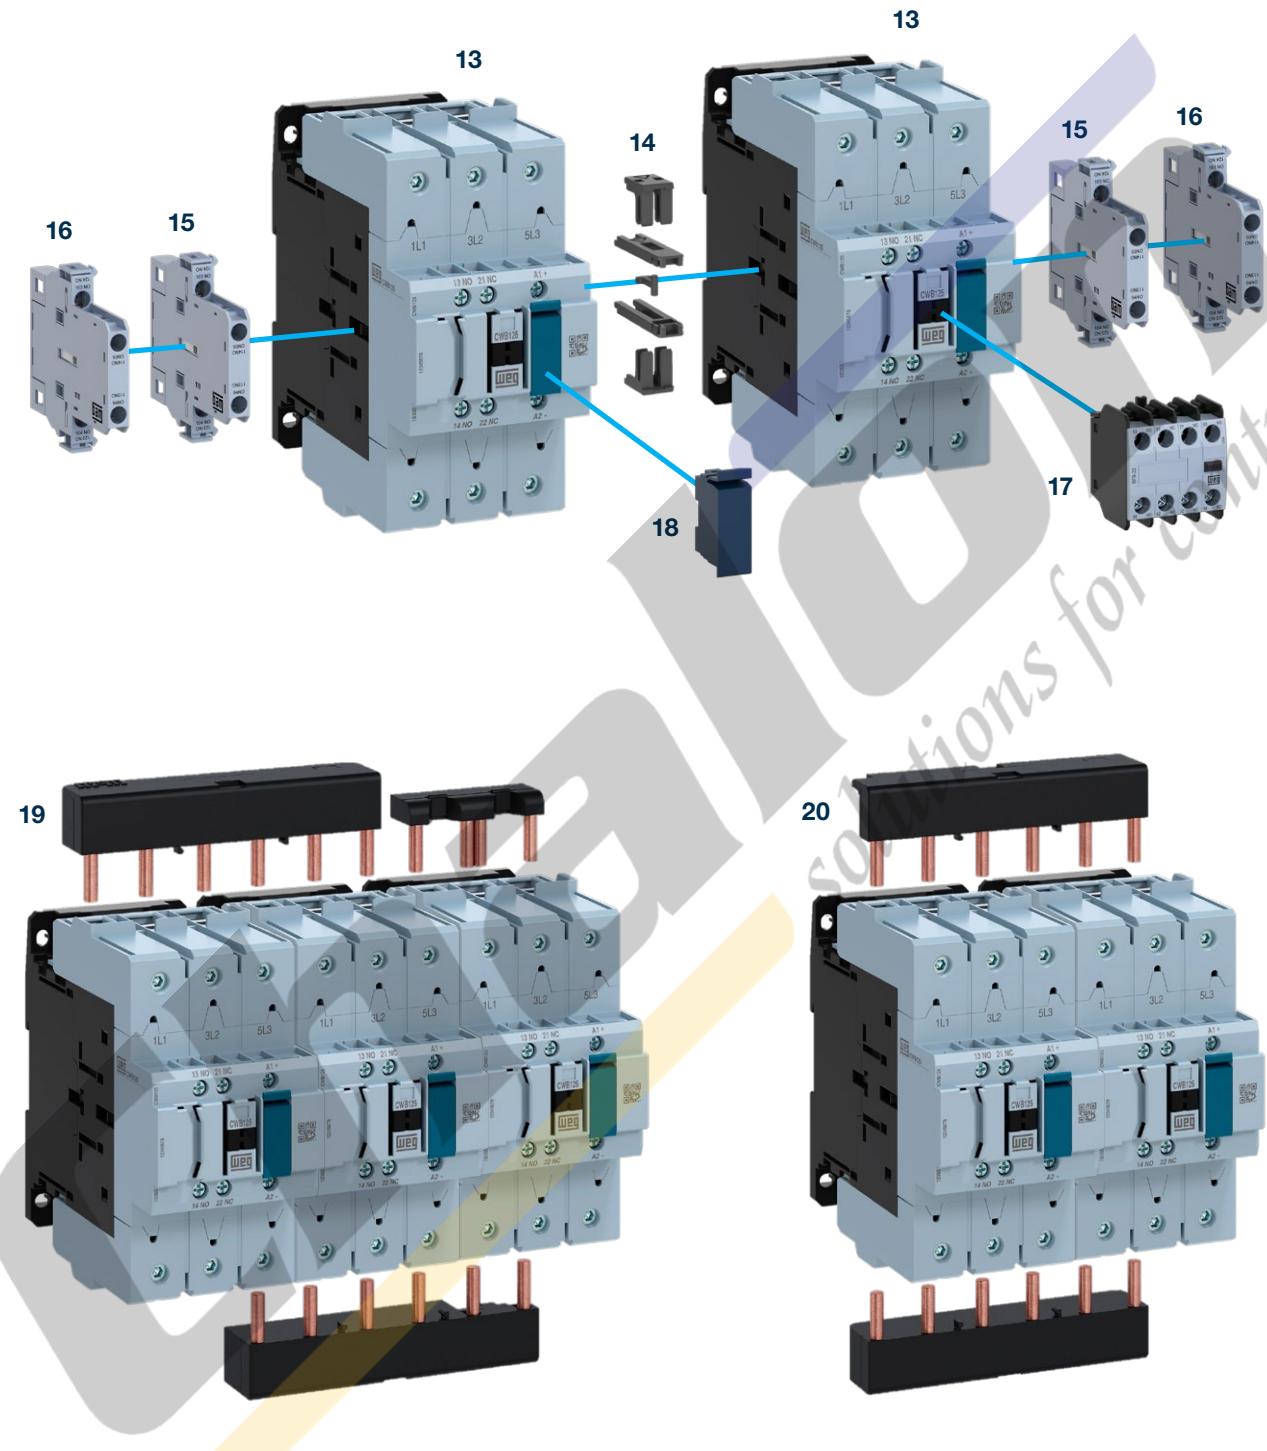

13 - CWB95...125 contactors

14 - IM2 mechanical interlocking set

15 - BLB side mounting auxiliary contact block

16 - BLRB side mounting auxiliary contact block


17 - BFB front mounting auxiliary contact block

18 - Surge suppressor block

19 - Busbar for quick connections for star-delta starters (EC-SD3)

20 - Busbar for quick connections for reversing starters (EC-R3)

Accessory overview

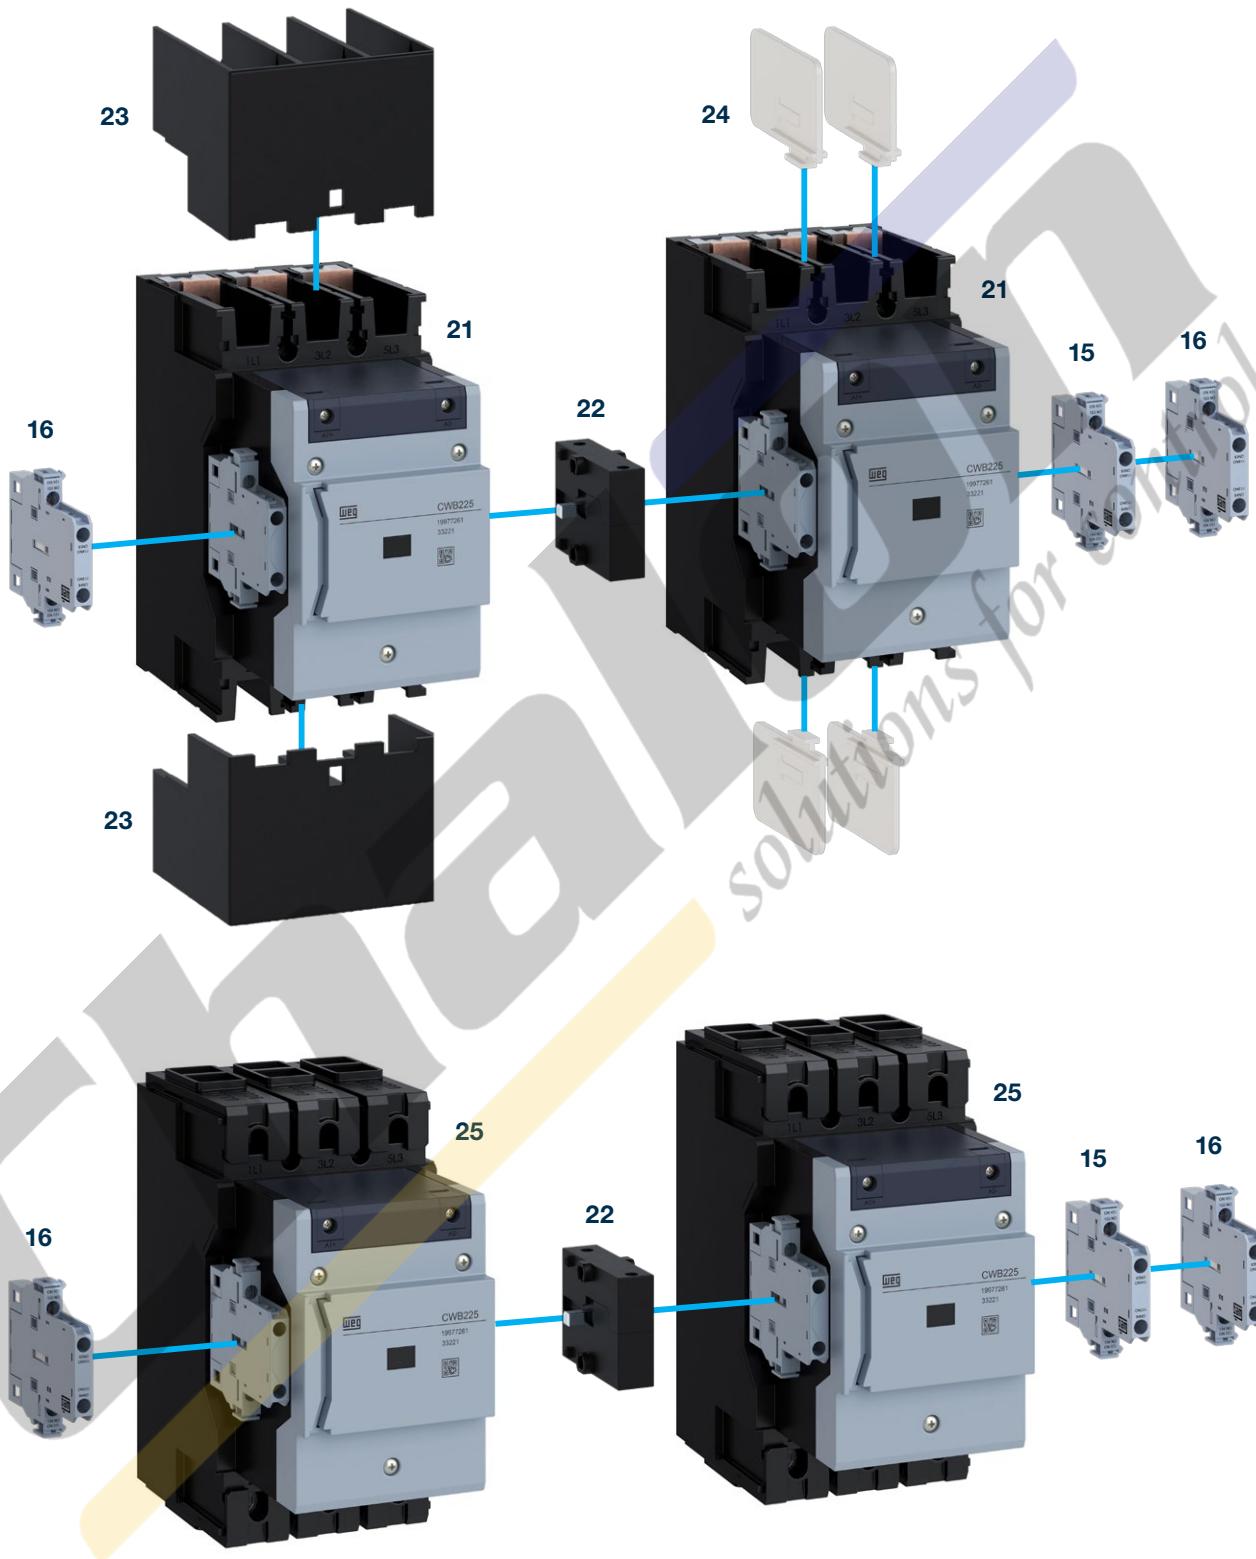

- 21** - CWB150...225_RT contactors
- 22** - IM3 mechanical interlocking block
- 23** - BMPCWB225 terminal cover
- 24** - Phase barrier CWB150-225
- 25** - CWB150...225_TB contactors

Accessories

Front mounted auxiliary contact blocks

Illustrative picture	For use with	Max. nº of additional contacts / contactor	Auxiliary contacts		Reference	Code	Weight kg
			NO	NC			
Auxiliary contact blocks according to IEC/EN 60947							
			1	1	BFB-11 ¹⁾	12123053	
			2	0	BFB-20	12122434	
			0	2	BFB-02 ¹⁾	12122946	
			2	2	BFB-22 ¹⁾	12123051	
			2 ²⁾	2 ²⁾	BFB-22 EL ²⁾	12771537	0.063
			4	0	BFB-40	12122947	
			0	4	BFB-04 ¹⁾	12123048	
			3	1	BFB-31 ¹⁾	12123049	
			1	3	BFB-13 ¹⁾	12123052	
Auxiliary contact blocks according to EN 50012							
			1	1	BFB-11 EN ¹⁾	12979242	
			2	0	BFB-20 EN	12979240	
			0	2	BFB-02 EN ¹⁾	12979241	
			2	2	BFB-22 EN ¹⁾	12979246	
			4	0	BFB-40 EN	12979243	
			0	4	BFB-04 EN ¹⁾	12979244	
			3	1	BFB-31 EN ¹⁾	12979245	
			1	3	BFB-13 EN ¹⁾	12979247	

Side mounted auxiliary contact block

Illustrative picture	For use with	Max. nº of additional contacts / contactor	Auxiliary contacts		Reference	Code	Weight kg
			NO	NC			
4 contacts ⁴⁾							
			1	1	BLB-11 ¹⁾	12187899	
			2	0	BLB-20	12187334	
			0	2	BLB-02 ¹⁾	12187898	
			1	1	BLRB-11 ¹⁾ ³⁾	12230321	
			2	0	BLRB-20 ³⁾	12230319	
			0	2	BLRB-02 ¹⁾ ³⁾	12230320	

Plug-in surge suppressors

Illustrative picture	For use with	Voltage	Diagram		Reference	Code	Weight kg
			NO	NC			
CWB9...110 CAWB							
		24...48 V 50/60 Hz	A1		RCBD53	12242511	
		50...127 V 50/60 Hz	A1		RCBD55	12242512	
		130...250 V 50/60 Hz	A1		RCBD63	12242513	
		12...48 V 50/60 Hz / 12...60 Vdc	A1		VRBE49	12242514	
		50...127 V 50/60 Hz / 60...180 Vdc	A1		VRBE34	12242515	
		130...250 V 50/60 Hz / 180...300 Vdc	A1		VRBE50	12242516	
		277...380 V 50/60 Hz / 300...510 Vdc	A1		VRBE41	12242517	
		400...510 V 50/60 Hz	A1		VRBD73	12242558	
		12...600 Vdc	A1		DIBC33 ⁵⁾	12242560	
		12...250 Vdc	A1		DIZBC26 ⁶⁾	12242561	

Notes: 1) They comply with the requirements of IEC/EN 60947-4-1 about mirror contacts and the requirements of IEC/EN 60947-5-1 about mechanically linked contacts.

2) It contains 1 early-make normally open contact, 1 late-break normally closed contact, 1 normally open contact and 1 normally closed contact.

3) For side mounting of two side-auxiliary contact blocks on the same contactor side.

4) CWB contactors allow a maximum of 8 auxiliary contacts (4 blocks) as long as there are 2 blocks on each side of the product.

5) Contactors assembled with surge suppressor DIB will increase in 6 times the opening time. Do not use in with BFB or BLB auxiliary contact blocks which contain NC contacts.

6) Contactors assembled with surge suppressor DIZB will increase in 4 times the opening time.

Accessories

Easy-connection setting of the power terminals for reversing starters


Illustrative picture	For use with		Oriental rated operational power for reversing starters (AC-4 duty) for three-phase 4-pole motors - 60 Hz - 1,800 rpm			Reference	Code	Weight kg
	K1=K2		220 V kW / cv	380 V kW / cv	440 V kW / cv			
	CWB9	1.5 / 2	2.2 / 3	2.2 / 3		EC-R1	12241229	0.042
	CWB12	1.5 / 2	3 / 4	3 / 4				
	CWB18	2.2 / 3	3.7 / 5	3.7 / 5				
	CWB25	3 / 4	5.5 / 7.5	5.5 / 7.5				
	CWB32	3.7 / 5	7.5 / 10.0	7.5 / 10				
	CWB38	3.7 / 5.0	7.5 / 10.0	7.5 / 10				
	CWB40	4.5 / 6.0	9.2 / 12.5	42309		EC-R2	13619637	0.110
	CWB50	5.5 / 7.5	11.0 / 15.0	11.0 / 15.0				
	CWB65	7.5 / 10.0	15.0 / 20.0	15.0 / 20.0				
	CWB80	11.0 / 15.0	18.5 / 25.0	22 / 30		EC-R3	15299958	0.245
	CWB95	15 / 20	22 / 30	30 / 40				
	CWB110	15 / 20	22 / 30	30 / 40				
	CWB125	18.5 / 25	30 / 40	37 / 50				
<p>Electric diagram</p>								

Power terminal easy-connection set for star-delta starter



Illustrative picture	For use with		Oriental rated operational power in AC-3 Three-phase motor - IV poles - 60 Hz - 1,800 rpm			Reference	Code	Weight kg
	K1=K2	K3	220 V kW / cv	380 V kW / cv	440 V kW / cv			
	CWB9	CWB9	3.7 / 5	7.5 / 10	7.5 / 10	EC-SD1	12241230	0.048
	CWB12	CWB9	5.5 / 7.5	9.2 / 12.5	11 / 15			
	CWB18	CWB12	7.5 / 10	15 / 20	15 / 20			
	CWB25	CWB18	11 / 15	22 / 30	22 / 30			
	CWB32	CWB18	15 / 20	22 / 30	30 / 40			
	CWB38	CWB25	18.5 / 25	30 / 40	37 / 50			
	CWB50	CWB40	22 / 30	45 / 60	55 / 75	EC-SD2	13619635	0.155
	CWB65	CWB40	30 / 40	55 / 75	55 / 75			
	CWB80	CWB50	37 / 50	55 / 75	75 / 100			
	CWB95	CWB95	45 / 60	75 / 100	90 / 125	EC-SD3	15300079	0.280
	CWB110	CWB110	55 / 75	90 / 125	110 / 150			
	CWB125	CWB125	55 / 75	110 / 150	132 / 175			
	<p>Electric diagram</p>							

Accessories

Mechanical interlock

Illustrative picture	For use with	Description	Reference	Code	Weight kg
	CWB9...38 / CAWB	Mounting set for interlocking two contactors with the same frame type. Fitting through snaps without tools.	IM1	12244300	0.01
	CWB40...80		IM2	13765620	0.01
	CWB95...125		IM3	15977134	0.08

Insulators and covers

Illustrative picture	For use with	Description	Reference	Code	Weight kg
	CWB150...225	Phase barrier (4 pieces kit)	PHASE BARRIER CWB125-225	17876729	0.18
	CWB150...225	Terminal cover (2 pieces kit)	BMP CWB225	17569506	0.40

Accessories

Spare coils for contactors

Illustrative picture	For use with	Control type	Reference to fill in with the control voltage	Code	Weight kg
	CWB9...38 / CAWB	AC	BRB-38◆	On request	0.08
	CWB40...80	AC	BRB-80◆	On request	0.09
		DC	BRB-80◆	On request	0.09
		AC/DC ¹⁾	BRB-80◆	On request	0.33
	CWB95/110	AC	BRB-110◆	On request	0.15
	CWB95...125	AC/DC ¹⁾	BRB-125◆	On request	0.16
	CWB150...225	AC/DC ²⁾	BRB-225◆	On request	0.20

Notes: 1) Supply with built-in electronic module.

2) Electronic module supplied separately. Must always be used in conjunction with an electronic module with the same voltage code.

Spare electronic modules

Illustrative picture	For use with	Control type	Reference to fill in with the control voltage	Code	Weight kg
	CWB150...225	AC/DC ¹⁾	ME-225◆	On request	0.08

Note: 1) The electronic module voltage code always must be the same of the contactor coil voltage code.

Replace “◆” by the appropriate coil voltage code.

Alternating current (CWB9...110/CAWB)

Code	D02	D07	D13	D23	D24	D25	D33	D34	D35	D36	D39
V (50/60 Hz)	24	48	110	220	230	240	380	400	415	440	480

Direct current (CWB9...80/CAWB)

Code	C03	C07	C09	C12	C13	C15
V _{DC}	24	48	60	110	125	220

Alternating current/direct current with electronic module (CWB9...225)

Code	E04	E64	E65	E66
V _{AC} (50/60 Hz) and V _{DC}	24...60 V	48...130 V	110...255 V	250...500 V

Application forms

Motor starters

With the CWB contactors, the MPW manual motor protectors and the RW overload relays, WEG offers a complete line of compact starters that stand out on the market.

Easy installation


- Contactors, overload relays and manual motor protectors with a compact design
- Easy-connection bars for direct on-line, reversing and star-delta starters, saving mounting time
- Easy combination of all the starter parts
- Contactors with built-in auxiliary contacts 1NO + 1NC

Panel optimization

- 9 mm wide side contact blocks
- Compact starters
- "Zero" mechanical interlock without adding side space
- Simple and reliable parts

Easy operation


- High performance and reliability for a wide range of applications
- Energy savings
- Without peak currents for contactors with DC coil up to 38 A
- Built-in overload and short-circuit protections (when MPW is used)

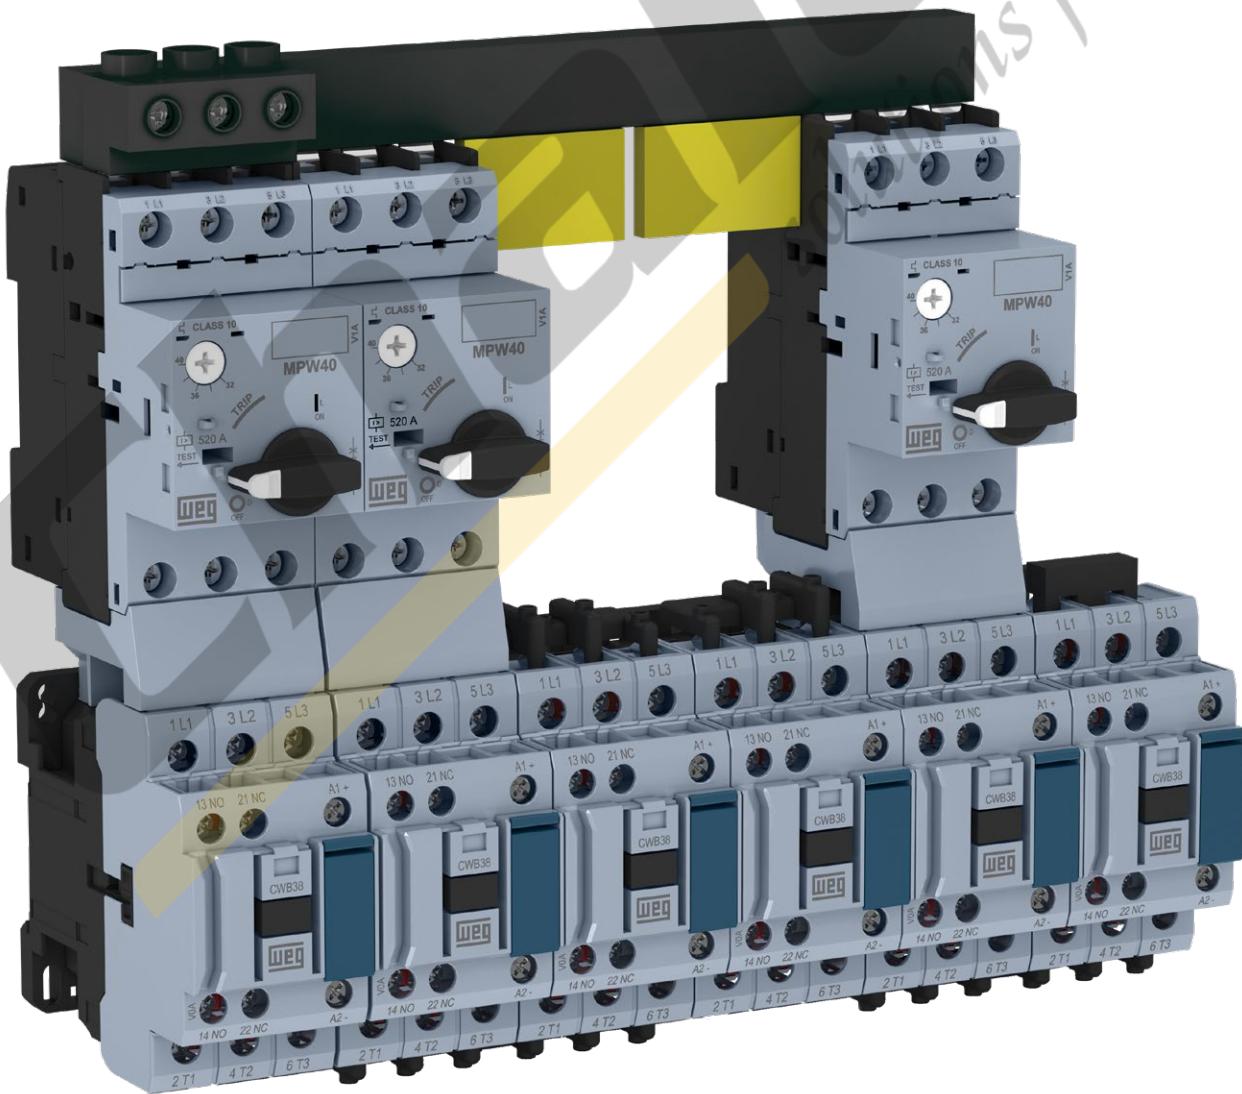

Direct online starter

CWB contactor + RW thermal overload relay

- Remote load handling
- Overload protection
- Phase-loss sensitive
- Trip class 10
- Temperature compensation
- DIN rail mounting by fixing only one part
- Manual/local or automatic reset

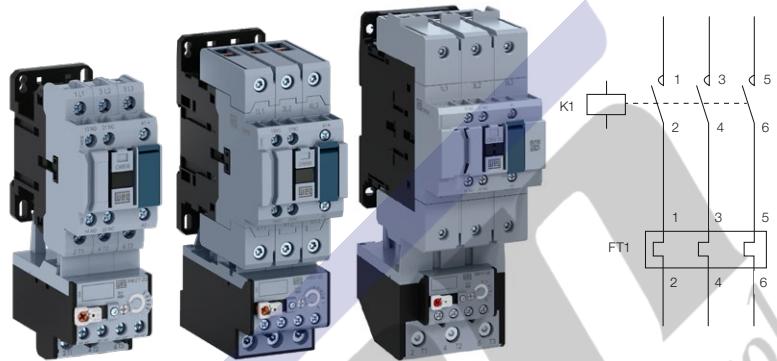

Motor current (A)	AC-3 contact		Overload relay		Fuse Maximum fuse (gL/gG) (coordination type 1) (A)
	Reference	Maximum rated current AC-3 (A)	Reference	Current I adjustment range (A)	
0.28...0.4	CWB9-11-30◆	9	RW27-2D3-D004	0.28...0.4	2
0.43...0.63	CWB9-11-30◆	9	RW27-2D3-C063	0.43...0.63	2
0.56...0.8	CWB9-11-30◆	9	RW27-2D3-D008	0.56...0.8	2
0.8...1.2	CWB9-11-30◆	9	RW27-2D3-D012	0.8...1.2	4
1.2...1.8	CWB9-11-30◆	9	RW27-2D3-D018	1.2...1.8	6
1.8...2.8	CWB9-11-30◆	9	RW27-2D3-D028	1.8...2.8	6
2.8...4	CWB9-11-30◆	9	RW27-2D3-U004	2.8...4	10
4...6.3	CWB9-11-30◆	9	RW27-2D3-D063	4...6.3	16
5.6...8	CWB9-11-30◆	9	RW27-2D3-U008	5.6...8	20
7...9	CWB9-11-30◆	9	RW27-2D3-U010	7...10	25
8...12	CWB12-11-30◆	12	RW27-2D3-D125	8...12.5	25
10...15	CWB18-11-30◆	18	RW27-2D3-U015	10...15	35
11...17	CWB18-11-30◆	18	RW27-2D3-U017	11...17	40
15...23	CWB25-11-30◆	25	RW27-2D3-U023	15...23	50
22...32	CWB32-11-30◆	32	RW27-2D3-U032	22...32	63
32...40	CWB38-11-30◆	38	RW27-2D3-U040	32...40	90
25...40	CWB40-11-30◆	40	RW67-5D3-U040	25...40	80
32...50	CWB50-11-30◆	50	RW67-5D3-U050	32...50	100
40...57	CWB65-11-30◆	65	RW67-5D3-U057	40...57	100
50...63	CWB65-11-30◆	65	RW67-5D3-U063	50...63	100
57...70	CWB80-11-30◆	80	RW67-5D3-U070	57...70	125
63...80	CWB80-11-30◆	80	RW67-5D3-U080	63...80	125
63...80	CWB95-11-30◆	95	RW117-3D3-U080	63...80	200
75...95	CWB95-11-30◆	95	RW117-3D3-U097	75...97	200
90...110	CWB110-11-30◆	110	RW117-3D3-U112	90...112	250
110...125	CWB125-11-30◆	125	RW117-3D3-U140	110...140	315

Notes: Reference values valid for operating voltages up to 440 V, altitude up to 2,000 m, ambient temperature range from -20 °C to +55 °C, and maximum switching frequency up to 15 operations/hour.

For other conditions, check the technical data of each part.

Replace “◆” by the appropriate coil voltage code.

Alternating current (CWB9...110/CAWB)

Code	D02	D07	D13	D23	D24	D25	D33	D34	D35	D36	D39
V (50/60 Hz)	24	48	110	220	230	240	380	400	415	440	480

Direct current (CWB9...80/CAWB)

Code	C03	C07	C09	C12	C13	C15
V _{DC}	24	48	60	110	125	220


Alternating current/direct current with electronic module (CWB9...125)

Code	E04	E64	E65	E66
V _{AC} (50/60 Hz) and V _{DC}	24...60 V	48...130 V	110...255 V	250...500 V

Direct online starter

CWB contactor + MPW manual motor protectors

- Remote load handling
- Overload protection
- Phase-loss sensitive
- Temperature compensation
- DIN rail mounting by fixing only one part
- Manual/local reset
- Isolation and disconnection functions
- Protection against short-circuit
- High short-circuit interrupting capacity
- Short-circuit tripping device fixed at 13 x I_u

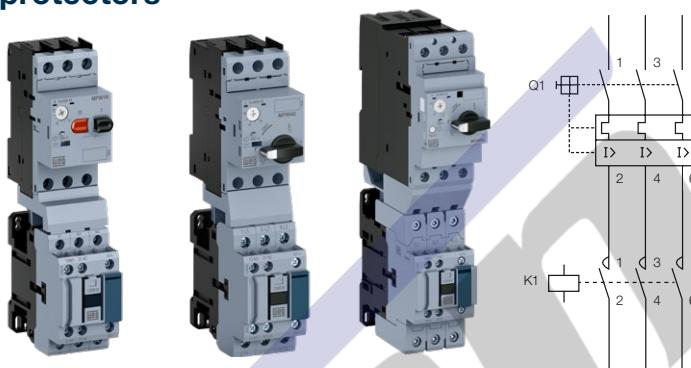

Motor current (A)	AC-3 contactor		Motor-protective circuit breaker			Accessories
	Reference	Maximum rated current AC-3 (A)	Reference	Current I adjustment range (A)	Instantaneous magnetic trip (I _m) (A)	
0.1...0.16	CWB9-11-30◆	9	MPW18-3-C016	0.1...0.16	2.0	
0.16...0.25	CWB9-11-30◆	9	MPW18-3-C025	0.16...0.25	3.2	
0.25...0.4	CWB9-11-30◆	9	MPW18-3-D004	0.25...0.4	5.2	
0.4...0.63	CWB9-11-30◆	9	MPW18-3-C063	0.4...0.63	8.1	
0.63...1	CWB9-11-30◆	9	MPW18-3-U001	0.63...1	13	
1...1.6	CWB9-11-30◆	9	MPW18-3-D016	1...1.6	20.8	
1.6...2.5	CWB9-11-30◆	9	MPW18-3-D025	1.6...2.5	32.5	
2.5...4	CWB9-11-30◆	9	MPW18-3-U004	2.5...4	52	
4...6.3	CWB9-11-30◆	9	MPW18-3-D063	4...6.3	81.9	
6.3...10	CWB12-11-30◆	12	MPW18-3-U010	6.3...10	130	
10...16	CWB18-11-30◆	18	MPW18-3-U016	10...16	208	
16...18	CWB18-11-30◆	18	MPW18-3-U020	16...20	260	
0.1...0.16	CWB9-11-30◆	9	MPW40-3-C016	0.1...0.16	2	
0.16...0.25	CWB9-11-30◆	9	MPW40-3-C025	0.16...0.25	3.2	
0.25...0.4	CWB9-11-30◆	9	MPW40-3-D004	0.25...0.4	5.2	
0.4...0.63	CWB9-11-30◆	9	MPW40-3-C063	0.4...0.63	8.1	
0.63...1	CWB9-11-30◆	9	MPW40-3-U001	0.63...1	13	
1...1.6	CWB9-11-30◆	9	MPW40-3-D016	1...1.6	20.8	
1.6...2.5	CWB9-11-30◆	9	MPW40-3-D025	1.6...2.5	32.5	
2.5...4	CWB9-11-30◆	9	MPW40-3-U004	2.5...4	52	
4...6.3	CWB9-11-30◆	9	MPW40-3-D063	4...6.3	81.9	
6.3...10	CWB12-11-30◆	12	MPW40-3-U010	6.3...10	130	
10...16	CWB18-11-30◆	18	MPW40-3-U016	10...16	208	
16...20	CWB25-11-30◆	25	MPW40-3-U020	16...20	260	
20...25	CWB25-11-30◆	25	MPW40-3-U025	20...25	325	
25...32	CWB32-11-30◆	32	MPW40-3-U032	25...32	416	
32...38	CWB38-11-30◆	38	MPW40-3-U040	32...40	520	
32...40	CWB40-11-30◆	40	MPW80-3-U040	32...40	520	
40...50	CWB50-11-30◆	50	MPW80-3-U050	40...50	650	
55...65	CWB65-11-30◆	65	MPW80-3-U065	55...65	845	
65...80	CWB80-11-30◆	80	MPW80-3-U080	65...80	1,040	
55...75	CWB95-11-30◆	95	MPW100-3-U075	55...75	975	
70...90	CWB95-11-30◆	95	MPW100-3-U090	70...90	1,170	
80...95	CWB95-11-30◆	95	MPW100-3-U100	80...100	1,300	
80...100	CWB110-11-30◆	110	MPW100-3-U100	80...100	1,300	

Notes: Reference values valid for operating voltages up to 440 V, altitude up to 2,000 m, ambient temperature range from -20 °C to +55 °C, and maximum switching frequency up to 15 operations/hour.

For other conditions, check the technical data of each part.

Replace “◆” by the appropriate coil voltage code.

Alternating current (CWB9...110/CAWB)

Code	D02	D07	D13	D23	D24	D25	D33	D34	D35	D36	D39
V (50/60 Hz)	24	48	110	220	230	240	380	400	415	440	480

Direct current (CWB9...80/CAWB)

Code	C03	C07	C09	C12	C13	C15
V _{DC}	24	48	60	110	125	220



Alternating current/direct current with electronic module (CWB9...125)

Code	E04	E64	E65	E66
V _{AC} (50/60 Hz) and V _{DC}	24...60 V	48...130 V	110...255 V	250...500 V

Reversing starters

CWB contactors + RW thermal overload relay

- Remote load handling
- Overload protection
- Phase-loss sensitive
- Trip class 10
- Temperature compensation
- DIN rail mounting by fixing the contactors
- Manual/local or automatic reset

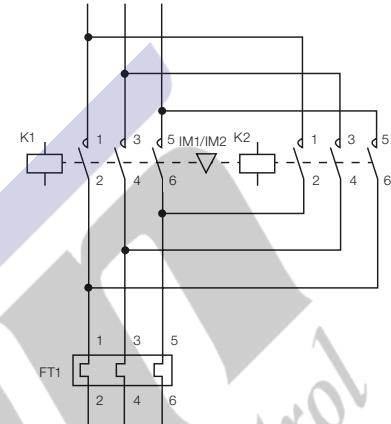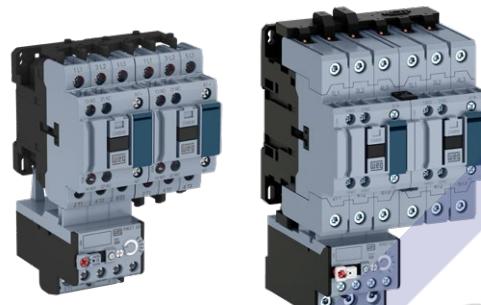

Motor current (A)	AC-3 contactor		Overload relay		Accessories		Fuse
	Reference	Maximum rated current AC-3 (A)	Reference	Current I adjustment range (A)	Mechanical interlock kit	Easy-connection busbar	
0.28...0.4	CWB9-11-30♦	9	RW27-2D3-D004	0.28...0.4			2
0.43...0.63	CWB9-11-30♦	9	RW27-2D3-C063	0.43...0.63			2
0.56...0.8	CWB9-11-30♦	9	RW27-2D3-D008	0.56...0.8			2
0.8...1.2	CWB9-11-30♦	9	RW27-2D3-D012	0.8...1.2			4
1.2...1.8	CWB9-11-30♦	9	RW27-2D3-D018	1.2...1.8			6
1.8...2.8	CWB9-11-30♦	9	RW27-2D3-D028	1.8...2.8			6
2.8...4	CWB9-11-30♦	9	RW27-2D3-U004	2.8...4			10
4...6.3	CWB9-11-30♦	9	RW27-2D3-D063	4...6.3			16
5.6...8	CWB9-11-30♦	9	RW27-2D3-U008	5.6...8			20
7...9	CWB12-11-30♦	12	RW27-2D3-U010	7...10			25
8...12	CWB25-11-30♦	25	RW27-2D3-D125	8...12.5			25
10...15	CWB25-11-30♦	25	RW27-2D3-U015	10...15			35
11...17	CWB25-11-30♦	25	RW27-2D3-U017	11...17			40
15...23	CWB25-11-30♦	25	RW27-2D3-U023	15...23			50
22...32	CWB32-11-30♦	32	RW27-2D3-U032	22...32			63
32...38	CWB38-11-30♦	38	RW27-2D3-U040	32...40			90
25...40	CWB40-11-30♦	40	RW67-5D3-U040	25...40			80
32...50	CWB50-11-30♦	50	RW67-5D3-U050	32...50			100
40...57	CWB65-11-30♦	65	RW67-5D3-U057	40...57			100
50...63	CWB65-11-30♦	65	RW67-5D3-U063	50...63			100
57...70	CWB80-11-30♦	80	RW67-5D3-U070	57...70			125
63...80	CWB80-11-30♦	80	RW67-5D3-U080	63...80			125
63...80	CWB95-11-30♦	95	RW117-3D3-U080	63...80			200
75...95	CWB95-11-30♦	95	RW117-3D3-U097	75...97			200
90...110	CWB110-11-30♦	110	RW117-3D3-U112	90...112			250
110...125	CWB125-11-30♦	125	RW117-3D3-U140	110...140			315

Notes: Reference values valid for operating voltages up to 440 V, altitude up to 2,000 m, ambient temperature range from -20 °C to +55 °C, and maximum switching frequency up to 15 operations/hour.

For other conditions, check the technical data of each part.

Replace “♦” by the appropriate coil voltage code.

Alternating current (CWB9...110/CAWB)

Code	D02	D07	D13	D23	D24	D25	D33	D34	D35	D36	D39
V (50/60 Hz)	24	48	110	220	230	240	380	400	415	440	480

Direct current (CWB9...80/CAWB)

Code	C03	C07	C09	C12	C13	C15
V _{DC}	24	48	60	110	125	220


Alternating current/direct current with electronic module (CWB9...125)

Code	E04	E64	E65	E66
V _{AC} (50/60 Hz) and V _{DC}	24...60 V	48...130 V	110...255 V	250...500 V

Reversing starters

CWB contactor + MPW manual motor protectors

- Remote load handling
- Overload protection
- Phase-loss sensitive
- Temperature compensation
- DIN rail mounting by fixing only one part¹⁾
- Manual/local or automatic reset
- Isolation and disconnection functions
- Protection against short-circuit
- High short-circuit interrupting capacity
- Short-circuit tripping device fixed at 13 x Iu



Note: 1) For reversing or star-delta starters, mount the contactors with screws.

Motor current (A)	AC-3 contactor		Motor-protective circuit breaker			Accessories		
	Reference	Maximum rated current AC-3 (A)	Reference	Current I adjustment range (A)	Instantaneous magnetic trip (Im) (A)	Conector	Easy-connection busbar	Mechanical interlock kit
0.1...0.16	CWB9-11-30◆	9	MPW18-3-C016	0.1...0.16	2.0	ECCMP-18B38 (CWB - AC Coil)	EC-R1	IM1
0.16...0.25	CWB9-11-30◆	9	MPW18-3-C025	0.16...0.25	3.2			
0.25...0.4	CWB9-11-30◆	9	MPW18-3-D004	0.25...0.4	5.2			
0.4...0.63	CWB9-11-30◆	9	MPW18-3-C063	0.4...0.63	8.1			
0.63...1	CWB9-11-30◆	9	MPW18-3-U001	0.63...1	13			
1...1.6	CWB9-11-30◆	9	MPW18-3-D016	1...1.6	20.8			
1.6...2.5	CWB9-11-30◆	9	MPW18-3-D025	1.6...2.5	32.5			
2.5...4	CWB9-11-30◆	9	MPW18-3-U004	2.5...4	52			
4...6.3	CWB9-11-30◆	9	MPW18-3-D063	4...6.3	81.9			
6.3...10	CWB12-11-30◆	12	MPW18-3-U010	6.3...10	130			
10...16	CWB18-11-30◆	18	MPW18-3-U016	10...16	208			
16...20	CWB25-11-30◆	25	MPW18-3-U020	16...20	260			
0.1...0.16	CWB9-11-30◆	9	MPW40-3-C016	0.1...0.16	2	ECCMP-40B38 (CWB - AC Coil) ECCMP-40B38DC (CWB - DC Coil)	EC-R1	IM1
0.16...0.25	CWB9-11-30◆	9	MPW40-3-C025	0.16...0.25	3.2			
0.25...0.4	CWB9-11-30◆	9	MPW40-3-D004	0.25...0.4	5.2			
0.4...0.63	CWB9-11-30◆	9	MPW40-3-C063	0.4...0.63	8.1			
0.63...1	CWB9-11-30◆	9	MPW40-3-U001	0.63...1	13			
1...1.6	CWB9-11-30◆	9	MPW40-3-D016	1...1.6	20.8			
1.6...2.5	CWB9-11-30◆	9	MPW40-3-D025	1.6...2.5	32.5			
2.5...4	CWB9-11-30◆	9	MPW40-3-U004	2.5...4	52			
20...25	CWB25-11-30◆	25	MPW40-3-U025	20...25	325			
25...32	CWB32-11-30◆	32	MPW40-3-U032	25...32	416			
32...38	CWB38-11-30◆	38	MPW40-3-U040	32...40	520			
32...40	CWB40-11-30◆	40	MPW80-3-U040	32...40	520	ECCMP-80B80 (CWB - AC and DC Coil)	EC-R2	IM2
40...50	CWB50-11-30◆	50	MPW80-3-U050	40...50	650			
50...65	CWB65-11-30◆	65	MPW80-3-U065	50...65	845			
65...80	CWB80-11-30◆	80	MPW80-3-U080	65...80	1,040			
70...90	CWB95-11-30◆	95	MPW100-3-U090	70...90	1,170			
80...95	CWB95-11-30◆	95	MPW100-3-U100	80...100	1,300	-	EC-R3	IM2
80...100	CWB110-11-30◆	110	MPW100-3-U100	80...100	1,300			

Notes: Reference values valid for operating voltages up to 440 V, altitude up to 2,000 m, ambient temperature range from -20 °C to +55 °C, and maximum switching frequency up to 15 operations/hour.

For other conditions, check the technical data of each part.

Replace “◆” by the appropriate coil voltage code.

Alternating current (CWB9...110/CAWB)

Code	D02	D07	D13	D23	D24	D25	D33	D34	D35	D36	D39
V (50/60 Hz)	24	48	110	220	230	240	380	400	415	440	480

Direct current (CWB9...80/CAWB)

Code	C03	C07	C09	C12	C13	C15
V _{DC}	24	48	60	110	125	220


Alternating current/direct current with electronic module (CWB9...125)

Code	E04	E64	E65	E66
V _{AC} (50/60 Hz) and V _{DC}	24...60 V	48...130 V	110...255 V	250...500 V

Star-delta starters

CWB contactors + RW thermal overload relay

- Remote load handling
- Overload protection
- Phase-loss sensitive
- Trip class 10
- Temperature compensation
- DIN rail mounting by fixing the contactors
- Manual/local or automatic reset

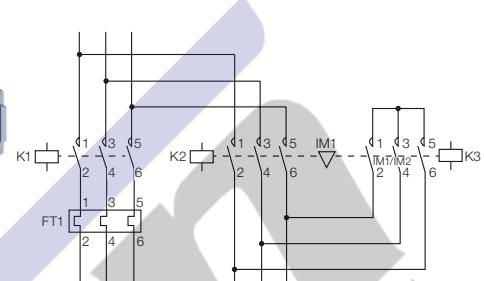

Motor current (A)	AC-3 contactor		Overload relay		Accessories			Fuse
	Contactor Δ (K1 and K2)	Contactor Y (K3)	Reference	Current I adjustment range (A)	Mechanical interlock kit	Easy-connection busbar	Timing relay Y-Δ	Maximum fuse (gL/gG) Coordination type 1
0.5...0.7	CWB9-11-30◆	CWB9-11-30◆	RW27-2D3-D004	0.28...0.4	IM1	EC-SD1	RTW17-G02	2
0.7...1.1	CWB9-11-30◆	CWB9-11-30◆	RW27-2D3-C063	0.4...0.63				2
1.1...1.4	CWB9-11-30◆	CWB9-11-30◆	RW27-2D3-D008	0.63...0.8				2
1.4...2.1	CWB9-11-30◆	CWB9-11-30◆	RW27-2D3-D012	0.8...1.2				4
2.1...3.1	CWB9-11-30◆	CWB9-11-30◆	RW27-2D3-D018	1.2...1.8				6
3.1...4.8	CWB9-11-30◆	CWB9-11-30◆	RW27-2D3-D028	1.8...2.8				6
4.8...6.9	CWB9-11-30◆	CWB9-11-30◆	RW27-2D3-U004	2.8...4				10
6.9...10.9	CWB9-11-30◆	CWB9-11-30◆	RW27-2D3-D063	4...6.3				16
9.6...13.8	CWB9-11-30◆	CWB9-11-30◆	RW27-2D3-U008	5.6...8				20
12.1...17.2	CWB12-11-30◆	CWB9-11-30◆	RW27-2D3-U010	7...10				25
13.8...21.6	CWB12-11-30◆	CWB9-11-30◆	RW27-2D3-D125	8...12.5				25
17.2...25.9	CWB18-11-30◆	CWB9-11-30◆	RW27-2D3-U015	10...15				35
19.9...29.3	CWB18-11-30◆	CWB12-11-30◆	RW27-2D3-U017	11...17				40
25.9...39.7	CWB25-11-30◆	CWB18-11-30◆	RW27-2D3-U023	15...23				50
37.9...55.2	CWB32-11-30◆	CWB25-11-30◆	RW27-2D3-U032	22...32				63
55.4...65.5	CWB38-11-30◆	CWB25-11-30◆	RW27-2D3-U040	32...40				90
43.1...69	CWB40-11-30◆	CWB40-11-30◆	RW67- 5D3 -U040	25...40	IM2	EC-SD2	RTW17-G02	80
55.4...86.2	CWB50-11-30◆	CWB40-11-30◆	RW67- 5D3 -U050	32...50				100
69...98.3	CWB65-11-30◆	CWB40-11-30◆	RW67- 5D3 -U057	40...57				100
86.2...108.6	CWB65-11-30◆	CWB40-11-30◆	RW67- 5D3 -U063	50...63				100
98.3...120	CWB80-11-30◆	CWB40-11-30◆	RW67- 5D3 -U070	57...70				125
109.1...138.4	CWB80-11-30◆	CWB50-11-30◆	RW67- 5D3 -U080	63...80	IM2	EC-SD3	RTW17-G02	125
109.1...138.5	CWB95-11-30◆	CWB95-11-30◆	RW117-3D3-U080	63...80				200
129.9...164.5	CWB95-11-30◆	CWB95-11-30◆	RW117-3D3-U097	75...97				200
155.8...190.5	CWB110-11-30◆	CWB95-11-30◆	RW117-3D3-U112	90...112				250
190.5...216.5	CWB125-11-30◆	CWB95-11-30◆	RW117-3D3-U140	110...140				315

Notes: Reference values valid for operating voltages up to 440 V, altitude up to 2,000 m, ambient temperature range from -20 °C to +55 °C, and maximum switching frequency up to 15 operations/hour.

For other conditions, check the technical data of each part.

The electronic timer is not shown in the figure.

Replace “◆” by the appropriate coil voltage code.

Alternating current (CWB9...110/CAWB)

Code	D02	D07	D13	D23	D24	D25	D33	D34	D35	D36	D39
V (50/60 Hz)	24	48	110	220	230	240	380	400	415	440	480

Direct current (CWB9...80/CAWB)

Code	C03	C07	C09	C12	C13	C15
Vdc	24	48	60	110	125	220


Alternating current/direct current with electronic module (CWB9...125)

Code	E04	E64	E65	E66
Vac (50/60 Hz) and Vdc	24...60 V	48...130 V	110...255 V	250...500 V

Star-delta starters

CWB contactors + MPW18 manual motor protectors

- Remote load handling
- Protection against overload
- Phase-loss sensitive
- Temperature compensation
- DIN rail mounting by fixing only one part¹⁾
- Manual/local reset
- Isolation and disconnection functions
- Protection against short-circuit
- High short-circuit interrupting capacity
- Short-circuit tripping device fixed at 13 x I_{lu}

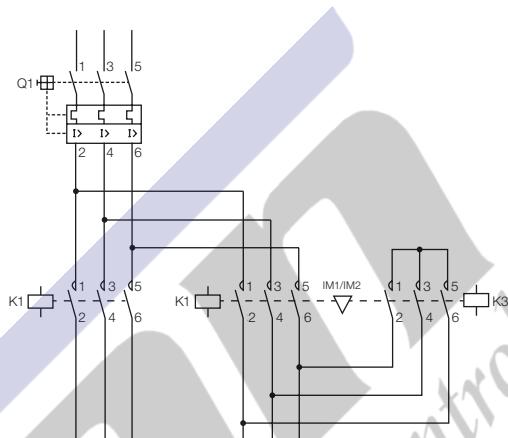

Note: 1) For reversing or star-delta starters, mount the contactors with screws.

Motor current (A)	AC-3 contactor		Motor-protective circuit breaker			Accessories			
	Contactor Δ (K1 and K2)	Contactor Y (K3)	Reference	Current I adjustment range (A)	Instantaneous magnetic trip I _m (A)	Connector	Mechanical interlock kit	Easy-connection busbar	Timing relay Y-Δ
0.1...0.16	CWB9-11-30◆	CWB9-11-30◆	MPW18-3-C016	0.1...0.16	2.0	ECCMP-18B38 (CWB - AC Coil)	IM1	EC-SD1	RTW17-G02
0.16...0.25	CWB9-11-30◆	CWB9-11-30◆	MPW18-3-C025	0.16...0.25	3.2				
0.25...0.4	CWB9-11-30◆	CWB9-11-30◆	MPW18-3-D004	0.25...0.4	5.2				
0.4...0.63	CWB9-11-30◆	CWB9-11-30◆	MPW18-3-C063	0.4...0.63	8.1				
0.63...1	CWB9-11-30◆	CWB9-11-30◆	MPW18-3-U001	0.63...1	13				
1...1.6	CWB9-11-30◆	CWB9-11-30◆	MPW18-3-D016	1...1.6	20.8				
1.6...2.5	CWB9-11-30◆	CWB9-11-30◆	MPW18-3-D025	1.6...2.5	32.5				
2.5...4	CWB9-11-30◆	CWB9-11-30◆	MPW18-3-U004	2.5...4	52				
4...6.3	CWB9-11-30◆	CWB9-11-30◆	MPW18-3-D063	4...6.3	81.9				
6.3...10	CWB9-11-30◆	CWB9-11-30◆	MPW18-3-U010	6.3...10	130				
10...16	CWB12-11-30◆	CWB9-11-30◆	MPW18-3-U016	10...16	208				
12...18	CWB12-11-30◆	CWB9-11-30◆	MPW18-3-U018	12...18	260				

Notes: Reference values valid for operating voltages up to 440 V, altitude up to 2,000 m, ambient temperature range from -20 °C to +55 °C, and maximum switching frequency up to 15 operations/hour. For other conditions, check the technical data of each part.

The electronic timer is not shown in the figure.


Replace “◆” by the appropriate coil voltage code.

Coil voltage codes	D02	D07	D13	D15	D17	D77	D23	D24	D25	D33	D34	D35	D36
V (50/60 Hz)	24	48	110	120	127	208	220	230	240	380	400	415	440

Star-delta starters

CWB contactors + MPW40/MPW80/MPW100 manual motor protectors

- Remote load handling
- Protection against overload
- Phase-loss sensitive
- Temperature compensation
- DIN rail mounting by fixing only one part¹⁾
- Manual/local or automatic reset
- Isolation and disconnection functions
- Protection against short-circuit
- High short-circuit interrupting capacity
- Short-circuit tripping device fixed at 13 x I_n

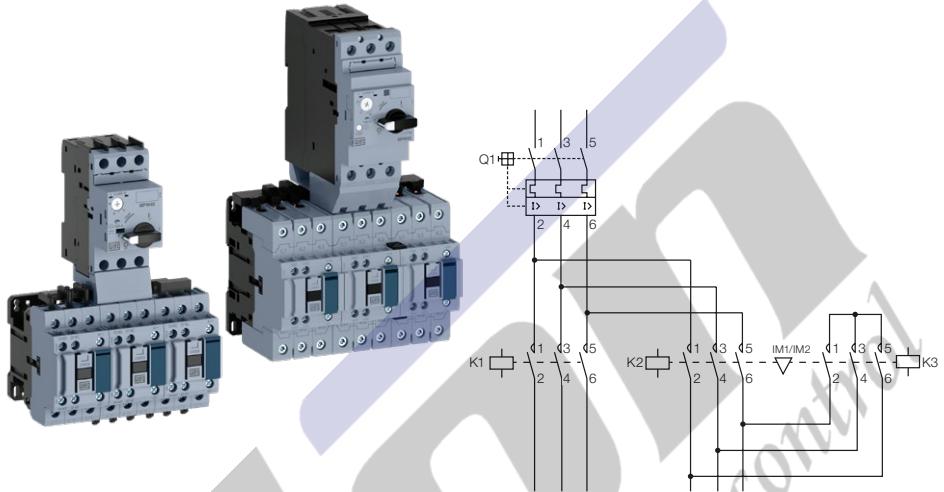

Note: 1) For reversing or star-delta starters, mount the contactors with screws.

Motor current (A)	AC-3 contactor		Motor-protective circuit breaker			Accessories			
	Contactor Δ (K1 and K2)	Contactor Y (K3)	Reference	Current I adjustment range (A)	Instantaneous magnetic trip I _m (A)	Connector	Mechanical interlock kit	Easy-connection busbar	Timing relay Y-Δ
0.1...0.16	CWB9-11-30◆	CWB9-11-30◆	MPW40-3-C016	0.1...0.16	2.0	ECCMP-40B38 (CWB - AC Coil) ECCMP-40B38DC (CWB - DC Coil)	IM1	EC-SD1	RTW17-G02
0.16...0.25	CWB9-11-30◆	CWB9-11-30◆	MPW40-3-C025	0.16...0.25	3.2				
0.25...0.4	CWB9-11-30◆	CWB9-11-30◆	MPW40-3-D004	0.25...0.4	5.2				
0.4...0.63	CWB9-11-30◆	CWB9-11-30◆	MPW40-3-C063	0.4...0.63	8.1				
0.63...1	CWB9-11-30◆	CWB9-11-30◆	MPW40-3-U001	0.63...1	13				
1...1.6	CWB9-11-30◆	CWB9-11-30◆	MPW40-3-D016	1...1.6	20.8				
1.6...2.5	CWB9-11-30◆	CWB9-11-30◆	MPW40-3-D025	1.6...2.5	32.5				
2.5...4	CWB9-11-30◆	CWB9-11-30◆	MPW40-3-U004	2.5...4	52				
4...6.3	CWB9-11-30◆	CWB9-11-30◆	MPW40-3-D063	4...6.3	81.9				
6.3...10	CWB9-11-30◆	CWB9-11-30◆	MPW40-3-U010	6.3...10	130				
10...16	CWB12-11-30◆	CWB9-11-30◆	MPW40-3-U016	10...16	208	ECCMP-80B80 (CWB - AC and DC Coil)	IM2	EC-SD2	
16...20	CWB12-11-30◆	CWB9-11-30◆	MPW40-3-U020	16...20	260				
20...25	CWB18-11-30◆	CWB9-11-30◆	MPW40-3-U025	20...25	325				
25...32	CWB25-11-30◆	CWB12-11-30◆	MPW40-3-U032	25...32	416				
32...40	CWB25-11-30◆	CWB18-11-30◆	MPW40-3-U040	32...40	520				
40...50	CWB32-11-30◆	CWB18-11-30◆	MPW80-3-U050	40...50	650				
50...65	CWB38-11-30◆	CWB25-11-30◆	MPW80-3-U065	50...65	845				
32...40	CWB40-11-30◆	CWB40-11-30◆	MPW80-3-U040	32...40	520				
40...50	CWB40-11-30◆	CWB40-11-30◆	MPW80-3-U050	40...50	650				
50...65	CWB40-11-30◆	CWB40-11-30◆	MPW80-3-U065	50...65	845				
65...80	CWB50-11-30◆	CWB40-11-30◆	MPW80-3-U080	65...80	1,040				
55...75	CWB50-11-30◆	CWB40-11-30◆	MPW100-3-U075	55...75	975				
80...95	CWB65-11-30◆	CWB40-11-30◆	MPW100-3-U090	70...90	1,170				
80...100	CWB65-11-30◆	CWB40-11-30◆	MPW100-3-U100	80...100	1,300				

Notes: Reference values valid for operating voltages up to 440 V, altitude up to 2,000 m, ambient temperature range from -20 °C to +55 °C, and maximum switching frequency up to 15 operations/hour.

For other conditions, check the technical data of each part.

The electronic timer is not shown in the figure.

Replace “◆” by the appropriate coil voltage code.

Coil voltage codes	D02	D07	D13	D15	D17	D77	D23	D24	D25	D33	D34	D35	D36
V (50/60 Hz)	24	48	110	120	127	208	220	230	240	380	400	415	440

Coil voltage codes	C03	C07	C09	C12	C13	C15
Vdc	24	48	60	110	125	220

Contactors for lighting circuits

Contactors for switching illumination circuits

Single-phase circuit

Total number of light bulbs shown in the next figure.


Three-phase circuit connected in delta

Total number of light bulbs shown in the next figure, multiplied by 1.73 and distributed in three equal quantities.


Three-phase circuit connected in star

Total number of light bulbs shown in the next figure, multiplied by 3 and distributed in three equal quantities.


Diagrams

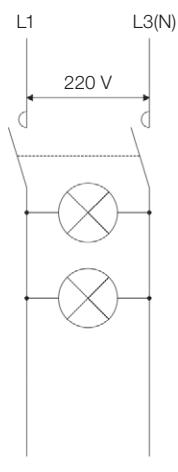

Single-phase circuit

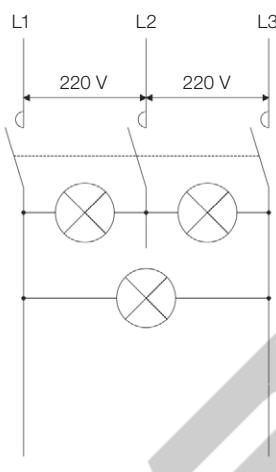

Three-phase circuit connected in delta

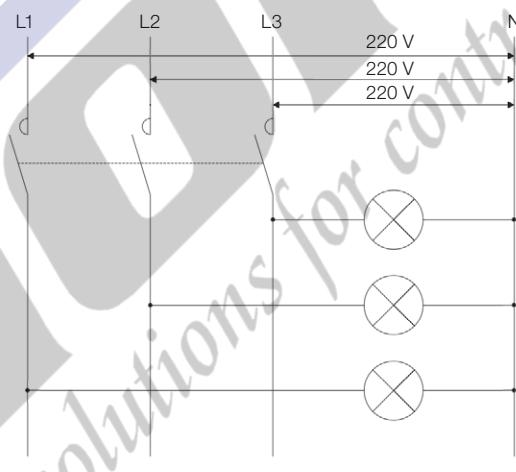

Three-phase circuit connected in star

Most common characteristics of the illumination systems

Incandescent light bulbs

High inrush current ($\approx 15 \times I_n$). Despite the short duration, it must be taken into account so that this current will not be greater than the making capacity of the contactor. Power factor is always 1.

Fluorescent lamps

Current slightly above the rated inrush current. Power factor is normally 0.5, and it can be improved up to 0.9 by using capacitors. In some cases, the connection of capacitors must be taken into consideration, as they may cause some damages to smaller contactors.

High-pressure mercury-vapor and metal-halide lamps

Inrush current varies according to the lamp type, around $1.6...2 \times I_n$ and it remains for 3 to 5 minutes. The power factor is around 0.6 and may be improved up to 1 by using capacitors. In some cases, the connection of capacitors must be taken into consideration, as they may cause some damages to smaller contactors.

High-pressure sodium lamps

Inrush current varies according to the lamp type, around $1.3...1.6 \times I_n$ and it remains for 3 to 5 minutes. The power factor is around 0.45 and may be improved up to 1 using capacitors. In some cases, the connection of capacitors must be taken into consideration, as they may cause some damages to smaller contactors.

Contactors for lighting circuits

Use of contactors in illumination circuits

Lamp type	W	A ²⁾	μF	Maximum number of lamps per phase at 220 V																
				CWB9	CWB12	CWB18	CWB25	CWB32	CWB38	CWB40	CWB50	CWB65	CWB80	CWB95	CWB110	CWB125				
Incandescent and halogen	60	0.27	-	56	56	67	101	118	135	148	185	241	296	352	407	463				
	100	0.45	-	33	33	40	60	71	81	89	111	144	178	211	244	278				
	150	0.68	-	22	22	26	40	47	53	59	74	96	118	140	162	184				
	200	0.91	-	16	16	19	29	35	40	44	55	71	88	104	121	137				
	300	1.4	-	10	10	12	19	22	26	29	36	46	54	68	79	89				
	500	2.3	-	6	6	7	11	13	15	17	22	28	35	41	48	54				
	750	3.4	-	4	4	5	8	9	10	12	15	19	24	28	32	37				
	1,000	4.6	-	3	3	3	5	6	7	9	11	14	17	21	24	27				
	AC-5b ¹⁾ (A)				15	15	18	28	32	36	40	50	65	80	95	110	125			
Fluorescent lamps with electronic starter																				
Single arrangement																				
Without compensation	20	0.39	-	41	41	53	66	89	112	115	144	187	230	273	316	359				
	40	0.45	-	35	35	46	57	77	97	100	124	162	199	236	274	311				
	65	0.7	-	22	22	30	37	50	62	64	80	104	128	152	176	200				
	80	0.8	-	20	20	26	32	43	55	56	70	91	112	133	154	175				
	110	1.2	-	13	13	17	21	29	36	37	47	61	75	89	103	117				
With parallel compensation	20	0.17	5	94	94	123	152	205	258	264	329	428	527	626	725	824				
	40	0.26	5	61	61	80	100	134	169	172	215	280	345	409	474	538				
	65	0.42	7	38	38	50	61	83	104	107	133	173	213	253	293	333				
	80	0.52	7	30	30	40	50	67	84	86	108	140	172	205	237	269				
	110	0.72	16	22	22	29	36	48	61	62	78	101	124	148	171	194				
Dual mounting																				
Without compensation	2x20	2x0.22	-	2x36	2x36	2x46	2x58	2x78	2x100	2x102	2x127	2x165	2x204	2x242	2x280	2x318				
	2x40	2x0.41	-	2x18	2x18	2x24	2x30	2x42	2x52	2x55	2x68	2x89	2x109	2x130	2x150	2x170				
	2x65	2x0.67	-	2x10	2x10	2x14	2x18	2x26	2x32	2x33	2x42	2x54	2x67	2x79	2x92	2x104				
	2x80	2x0.82	-	2x8	2x8	2x12	2x14	2x20	2x26	2x27	2x34	2x44	2x55	2x65	2x75	2x85				
	2x110	2x1.10	-	2x6	2x6	2x8	2x10	2x14	2x18	2x20	2x25	2x33	2x41	2x48	2x56	2x64				
With series compensation	2x20	2x0.13	-	2x60	2x60	2x80	2x100	2x134	2x168	2x172	2x215	2x280	2x345	2x409	2x474	2x538				
	2x40	2x0.24	-	2x32	2x32	2x42	2x54	2x72	2x90	2x93	2x117	2x152	2x187	2x222	2x257	2x292				
	2x65	2x0.39	-	2x20	2x20	2x26	2x32	2x44	2x56	2x57	2x72	2x93	2x115	2x136	2x158	2x179				
	2x80	2x0.48	-	2x16	2x16	2x20	2x26	2x36	2x44	2x47	2x58	2x76	2x93	2x111	2x128	2x146				
	2x110	2x0.65	-	2x12	2x12	2x16	2x20	2x26	2x32	2x34	2x43	2x56	2x69	2x82	2x95	2x108				
Fluorescent lamps without electronic starter																				
Single mounting																				
Without compensation	20	0.43	-	37	37	48	60	97	102	104	130	169	208	247	287	326				
	40	0.55	-	29	29	38	47	63	80	81	102	132	163	193	224	255				
	65	0.8	-	20	20	26	32	43	55	56	70	91	112	133	154	175				
	80	0.95	-	16	16	22	27	36	46	47	59	77	94	112	130	147				
	110	1.4	-	11	11	15	18	25	31	32	40	52	64	76	88	100				
With parallel compensation	20	0.19	5	84	84	110	136	184	231	236	295	383	472	560	648	737				
	40	0.29	5	55	55	72	89	101	151	154	193	251	309	367	425	483				
	65	0.46	7	34	34	45	56	76	95	97	122	158	195	231	268	304				
	80	0.57	7	28	28	36	45	61	77	79	98	128	157	187	216	246				
	110	0.79	16	20	20	26	32	44	55	57	71	92	113	135	156	177				
Dual mounting																				
Without compensation	2x20	2x0.25	-	2x32	2x32	2x42	2x52	2x70	2x88	2x90	2x112	2x146	2x179	2x213	2x246	2x280				
	2x40	2x0.47	-	2x16	2x16	2x22	2x26	2x36	2x46	2x48	2x60	2x77	2x95	2x113	2x131	2x149				
	2x65	2x0.76	-	2x10	2x10	2x12	2x16	2x22	2x28	2x29	2x37	2x48	2x59	2x70	2x81	2x92				
	2x80	2x0.93	-	2x8	2x8	2x10	2x12	2x18	2x22	2x24	2x30	2x39	2x48	2x57	2x66	2x75				
	2x110	2x1.3	-	2x6	2x6	2x8	2x10	2x12	2x16	2x17	2x22	2x28	2x34	2x41	2x47	2x54				
With parallel compensation	2x20	2x0.14	-	2x56	2x56	2x74	2x92	2x124	2x156	2x16	2x200	2x260	2x320	2x380	2x440	2x500				
	2x40	2x0.26	-	2x30	2x30	2x40	2x50	2x66	2x84	2x86	2x108	2x140	2x172	2x205	2x237	2x269				
	2x65	2x0.43	-	2x18	2x18	2x24	2x30	2x40	2x50	2x52	2x65	2x85	2x104	2x124	2x143	2x163				
	2x80	2x0.53	-	2x14	2x14	2x18	2x24	2x32	2x40	2x42	2x53	2x69	2x51	2x100	2x116	2x132				
	2x110	2x0.72	-	2x10	2x10	2x14	2x18	2x24	2x30	2x31	2x39	2x51	2x62	2x74	2x86	2x97				

Notes: 1) Orientative values. It is highly recommended to take into account the making capacity values and the AC-1 rated current values when sizing the contactor by the AC-5b utilization category (switching of incandescent lamps).

2) Rated current for each lamp at rated voltage.

Contactors for lighting circuits

Use of contactors in illumination circuits

Lamp type	W	A	μF	Maximum number of lamps per phase at 220 V													
				CWB9	CWB12	CWB18	CWB25	CWB32	CWB38	CWB40	CWB50	CWB65	CWB80	CWB95	CWB110	CWB125	
Low pressure sodium vapor																	
Without compensation	35	1.2	-	10	10	12	15	21	27	37	46	60	73	87	101	115	
	55	1.6	-	7	7	9	11	16	20	28	34	45	55	65	76	86	
	90	2.4	-	5	5	6	7	10	13	18	23	30	37	44	50	57	
	135	3.1	-	3	3	4	6	8	10	14	18	23	28	34	39	44	
	150	3.2	-	3	3	4	5	8	10	14	17	22	28	33	38	43	
	180	3.3	-	3	3	4	5	7	10	14	17	22	27	32	37	42	
	200	3.4	-	3	3	4	5	7	9	13	16	21	26	31	36	40	
With parallel compensation	35	0.3	17	40	40	50	63	86	110	149	187	243	299	355	411	467	
	55	0.4	17	30	30	37	47	65	82	112	140	182	224	266	308	350	
	90	0.6	25	-	-	25	31	43	55	75	93	121	149	177	205	233	
	135	0.9	36	-	-	-	21	28	36	50	62	81	100	118	137	156	
	150	1	36	-	-	-	19	26	33	45	56	73	90	106	123	140	
High pressure sodium vapor																	
Without compensation	150	1.9	-	6	6	7	10	13	17	21	26	34	42	50	58	66	
	250	3.2	-	3	3	4	5	8	10	13	16	20	25	30	34	39	
	400	5	-	2	2	3	3	5	6	8	10	13	16	19	22	25	
	700	8.8	-	1	1	1	2	2	3	5	6	7	9	11	13	14	
	1,000	12.4	-	-	-	1	1	2	2	3	4	5	6	8	9	10	
With parallel compensation	150	0.84	20	-	-	17	22	30	39	48	60	77	95	113	131	149	
	250	1.4	32	-	-	-	13	18	23	29	36	46	57	68	79	89	
	400	2.2	48	-	-	-	8	11	15	18	23	30	36	43	50	57	
	700	3.9	96	-	-	-	-	6	8	10	13	17	21	24	28	32	
	1,000	5.5	120	-	-	-	-	-	6	7	9	12	15	17	20	23	
High pressure mercury vapor																	
Without compensation	50	0.54	-	22	22	27	35	48	61	74	93	120	148	176	204	231	
	80	0.81	-	14	14	18	23	32	40	49	62	80	99	117	136	154	
	125	1.2	-	9	9	12	15	21	27	33	42	54	67	79	92	104	
	250	2.3	-	5	5	6	8	11	14	17	22	28	35	41	48	54	
	400	4.1	-	2	2	3	4	6	8	10	12	16	20	23	27	30	
	700	6.8	-	1	1	2	2	3	4	6	7	10	12	14	16	18	
	1,000	9.9	-	1	1	1	1	2	3	4	5	7	8	10	11	13	
With parallel compensation	50	0.3	10	40	40	50	63	86	110	133	167	217	267	317	367	417	
	80	0.45	10	26	26	33	42	57	73	89	111	144	178	211	244	278	
	125	0.67	10	17	17	22	28	38	49	60	75	97	119	142	164	187	
	250	1.3	18	9	9	11	14	20	25	31	38	50	62	73	85	96	
	400	2.3	25	-	-	6	8	11	14	17	22	28	35	41	48	54	
Metal iodide																	
Without compensation	250	2.5	-	4	4	6	7	10	12	16	20	26	32	38	44	50	
	400	3.6	-	3	3	4	5	7	8	11	14	18	22	26	31	35	
	1,000	9.5	-	1	1	1	2	2	3	4	5	7	8	10	12	13	
	2,000	20	-	-	-	-	-	1	1	2	3	3	4	5	6	6	
With parallel compensation	250	1.4	32	-	-	-	-	13	18	21	29	36	46	57	68	79	89
	400	2	32	-	-	-	-	9	13	15	20	25	33	40	48	55	63
	1,000	5.3	64	-	-	-	-	-	4	6	8	9	12	15	18	21	24
	2,000	11.2	140	-	-	-	-	-	-	-	4	4	6	7	8	10	11

Technical data

Use of contactors in direct current circuits¹⁾

Utilization category DC-1 (L/R <1ms)

Models		CWB9	CWB12	CWB18	CWB25	CWB32	CWB38	CWB40	CWB50	CWB65	CWB80	CWB95	CWB110	CWB125
U _e	Poles in series	Rated operational current I _e (A)												
≤24 V	1	20	20	25	40	50	50	60	90	110	110	140	150	175
	2	20	20	25	40	50	50	60	90	110	110	140	150	175
	3	20	20	25	40	50	50	60	90	110	110	140	150	175
	4	20	20	25	-	-	-	-	-	-	-	-	-	-
≤48 V	1	20	20	25	40	50	50	60	90	110	110	140	150	175
	2	20	20	25	40	50	50	60	90	110	110	140	150	175
	3	20	20	25	40	50	50	60	90	110	110	140	150	175
	4	20	20	25	-	-	-	-	-	-	-	-	-	-
≤60 V	1	20	20	25	40	50	50	60	90	110	110	140	150	175
	2	20	20	25	40	50	50	60	90	110	110	140	150	175
	3	20	20	25	40	50	50	60	90	110	110	140	150	175
	4	20	20	25	-	-	-	-	-	-	-	-	-	-
≤125 V	1	4	4	4	7	7	7	15	15	15	15	19	22	24
	2	20	20	25	40	50	50	60	90	110	110	140	150	175
	3	20	20	25	40	50	50	60	90	110	110	140	150	175
	4	20	20	25	-	-	-	-	-	-	-	-	-	-
≤220 V	1	1	1	1	1	1	1	2	2	2	2	2.5	2.9	3.2
	2	4	4	4	7	7	7	10	10	10	10	13	15	16
	3	20	20	25	32	32	32	50	50	50	50	64	73	80
	4	20	20	25	-	-	-	-	-	-	-	-	-	-
≤440 V	1	0.4	0.4	0.4	0.4	0.5	0.5	1	1	1	1	1.3	1.5	1.6
	2	1	1	1	1	1	1	2	2	2	2	2.5	2.9	3.2
	3	4	4	4	7	7	7	10	10	10	10	13	15	16
	4	4	4	4	-	-	-	-	-	-	-	-	-	-
≤600 V	1	-	-	-	-	-	-	-	-	-	-	-	-	-
	2	0.4	0.4	0.4	0.4	0.5	0.5	1	1	1	1	1.3	1.5	1.6
	3	1	1	1	1	1	1	2	2	2	2	2.5	2.9	3.2
	4	4	4	4	-	-	-	-	-	-	-	-	-	-

Utilization category DC-3 (L/R <2.5ms)

Models		CWB9	CWB12	CWB18	CWB25	CWB32	CWB38	CWB40	CWB50	CWB65	CWB80	CWB95	CWB110	CWB125
U _e	Poles in series	Rated operational current I _e (A)												
≤24 V	1	18	18	22	36	45	45	55	80	100	100	127	145	159
	2	18	18	22	36	45	45	55	80	100	100	127	145	159
	3	18	18	22	36	45	45	55	80	100	100	127	145	159
	4	18	18	22	-	-	-	-	-	-	-	-	-	-
≤48 V	1	18	18	22	36	45	45	55	80	100	100	127	145	159
	2	18	18	22	36	45	45	55	80	100	100	127	145	159
	3	18	18	22	36	45	45	55	80	100	100	127	145	159
	4	18	18	22	-	-	-	-	-	-	-	-	-	-
≤60 V	1	18	18	22	36	45	45	55	80	100	100	127	145	159
	2	18	18	22	36	45	45	55	80	100	100	127	145	159
	3	18	18	22	36	45	45	55	80	100	100	127	145	159
	4	18	18	22	-	-	-	-	-	-	-	-	-	-
≤125 V	1	2	2	2	3	3	3	5	5	5	5	6.4	7.3	8.0
	2	14.4	14.4	17.6	28.8	36	36	44	64	80	80	102	116	127
	3	18	18	22	36	45	45	55	80	100	100	127	145	159
	4	18	18	22	-	-	-	-	-	-	-	-	-	-
≤220 V	1	0.5	0.5	0.5	0.5	0.5	0.5	1	1	1	1	1.3	1.5	1.6
	2	2	2	2	3	3	3	5	5	5	5	6.4	7.3	8.0
	3	18	18	22	28	28	28	45	45	45	45	57	65	72
	4	18	18	22	-	-	-	-	-	-	-	-	-	-
≤440 V	1	-	-	-	-	-	-	-	-	-	-	-	-	-
	2	0.3	0.3	0.3	0.5	0.5	0.5	1	1	1	1	1.3	1.5	1.6
	3	1.5	1.5	1.5	1.5	3	3	5	5	5	5	6.4	7.3	8.0
	4	3.6	3.6	3.6	-	-	-	-	-	-	-	-	-	-
≤600 V	1	-	-	-	-	-	-	-	-	-	-	-	-	-
	2	-	-	-	-	-	-	-	-	-	-	-	-	-
	3	0.5	0.5	0.5	0.5	0.5	0.5	1	1	1	1	1.3	1.5	1.6
	4	1	2.5	2.5	-	-	-	-	-	-	-	-	-	-

Note: 1) Operating duty according to IEC/EN 60947-4-1:

DC-1 (non-inductive or slightly inductive loads, resistive furnaces);

DC-3 (shunt-motors: starting, plugging and inching. Dynamic braking of DC motors);

DC-5 (series-motors: starting, plugging and inching. Dynamic braking of DC motors).

Technical data


Use of contactors in direct current circuits¹⁾

Utilization category DC-5 (L/R <15ms)


Models		CWB9	CWB12	CWB18	CWB25	CWB32	CWB38	CWB40	CWB50	CWB65	CWB80	CWB95	CWB110	CWB125
U_e	Poles in series	Rated operational current I_o (A)												
$\leq 24\text{ V}$	1	18	18	22	36	45	45	55	80	100	100	127	145	159
	2	18	18	22	36	45	45	55	80	100	100	127	145	159
	3	18	18	22	36	45	45	55	80	100	100	127	145	159
	4	18	18	22	-	-	-	-	-	-	-	-	-	-
$\leq 48\text{ V}$	1	18	18	22	36	45	45	55	80	100	100	127	145	159
	2	18	18	22	36	45	45	55	80	100	100	127	145	159
	3	18	18	22	36	45	45	55	80	100	100	127	145	159
	4	18	18	22	-	-	-	-	-	-	-	-	-	-
$\leq 60\text{ V}$	1	18	18	22	36	45	45	55	80	100	100	127	145	159
	2	18	18	22	36	45	45	55	80	100	100	127	145	159
	3	18	18	22	36	45	45	55	80	100	100	127	145	159
	4	18	18	22	-	-	-	-	-	-	-	-	-	-
$\leq 125\text{ V}$	1	2	2	2	3	3	3	5	5	5	5	6	7	8
	2	14.4	14.4	17.6	28.8	36	36	44	64	80	80	102	116	127
	3	18	18	22	36	45	45	55	80	100	100	127	145	159
	4	18	18	22	-	-	-	-	-	-	-	-	-	-
$\leq 220\text{ V}$	1	-	-	-	-	-	-	-	-	-	-	-	-	-
	2	1.6	1.6	1.6	2.4	2.4	2.4	4	4	4	4	5.1	5.8	6.4
	3	16.2	16.2	19.8	25.2	25.2	25.2	40.5	40.5	40.5	40.5	52	59	64
	4	16	16	20	-	-	-	-	-	-	-	-	-	-
$\leq 440\text{ V}$	1	-	-	-	-	-	-	-	-	-	-	-	-	-
	2	-	-	-	-	-	-	-	-	-	-	-	-	-
	3	0.9	0.9	0.9	0.9	1.8	1.8	3	3	3	3	3.8	4.4	4.8
	4	0.9	0.9	0.9	-	-	-	-	-	-	-	-	-	-
$\leq 600\text{ V}$	1	-	-	-	-	-	-	-	-	-	-	-	-	-
	2	-	-	-	-	-	-	-	-	-	-	-	-	-
	3	-	-	-	-	-	-	-	-	-	-	-	-	-
	4	-	-	-	-	-	-	-	-	-	-	-	-	-

Wiring diagrams


1 pole in series




3 poles in series

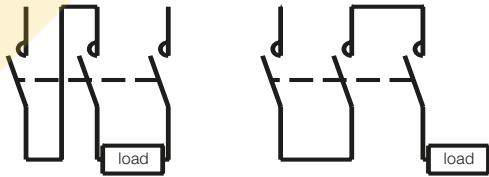

2 poles in series

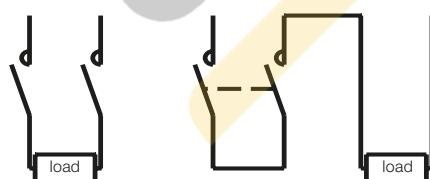

4 poles in series

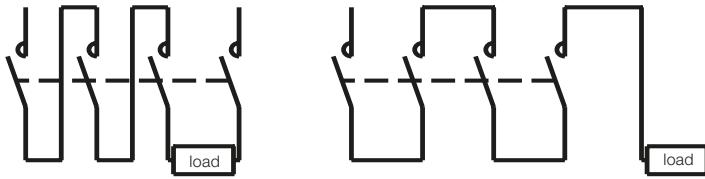

Note: 1) Operating duty according to IEC/EN 60947-4-1:

DC-1 (non-inductive or slightly inductive loads, resistive furnaces);

DC-3 (shunt-motors: starting, plugging and inching. Dynamic braking of DC motors);

DC-5 (series-motors: starting, plugging and inching. Dynamic braking of DC motors).









Technical data

Terminal markings according to IEC/EN 60947

Diagram	Configuration	Auxiliary contacts		Reference
		NO	NC	
3-poles contactors with built-in auxiliary contacts				
	11	1	1	CWB9...125 A
	11	1	1	CWBxx.11.30◆
	11	1	1	CWBxx.11.40◆
	11	1	1	CWBxx.11.22◆
	11	1	1	CWBxx.11.04◆
Auxiliary contactors				
	14	1	4	CAWB-14-00◆
	23	2	3	CAWB-23-00◆
	32	3	2	CAWB-32-00◆
	41	4	1	CAWB-41-00◆
Front mounted auxiliary contact blocks				
	20	2	0	BFB-20
	11	1	1	BFB-11
	02	0	2	BFB-02
	40	4	0	BFB-40
	22	2	2	BFB-22
	22	2	2	BFB-22 EL
	04	0	4	BFB-04

Technical data

Terminal markings according to IEC/EN 60947

Diagram	Configuration	Auxiliary contacts		Reference
		NO	NC	
Front mounted auxiliary contact blocks				
	31	3	1	BFB-31
	13	1	3	BFB-13
Side mounted auxiliary contact blocks				
	11	1	1	BLB-11
	20	2	0	BLB-20
	02	0	2	BLB-02
	11	1	1	BLRB-11
	20	2	0	BLRB-20
	02	0	2	BLRB-02

Terminal markings according to EN 50012

Diagram	Configuration	Auxiliary contacts		Reference
		NO	NC	
Front mounting auxiliary contact blocks				
	20	2	0	BFB-20 EN
	11	1	1	BFB-11 EN
	02	0	2	BFB-02 EN
	40	4	0	BFB-40 EN
	22	2	2	BFB-22 EN
	04	0	4	BFB-04 EN
	31	3	1	BFB-31EN
	13	1	3	BFB-13 EN

Technical data

Basic data

Models	CWB	CWB9	CWB12	CWB18	CWB25	CWB32	CWB38
Compliance with the standards	IEC/EN 60947-1 IEC/EN 60947-4-1 IEC/EN 60947-5-1 UL 60947						
Rated insulation voltage U_i (pollution degree 3)	IEC/EN 60947-4-1 (V) UL, CSA (V)			690			
Rated impulse-withstand voltage U_{imp}	IEC/EN 60947-1 (kV)			6			
Frequency limits				25...400			
Mechanical lifespan	AC coil (million cycles)			10			
	DC coil (million cycles)			10			
Electrical lifespan	I_e AC-3 (million cycles)	-	2.0	2.0	1.8	1.6	1.2
Degree of protection (IEC/EN 60529)	Main terminals Coil and auxiliary contacts				IP10 (front) IP20 (front)		
Mounting					By screws or DIN 35 mm rail (EN 50022)		
Coil connection points	Contactors with AC coil Contactors with DC coil				2		
Vibration resistance (IEC/EN 60068-2-6)	Open contactor (g) Closed contactor (g)				4 4		
Resistance to mechanical shocks (½ senoid = 11ms - IEC/EN 60068-2-27)	Open contactor (g) Closed contactor (g)				10 15		
Ambient temperature	Operating Storage				-25 °C...+55 °C -55 °C...+80 °C		
Maximum operation altitude without modification in the rated values ¹⁾					3,000 m		

Models	CWB40	CWB50	CWB65	CWB80	CWB95	CWB110	CWB125
Compliance with the standards	IEC/EN 60947-1 IEC/EN 60947-4-1 IEC/EN 60947-5-1 UL 60947						
Rated insulation voltage U_i (pollution degree 3)	IEC/EN 60947-4-1 (V) UL, CSA (V)			1,000			
Rated impulse-withstand voltage U_{imp}	IEC/EN 60947-1 (kV)			6			
Frequency limits				25...400			
Mechanical lifespan	AC coil (million cycles)			6			
	DC coil (million cycles)			6			
Electrical lifespan	I_e AC-3 (million cycles)	1.6	1.6	1.6	1.2	1.1	1.0
Degree of protection (IEC/EN 60529)	Main terminals Coil and auxiliary contacts				IP10 (front) IP20 (front)		
Mounting					By screws or DIN 35 mm rail (EN 50022)		
Coil connection points	Contactors with AC coil Contactors with DC coil				2		
Vibration resistance (IEC/EN 60068-2-6)	Open contactor (g) Closed contactor (g)				4 4		
Resistance to mechanical shocks (½ senoid = 11ms - IEC/EN 60068-2-27)	Open contactor (g) Closed contactor (g)				10 15		
Ambient temperature	Operating Storage				-25 °C...+55 °C -55 °C...+80 °C		
Maximum operation altitude without modification in the rated values ¹⁾					3,000 m		

Note: 1) For altitudes of 3,000...4,000 m (0.90x I_e and 0.80x U_i) and of 4,000...5,000 m (0.80x I_e and 0.75x U_i).

Technical data

Control circuit - alternating current (AC)

Models		CWB9...38, CAWB	CWB40...80	CWB95/110
Rated insulation voltage U_i (pollution degree 3)	IEC/EN 60947-4-1 UL, CSA	690 600	1,000 600	1,000 600
Standard voltages at 50/60 Hz	(V)	12...500	24...500	24...500
Coil operating limits	At 50 Hz At 60 Hz	(xUs) (xUs)	0.8...1.1 0.8...1.1	0.8...1.1 0.8...1.1
Average consumption Coil 50/60 Hz (60 Hz operation)	Magnetic circuit closed Power factor switched on Thermal power dissipation Closing of the magnetic circuit	(VA) (cos φ) (W) (VA)	7.5 0.27 1.5...2.5 75	17.5 0.28 4...5.5 185
Average consumption Coil 50/60 Hz (50 Hz operation)	Magnetic circuit closed Power factor switched on Thermal power dissipation Closing of the magnetic circuit	(VA) (cos φ) (W) (VA)	9 0.24 1.5...2.5 90	27 0.25 5.5...7.8 202
Average operating time	Power factor switching on Closing of the NO contacts Opening of the NO contacts	(cos φ) (ms) (ms)	0.7 15...25 8...12	0.55 10...15 8...12
				0.48 0.5 4.8

Control circuit - direct current (DC)

Models		CWB9...38, CAWB	CWB40...80	CWB95...125
Rated insulation voltage U_i (pollution degree 3)	IEC/EN 60947-4-1 UL, CSA	690 600	1,000 600	- -
Standard voltages	(V)	12...500	12...500	-
Coil operationg limits	(xUs)	0.8...1.1	0.8...1.1	-
Average consumption DC coil	Magnetic circuit closed Closing of the magnetic circuit	(W) (W)	5.8 5.8	10.6 105.5
Average operating time	Closing of the NO contacts Opening of the NO contacts	(ms) (ms)	35...45 8...12	20...30 4.8

Control circuit - electronic coils (AC/DC)

Models		CWB9...38, CAWB	CWB40...80	CWB95...125
Rated insulation voltage U_i (pollution degree 3)	IEC 60947-4-1, VDE 0660 UL, CSA	690 600	1,000 600	1,000 600
Standard voltages	(V)	24...500	24...500	24...500
Coil operationg limits	at V_{dc} at 50 Hz at 60 Hz	(xUs) (xUs) (xUs)	0.8...1.1 0.8...1.1 0.8...1.1	0.8...1.1 0.8...1.1 0.8...1.1
Average consumption			1.0 x Us and cold coil	
AC power supply (60 Hz)	Magnetic circuit closed Power factor Thermal power dissipation Closing of the magnetic circuit Power factor	(VA) (cos φ) (W) (VA) (cos φ)	4.3 0.65 2.8 19.5 0.92	5.6 0.7 3.9 30 0.92
DC power supply	Magnetic circuit closed Closing of the magnetic circuit	(W) (W)	1...2 10...12	2.4...4.8 19...21
Average operating time	Closing of the NO contacts Opening of the NO contacts	(ms) (ms)	35...60 35...60	55...80 17...37
				32...48 30...55

Technical data

Basic data

Models	CWB150	CWB180	CWB225
Compliance with the standards	IEC/EN 60947-1 IEC/EN 60947-4-1 IEC/EN 60947-5-1 UL 60947		
Rated insulation voltage U_i (pollution degree 3)	IEC/EN 60947-4-1 (V) UL, CSA (V)	1,000 600	
Rated impulse-withstand voltage U_{imp}	IEC/EN 60947-1 (kV)	8	
Frequency limits	(Hz)	25...400	
Mechanical lifespan	AC/DC coil (million cycless)		4
Electrical lifespan	I_e AC-3 (million cycless)	0.6	0.6
Degree of protection (IEC/EN 60529)	Main terminals Coil and auxiliary contacts		IP00 IP20
Mounting		By screws	
Coil connection points	Contactors with AC/DC coil		2
Vibration resistance (IEC/EN 60068-2-6)	Open contactor (g) Closed contactor (g)	4 4	
Resistance to mechanical shocks (½ senoide = 11ms - IEC/EN 60068-2-27)	Open contactor (g) Closed contactor (g)	10 15	
Ambient temperature	Operating Storage	-25 °C...+55 °C ¹⁾ -55 °C...+80 °C	
Maximum operation altitude without modification in the rated values ²⁾		3,000 m	

Notes: 1) For temperatures above 50 °C it is necessary to keep the minimum lateral distance of 10 mm to other components.

2) For altitudes of 3,000...4,000 m (0.90x I_e and 0.80x U_i) and of 4,000...5,000 m (0.80x I_e and 0.75x U_i).

Control circuit - electronic coils (AC/DC)

Models	CWB150...225
Standard voltages (Hz)	24...500
at V_{dc} (x U_s)	0.8...1.1
Coil operating limits	0.8...1.1
at 50 Hz (x U_s)	0.8...1.1
at 60 Hz (x U_s)	0.8...1.1
Average consumption	1.0 x U_s and cold coil
AC power supply (60 Hz)	7.9 0.52 4.1 158 0.58 4.1 91.9
DC power supply	Magnetic circuit closed (VA) Power factor ($\cos \varphi$) Thermal power dissipation (W) Closing of the magnetic circuit (VA) Power factor ($\cos \varphi$) Magnetic circuit closed (W) Closing of the magnetic circuit (W)

Technical data

Main contacts

Models	CWB9	CWB12	CWB18	CWB25	CWB32	CWB38	CWB40	CWB50	CWB65	CWB80	CWB95	CWB110	CWB125	
Rated operational current I _e	AC-3 (U _e ≤ 440 V) (A)	9	12	18	25	32	38	40	50	65	80	95	110	125
	AC-4 (U _e ≤ 440 V) (A)	4.4	5.8	8.5	10.4	13.7	13.7	18.5	18.5	26	32	52	58	65
	AC-1 (θ ≤ 55 °C, U _e ≤ 690 V) (A)	25	25	32	40	50	50	60	90	110	110	140	150	175
Rated operational voltage U _e	IEC/EN 60947-4-1 (V)	690						1,000						
	UL, CSA (V)	600						1,000						
Conventional thermal current I _{th} (θ ≤ 55 °C)	(A)	25	25	32	40	50	50	60	90	110	110	140	150	175
Making capacity - IEC/EN 60947	(A)	250	250	300	450	550	550	550	1,000	1,000	1,000	1,100	1,200	1,375
Breaking capacity IEC/EN 60947	(U _e ≤ 400 V) (A)	250	250	300	450	550	550	550	1,000	1,000	1,000	1,100	1,200	1,375
	(U _e = 500 V) (A)	220	220	250	350	450	450	480	880	880	880	970	1,000	1,200
	(U _e = 690 V) (A)	150	150	180	250	350	350	350	640	640	640	700	765	870
Acceptable short-time current (no current flowing during recovery time of 15min and θ ≤ 40 °C)	1s (A)	210	210	240	380	400	430	720	820	900	900	1,200	1,350	1,430
	10s (A)	105	105	145	240	260	310	320	400	520	640	720	780	860
	1min (A)	60	60	80	120	130	150	165	230	340	360	410	470	515
	10min (A)	30	30	40	50	60	60	85	110	130	130	140	150	175
Short-circuit protection of the main contacts @600 V - UL/CSA	(kA)	5						10						
Coordination type 1	(A)	25	40	50	63	63	63	80	100	125	160	224	250	315
	(A)	20	20	25	35	50	50	63	80	100	125	160	160	200
Fuse (gL/gG)	(mΩ)	2.5	2.5	2.5	2	2	2	1.6	1.6	1.6	1.6	0.7	0.7	0.7
Impedance per pole	(mΩ)	2.5	2.5	2.5	2	2	2	1.6	1.6	1.6	1.6	0.7	0.7	0.7
	(W)	1.5	1.5	2.5	3.2	5	5	6	13	19	19	15	17	21
Average power dissipation per pole	(W)	AC-1	1.5	1.5	2.5	3.2	5	5	6	13	19	19	15	17
AC-3	(W)	0.2	0.4	0.8	1.2	2	3	3	4	7	10	7	9	11
Minimum switching capacity ¹⁾	(V/mA)	50/100												
Utilization category AC-3														
Rated operational current I _e (θ ≤ 55 °C)	U _e ≤ 440 V (A)	9	12	18	25	32	38	40	50	65	80	95	110	125
	U _e ≤ 500 V (A)	9	12	15.8	23	28.5	28.5	35	45	55	75	84	97	110
	U _e ≤ 690 V (A)	7	9	12.8	16.5	21	21	32	35	40	50	61	70	80
Orientative rated operational power Three-phase induction motors (50/60 Hz) IV poles - 1,800 rpm	220/240 V (kW)	2.2	3	4.5	6.5	7.5	9.2	11	15	18.5	22	22	30	37
	(cv)	3	4	6	8.7	10	12.5	15	20	25	29	30	40	50
	380/400 V (kW)	4	5.5	7.5	12.5	15	18.5	18.5	22	30	37	45	55	55
	(cv)	5.5	7.5	10	16.8	20	25	25	29	40	50	60	75	75
	415/440 V (kW)	4.5	6.5	9.2	12.5	15	18.5	22	30	37	45	55	55	75
	(cv)	6	8.7	12.5	16.8	20	25	29	40	50	60	75	75	100
	500 V (kW)	5.5	7.5	10	15	18.5	18.5	22	30	37	55	55	55	75
	(cv)	7.5	10	13.4	20	25	25	29	40	50	74	75	75	100
	660/690 V (kW)	5.5	7.5	11	15	18.5	18.5	30	33	37	45	55	55	75
	(cv)	7.5	10	15	20	25	25	40	44	50	60	75	75	100
Maximum percentage	600 ops./h (%)	100	100	100	100	100	100	100	100	100	100	100	100	100
Utilization category AC-4														
Rated operational current I _e	(U _e ≤ 440 V) (A)	4.4	5.8	8.5	10.4	14	14	18.5	21	27	40	52	58	65
	(U _e ≤ 500 V) (A)	3.9	5.1	8	12	13.5	13.5	17.5	17.6	23	33	46	51	57
	(U _e ≤ 690 V) (A)	2.8	3.7	5.4	12	12.8	12.8	14	17	22	26	33	37	41
Orientative rated operational power Three-phase induction motors (50/60 Hz) IV poles - 1,800 rpm (200,000 operations)	220/240 V (kW)	1.5	1.5	2.2	3	4	4	4.5	5.5	7.5	11	15	16.5	18.5
	(cv)	2	2	3	4	5.4	5.4	6	7.4	10	14.7	20	22	25
	380/400 V (kW)	2.2	3.7	4	5.5	7.5	7.5	9.2	11	15	18.5	22	28	30
	(cv)	3	5	5.4	7.4	10	10	12.3	14.7	20.1	24.8	30	38	40
	415/440 V (kW)	2.2	3	3.7	5.5	7.5	7.5	11	11	15	22	30	33	37
	(cv)	3	4	5	7.4	10	10	14.7	14.7	20.1	30	40	44	50
	500 V (kW)	2.2	3	5	7.5	9	9	11	15	18.5	22	30	30	37
	(cv)	3	4	6.7	10	12	12	14.7	20.1	25	30	40	40	50
	660/690 V (kW)	2.2	3	5	10	11	11	12.5	15	20	25	30	30	45
	(cv)	3	4	6.7	13.4	14.7	14.7	16.8	20.1	26.8	33.5	40	40	60

Note: 1) In order to achieve acceptable reliability for application and/or continuity test on the power contacts, a minimum voltage and current of 50 V and 100 mA, respectively, must be used. For lower values, the auxiliary contacts must be used.

Technical data

Main contacts

Models	CWB150	CWB180	CWB225	
Rated operational current I_e	AC-3 ($U_e \leq 440$ V) (A)	150	180	225
	AC-4 ($U_e \leq 440$ V) (A)	77	96	96
	AC-1 ($\theta \leq 55$ °C, $U_e \leq 690$ V) (A)	225	275	320
Rated operational voltage U_e	IEC/EN 60947-4-1 (V)	1,000		
	UL, CSA (V)	600		
Conventional thermal current I_{th} ($\theta \leq 55$ °C) (A)	225	275	320	
Making capacity - IEC/EN 60947 (A)	1,500	1,800	2,250	
Breaking capacity IEC/EN 60947 ($U_e \leq 400$ V) (A)	1,200	1,440	1,800	
Acceptable short-time current (no current flowing during recovery time of 15min and $\theta \leq 40$ °C)	10s (A)	1,200	1,440	1,800
	30s (A)	700	830	1,040
	60s (A)	490	590	735
	180s (A)	280	340	425
Recovery time (without current) (min)	15	15	15	
Short-circuit breaking capacity (kA)		10		
Short-circuit protection of the main contacts - Fuse (gL/gG)	Coordination type 1 (A)	355	355	355
	Coordination type 2 (A)	250	250	250
Impedance per pole (mΩ)	-	-	-	
Average power dissipation per pole	AC-1 (W)	-	-	
	AC-3 (W)	-	-	
Utilization category AC-3				
Rated operational current I_e ($\theta \leq 55$ °C)	$U_e \leq 440$ V (A)	150	180	225
	$U_e \leq 500$ V (A)	130	155	185
	$U_e \leq 690$ V (A)	80	95	135
	$U_e \leq 1,000$ V (A)	55	80	95
Orientative rated operational power Three-phase induction motors (50/60 Hz) IV poles - 1,800 rpm	220/240 V (kW)	45	55	55
	(cv)	60	75	75
	380/400 V (kW)	75	90	110
	(cv)	100	125	150
	415/440 V (kW)	90	110	132
	(cv)	125	150	175
	500 V (kW)	90	110	132
	(cv)	125	150	175
	660/690 V (kW)	75	90	132
	(cv)	100	125	175
	Maximum percentage 600 ops./h (%)	100	100	100
Fail rates for electrical endurance - AC-3 category (IEC 60947-4-1 appendix K)				
Number of cycles (x 10 ⁶)	B10	-	-	-
	B10d	-	-	-
Utilization category AC-4				
Rated operational current I_e ($\theta \leq 55$ °C)	$U_e \leq 440$ V (A)	77	96	96
	$U_e \leq 500$ V (A)	64	78	78
	$U_e \leq 690$ V (A)	47	77	77
	$U_e \leq 1,000$ V (A)	27	27	32
Orientative rated operational power Three-phase induction motors (50/60 Hz) IV poles - 1,800 rpm	220/240 V (kW)	22	22	30
	(cv)	30	30	40
	380/400 V (kW)	30	37	45
	(cv)	40	50	60
	415/440 V (kW)	45	55	55
	(cv)	60	75	75
	500 V (kW)	45	55	55
	(cv)	60	75	75
	660/690 V (kW)	45	75	75
	(cv)	60	100	100

Technical data

Main contacts

Models	CWB9	CWB12	CWB18	CWB25	CWB32	CWB38	CWB40	CWB50	CWB65	CWB80	CWB95	CWB110	CWB125	
Utilization category AC-1														
	3P and 4P (NO)													
Conventional thermal current I_{th}	$\theta \leq 55^{\circ}\text{C}$ (A)	25	25	32	40	50	50	60	90	110	110	140	150	175
	$\theta \leq 65^{\circ}\text{C}$ (A)	20	20	26	32	40	40	48	72	88	88	112	121	140
	$\theta \leq 75^{\circ}\text{C}$ (A)	18	18	22	28	35	35	42	63	77	77	98	106	123
Maximum orientative operational current according to the ambient temperature	$0 \leq 55^{\circ}\text{C} (U_e \leq 690\text{ V})$ (A)	25	25	32	40	50	50	60	90	110	110	140	150	175
Max. operational power $\theta \leq 55^{\circ}\text{C}$ (three-phase resistors)	240 V (kW)	10.4	10.4	13.3	16.6	20.8	20.8	24.9	37.4	45.7	45.7	58.2	62.4	72.7
	400 V (kW)	17.3	17.3	22.2	27.7	34.6	34.6	41.6	62.4	76.2	76.2	97.0	103.9	121.2
	440 V (kW)	19.1	19.1	24.4	30.5	38.1	38.1	45.7	68.6	83.8	83.8	106.7	114.3	133.4
	500 V (kW)	21.7	21.7	27.7	34.6	43.3	43.3	52.0	77.9	95.3	95.3	121.2	129.9	151.6
	690 V (kW)	29.9	29.9	38.2	47.8	59.8	59.8	71.7	107.6	131.5	131.5	167.3	179.3	209.1
Current values for connection	2 poles in parallel	$I_e \times 1.7$												
	3 poles in parallel	$I_e \times 2.4$												
	4 poles in parallel	$I_e \times 3.2$												
Percentage of maximum operational current	600 ops./h (%)	100	100	100	100	100	100	100	100	100	100	100	100	

Models	CWB150	CWB180	CWB225	
Utilization category AC-1				
Conventional thermal current I_{th}	($\theta \leq 55^{\circ}\text{C}$) (A)	225	275	320
	($\theta \leq 65^{\circ}\text{C}$) (A)	180	220	256
	($\theta \leq 75^{\circ}\text{C}$) (A)	158	193	224
Maximum orientative operational current according to the ambient temperature	$0 \leq 55^{\circ}\text{C} (U_e \leq 690\text{ V})$ (A)	225	275	320
Max. operational power $\theta \leq 55^{\circ}\text{C}$ (three-phase resistors)	240 V (kW)	93	114	133
	400 V (kW)	155	190	221
	440 V (kW)	171	209	243
	500 V (kW)	194	238	277
	690 V (kW)	268	328	382
Current values for connection	2 poles in parallel	$I_e \times 1.7$		
	3 poles in parallel	$I_e \times 2.4$		
	4 poles in parallel	-		
Percentage of maximum operational current	600 ops./h (%)	100		







Technical data

Auxiliary contacts

Models	CWB9...125, CAWB (built-in)	BFB (front mounted)	BLB (side mounted)
Compliance with the standards	IEC/EN 60947-5-1	IEC/EN 60947-5-1	IEC/EN 60947-5-1
Rated insulation voltage U_i (pollution degree 3)	IEC/EN 60947-4-1 (V) UL, CSA (V)	690 600	690 600
Rated operational voltage U_e	IEC/EN 60947-4-1 (V) UL, CSA (V)	690 600	690 600
Conventional thermal current I_{th} ($\theta \leq 55^\circ\text{C}$)	(A)	10	10
Rated operational current I_e			
AC-15 (IEC/EN 60947-5-1)	220/230 V (A) 380/440 V (A) 500 V (A) 660/690 V (A)	6 4 2.5 1.5	6 4 2.5 1.5
UL, CSA		A600	A600
DC-13 (IEC/EN 60947-5-1)	24 V (A) 48 V (A) 110 V (A) 220 V (A) 440 V (A) 600 V (A)	4 2 0.7 0.3 0.15 0.1	4 2 0.7 0.3 0.15 0.1
UL, CSA		Q600	Q600
Making capacity	$U_e \leq 690\text{ V}$ 50/60 Hz - AC-15 (A)	$10 \times I_e$	$10 \times I_e$
Breaking capacity	$U_e \leq 400\text{ V}$ 50/60 Hz - AC-15 (A)	$1 \times I_e$	$1 \times I_e$
Short-circuit protection with fuse (gL/gG)	(A)	10	10
Control circuit reliability	(V / mA)	17 / 5	17 / 5
Electrical lifespan	(million cycles)	1	1
Mechanical lifespan	(million cycles)	10	10
Non-overlapping time between NO and NC contacts	(ms)	1.5	1.5
Impedance of the contacts	(mΩ)	2.5	2.5

Technical data


Terminal capacity and tightening torques

		Power circuit							
Model		CWB9...18, CAWB	CWB25...38	CWB40...80	CWB95...125				
Mounting system screw type		Phillips number 2	Phillips number 2	4 mm ALLEN	4 mm ALLEN				
Flexible conductor without ferrule (mm ²)		1 x 1...6	1 x 2.5...10	-	-				
		2 x 1...6	2 x 2.5...10	-	-				
		1 x 1...6	1 x 1.5...10	-	-				
		2 x 1...4	2 x 1.5...6	-	-				
		1 x 1...6	1 x 2.5...10	-	-				
Flexible conductor with ferrule (mm ²)		2 x 1...6	2 x 2.5...10	-	-				
		1.7	2.5	-	-				
		-	-	1 x 2.5...35	1 x 2.5...70				
		-	-	2 x 2.5...35	2 x 2.5...70				
		-	-	1 x 2.5...35	1 x 2.5...70				
Solid wire (mm ²)		2 x 1...6	2 x 2.5...35	2 x 2.5...35	2 x 2.5...70				
		1 x 1...6	1 x 2.5...10	-	-				
		2 x 1...6	2 x 2.5...10	-	-				
		1.7	2.5	-	-				
		-	-	5.0	6.0				
		Power circuit							
Model		CWB150...225_RT							
Mounting system screw type			Allen M8						
Flexible conductor with ferrule (mm ²)			2x 50...185						
Busbar - maximum dimensions (mm)			2x (20x3)						
Tightening torque (Nm)			24						
		Power circuit							
Model		CWB150...225_TB							
Mounting system screw type			Allen M8						
Flexible conductor with ferrule (mm ²)			1 or 2x 50...120						
Flexible conductor without ferrule (mm ²)			1 or 2x 50...120						
Tightening torque (Nm)			24						
		Control and auxiliary circuit							
Model		CWB9...225, CAWB							
Mounting system screw type			Phillips number 2						
Flexible conductor without ferrule (mm ²)			1 x 1...4 2 x 1...4						
Flexible conductor with ferrule (mm ²)			1 x 1...4 2 x 1...2.5						
Solid wire (mm ²)			1 x 1...4 2 x 1...4						
Tightening torque (Nm)			1.0						
		Auxiliary contact blocks							
Model		BFB (front mounted)		BLB (side mounted)					
Mounting system screw type		Phillips number 2							
Flexible conductor without ferrule (mm ²)			1 x 1...2.5 2 x 1...2.5						
Flexible conductor with ferrule (mm ²)			1 x 1...2.5 2 x 1...2.5						
Solid wire (mm ²)			1 x 1...2.5 2 x 1...2.5						
Tightening torque (Nm)			1.0						


Technical data

Electrical lifespan curves

Category AC-3 ($U_e \leq 440$ VAC)

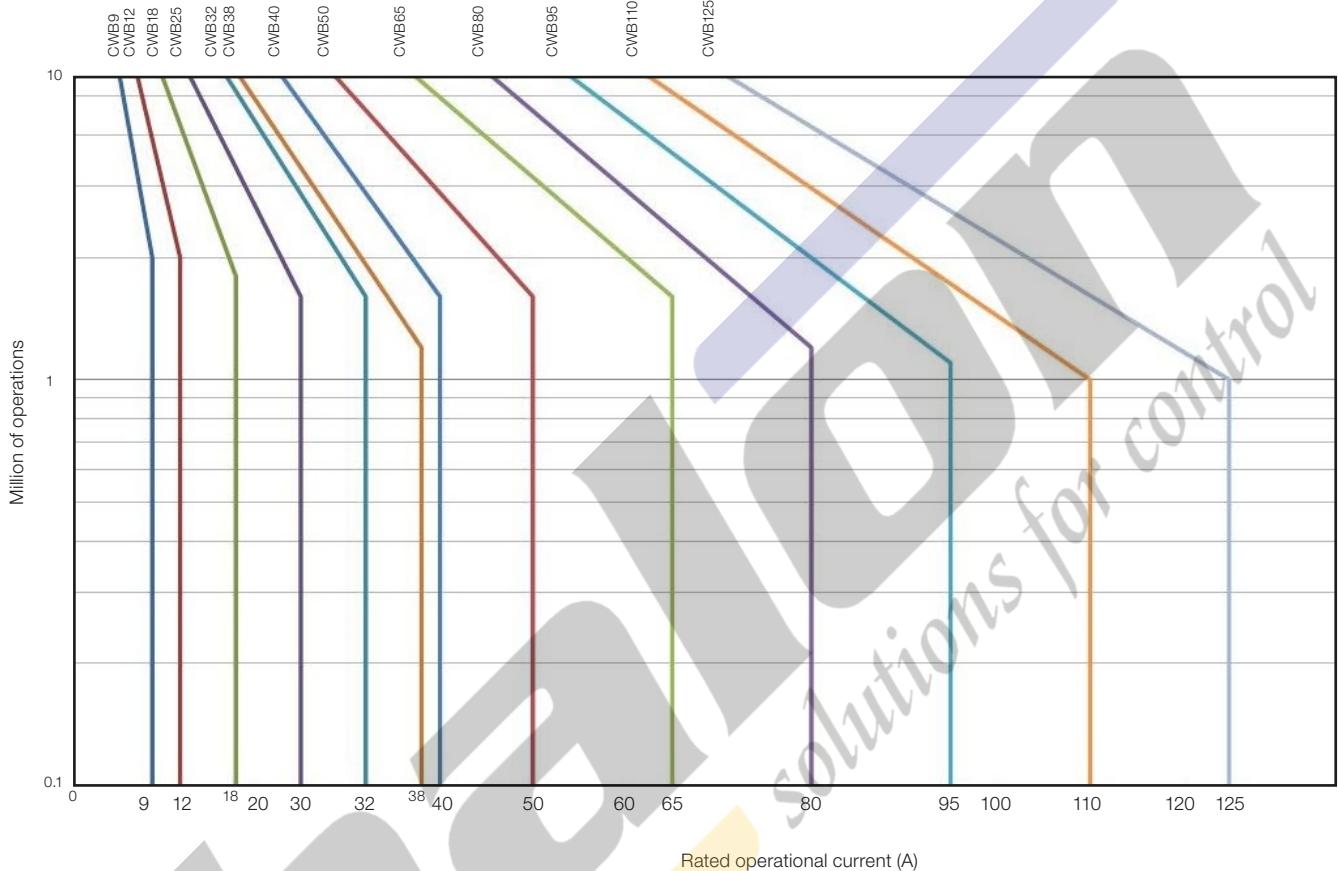


Category AC-4 and AC-2 ($U_e \leq 440$ VAC)

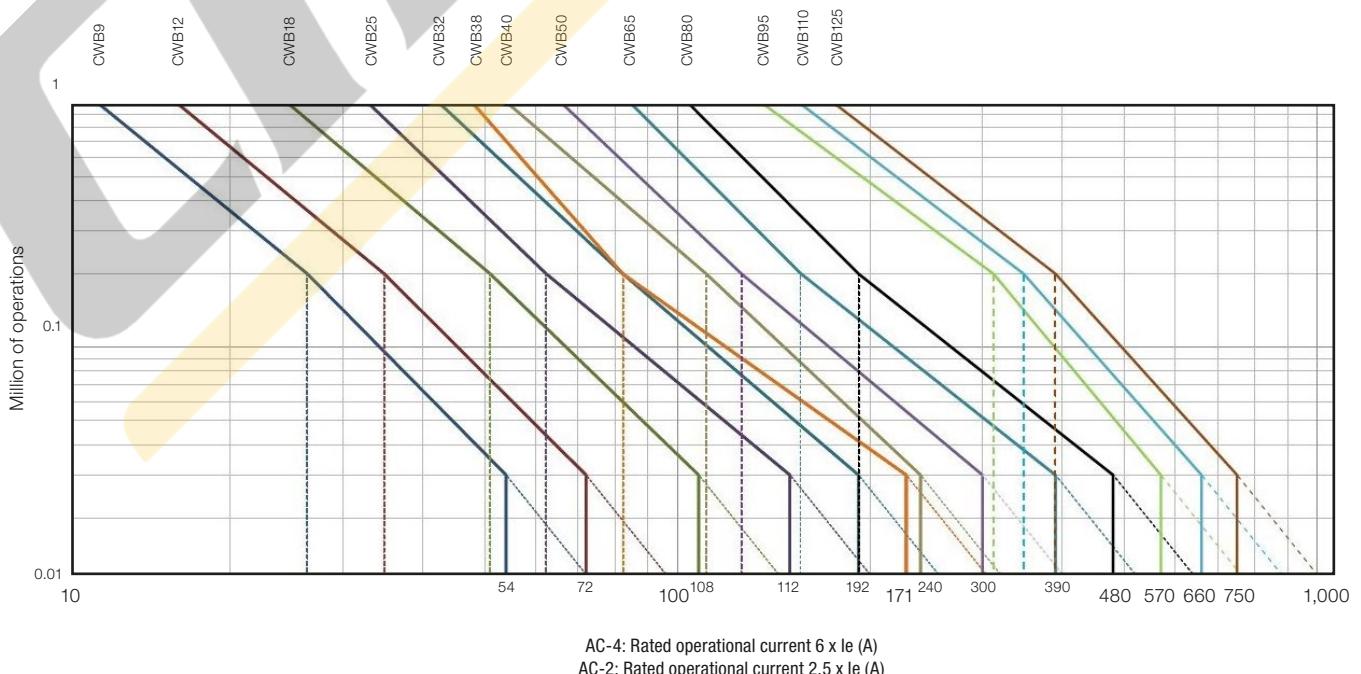


Technical data

Electrical lifespan curves

Category AC-1 ($U_e \leq 690$ VAC)

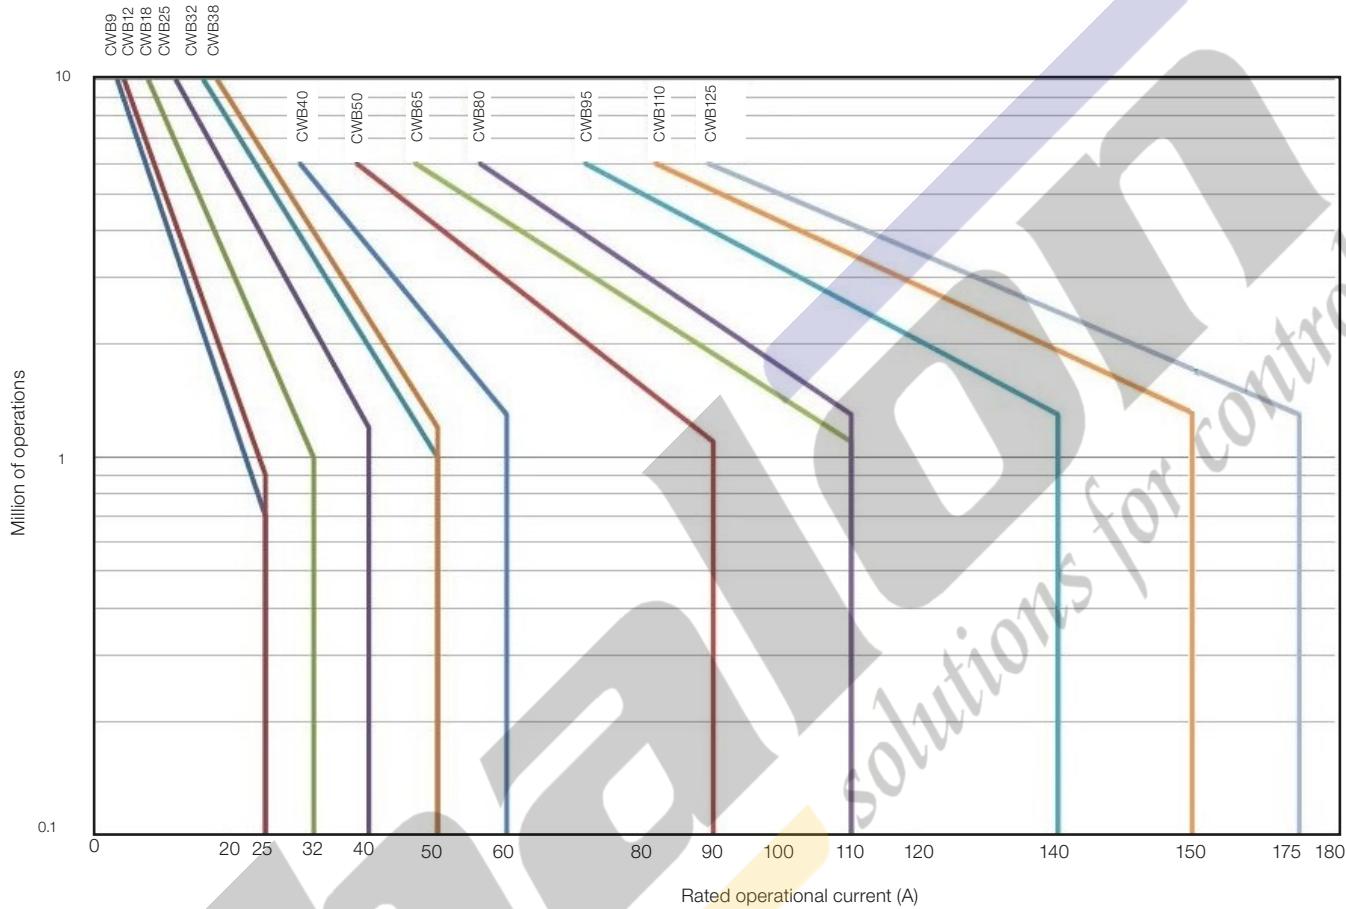


Category AC-4 and AC-2 ($U_e \leq 660 / 690$ V)

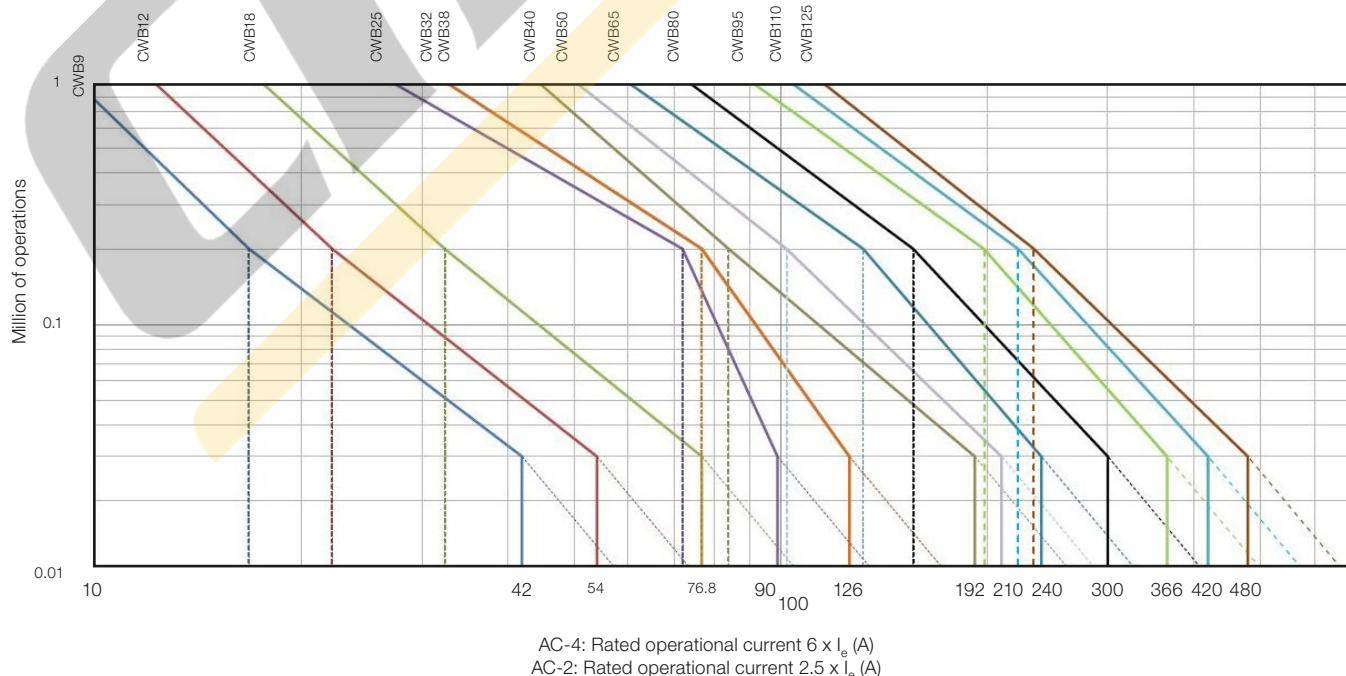


Dimensions (mm)


CWB9...38 / CAWB

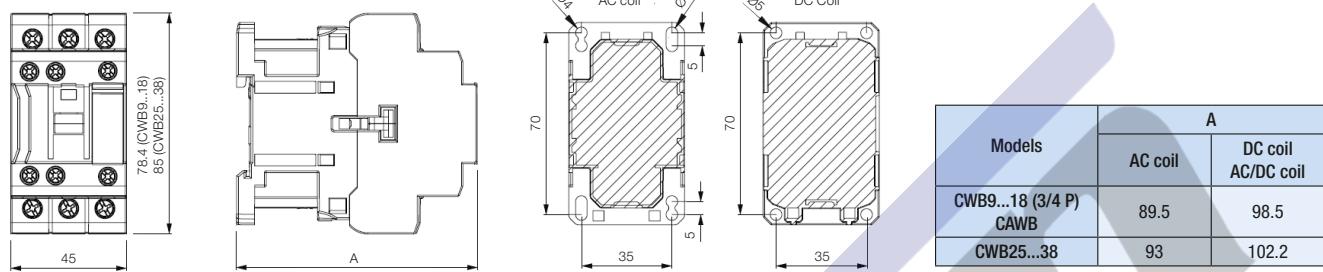


CWB40...80

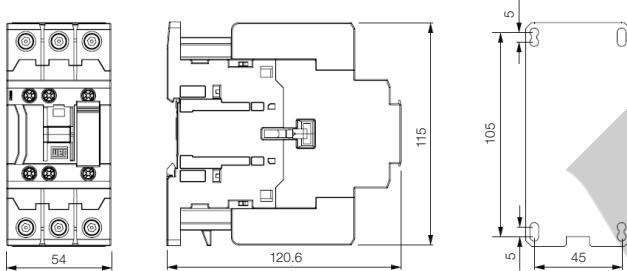

CWB95...125

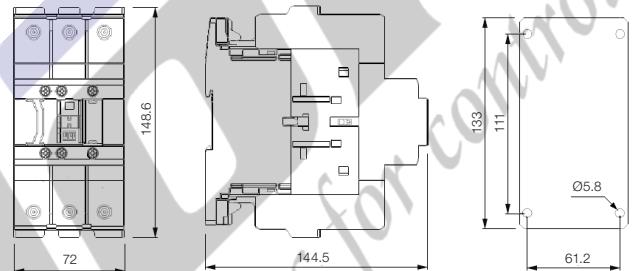


CWB9...125 / CAWB + BFB (front contact block)

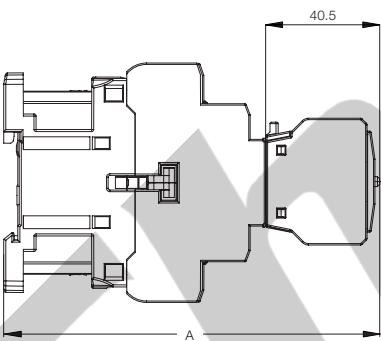


Models	A	
	AC coil	DC coil
CWB9...18 (3/4 P) and CAWB	130	139.2
CWB25...38	133.4	142.6
CWB40...80	161.1	161.1
CWB95...125	184.5	184.5

CWB9...125 / CAWB + BLB / BLRB (side-mounted contact block)

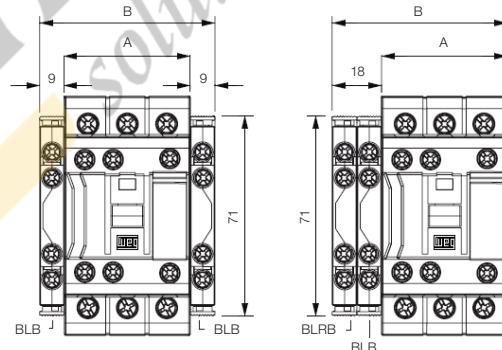


Models	A	B
CWB9...18 (3/4 P) and CAWB	45	63
CWB40...80	54	72
CWB95...125	72	90

CWB9...125 / CAWB + IM (mechanical interlock)




Models	Interlock	A
CWB9...18 CAWB	IM1	90
CWB40...80	IM2	108
CWB95...125		144

Mounting position CWB9...225 / CAWB

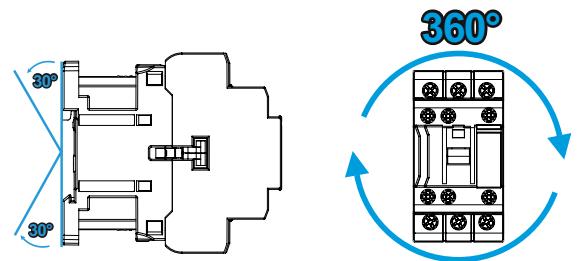


Dimensions (mm)


CWB150...225_RT

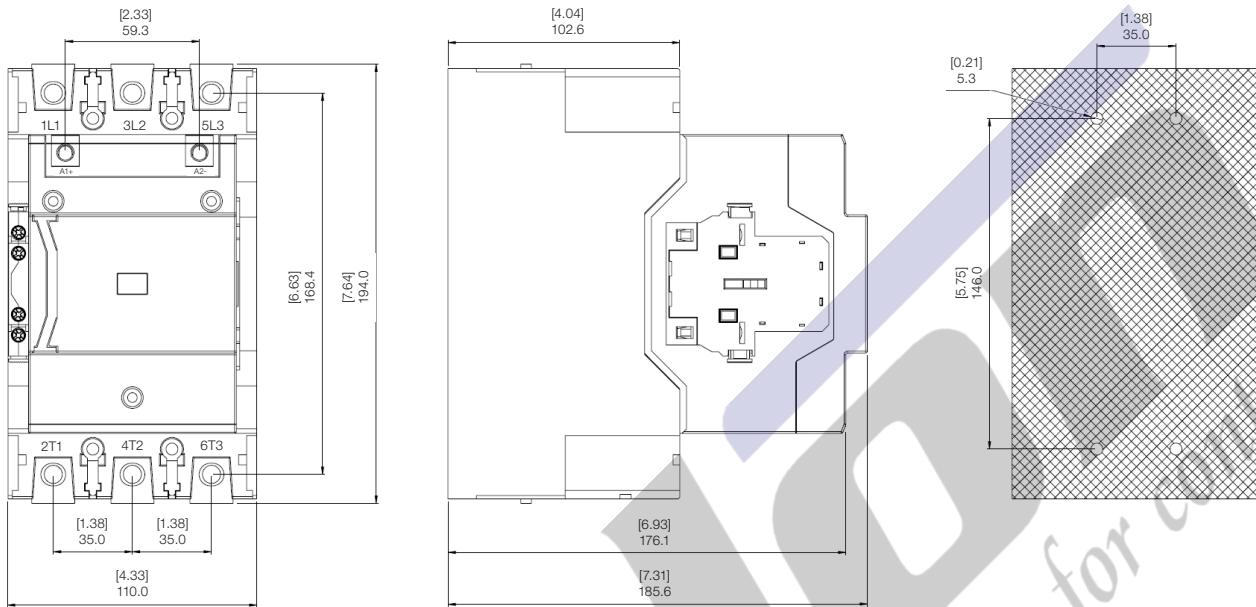

CWB150...225_TB

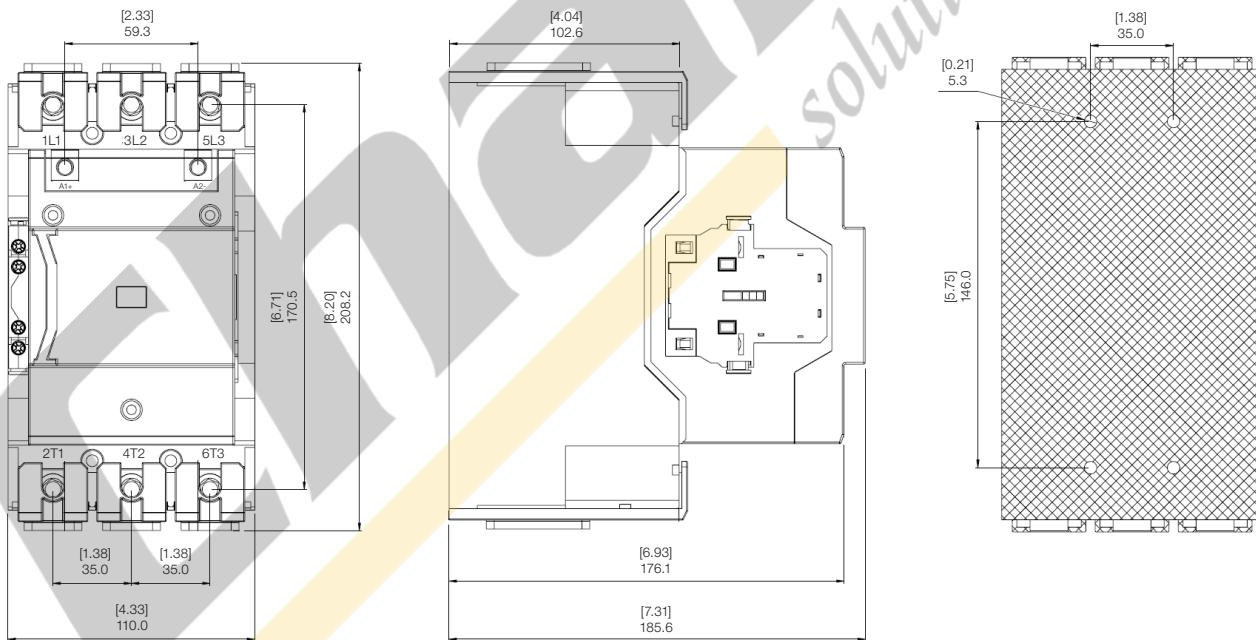


Dimensions (mm)

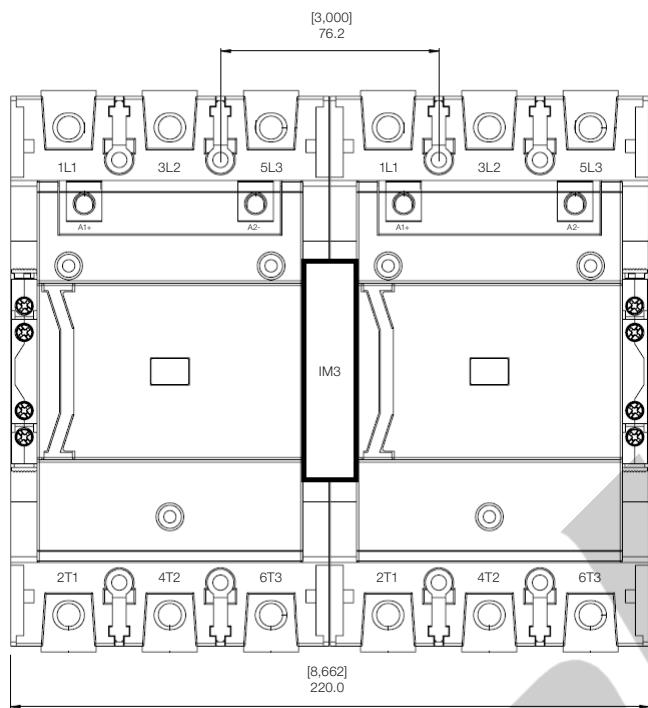
CWB150...225 + IM3

Dimensions (mm)

CWB9...38 + MPW18

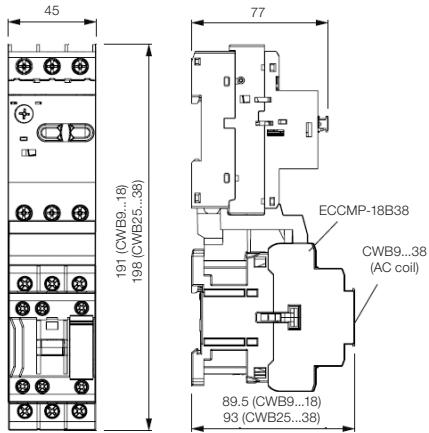


CWB9...38 + MPW40 CWB40...80 + MPW80

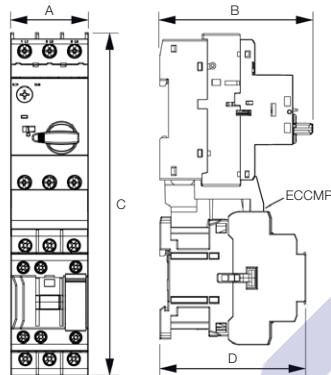


Mounting with MPW40			
A	45	B	98
AC coil contactor	CWB9...18	DC coil contactor	CWB25...38
CWB9...18	CWB25...38	CWB9...18	CWB25...38
*	ECCMP-40B38	ECCMP-40B38DC	

Mounting with MPW80			
A	54	B	156.6
AC coil contactor	CWB40...80	DC coil contactor	CWB40...80
CWB40...80	CWB40...80	CWB40...80	CWB40...80
*	ECCMP-80B80		


CWB9...38 + RW27-2D

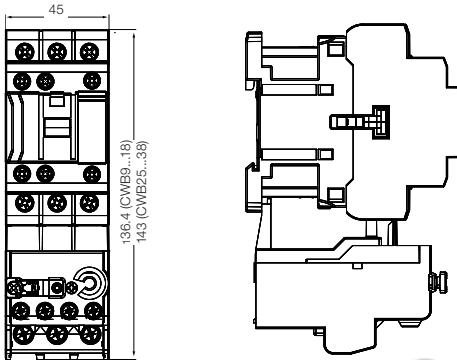


CWB9...38 + busbar

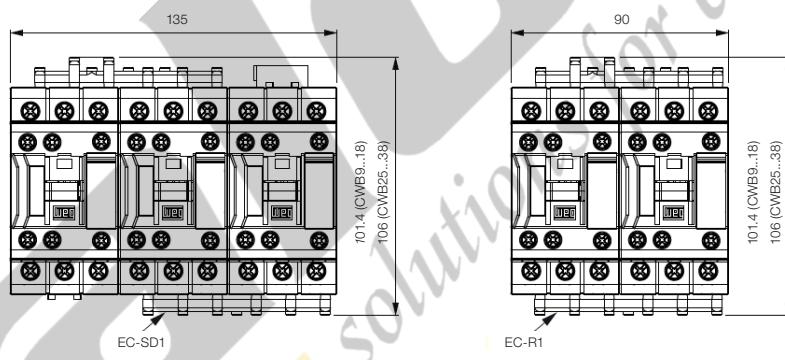


CWB40...80 + RW67-5D

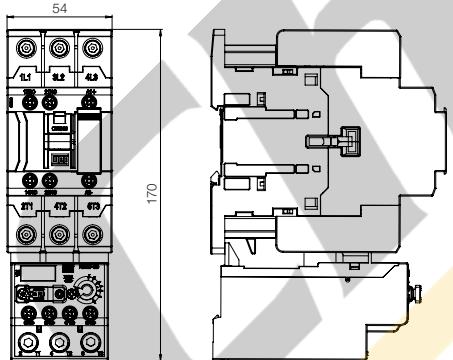

CWB40...80 + busbar

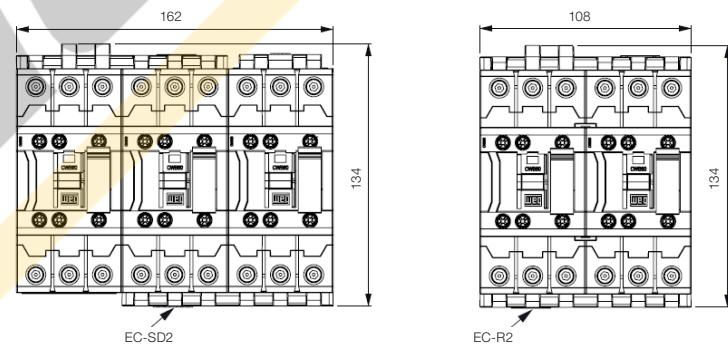

CWB95...125 + RW117-3D

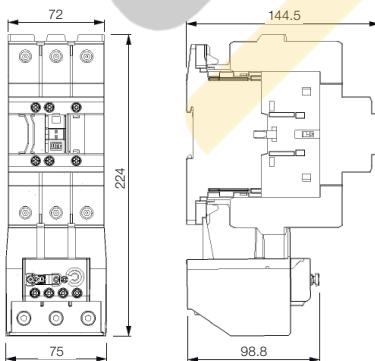

Notes

Global presence

is essential, as much
as understanding
your needs.

Global Presence

With more than 40,000 employees worldwide, WEG is one of the largest electric motors, electronic equipments and systems manufacturers. We are constantly expanding our portfolio of products and services with expertise and market knowledge. We create integrated and customized solutions ranging from innovative products to complete after-sales service.

WEG's know-how guarantees our **CWB - Contactors** are the right choice for your application and business, assuring safety, efficiency and reliability.





Availability is to have a global support network



Partnership is to create solutions that suits your needs




Competitive edge is to unite technology and innovation

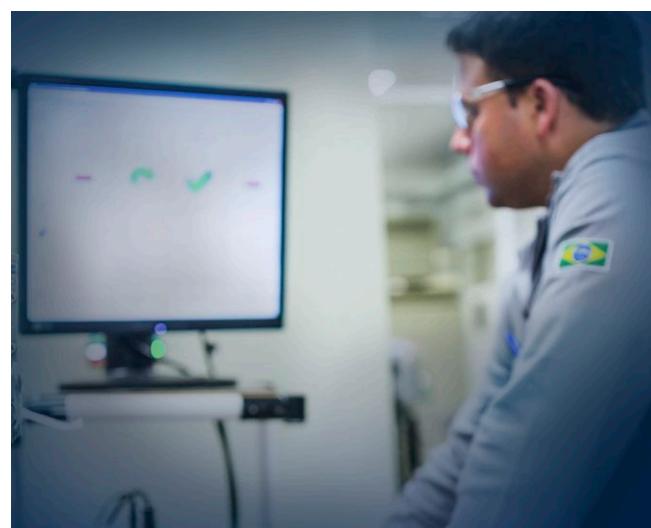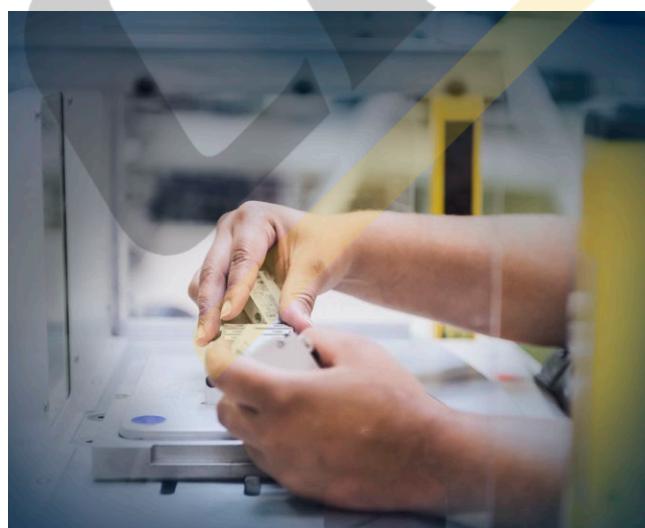

Know More

High performance and reliable products to improve your production process.

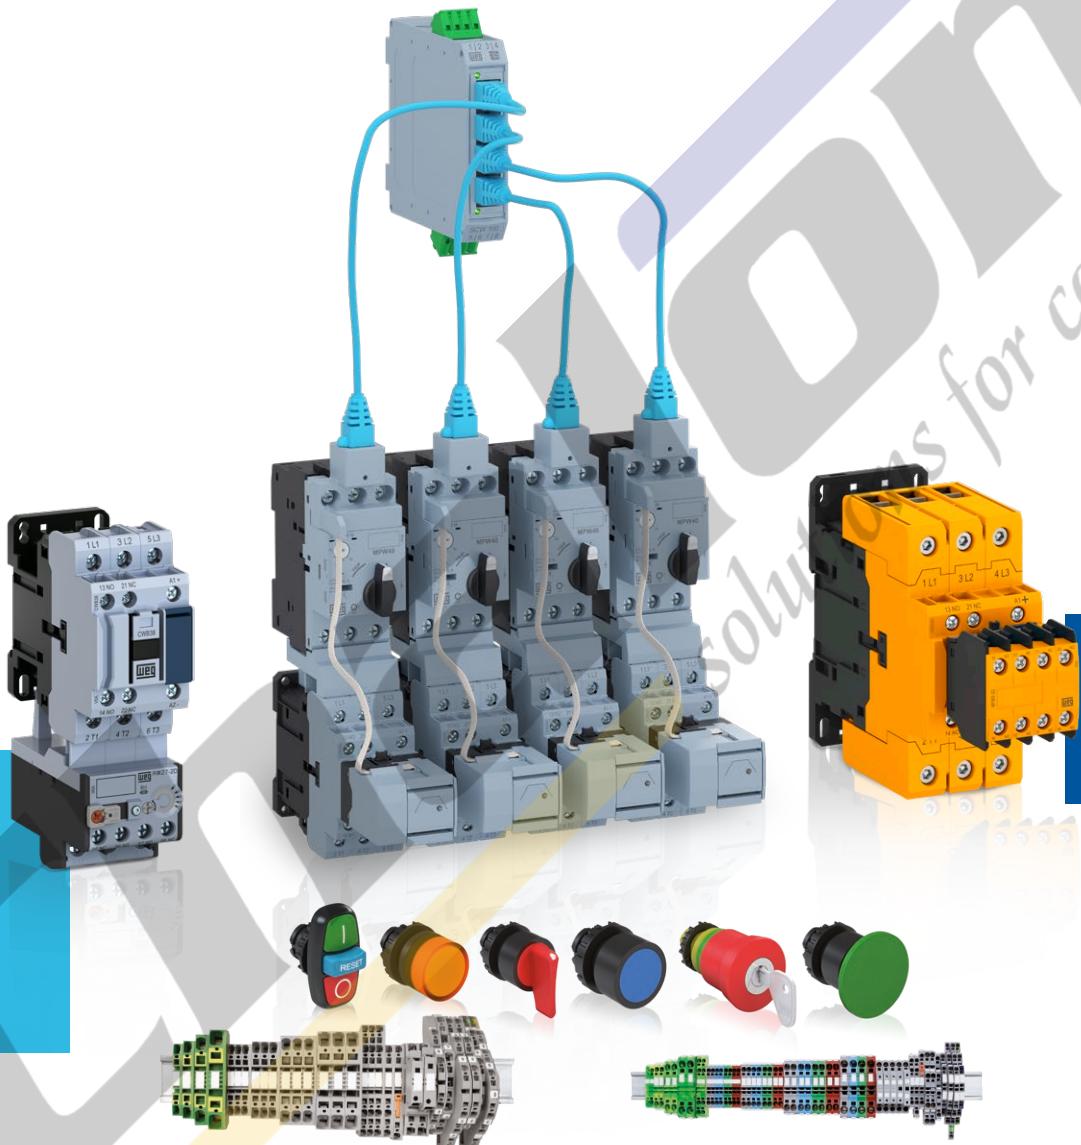

Excellence is to provide a whole solution in industrial automation that improves our customers productivity.

Visit:

www.weg.net



youtube.com/wegvideos

The scope of WEG Group solutions
is not limited to products and solutions
presented in this catalogue.

To see our portfolio, contact us.

For WEG's worldwide
operations visit our website



www.weg.net



+55 47 3276.4000

automacao@weg.net

Jaraguá do Sul - SC - Brazil

Cod: 50041278 | Rev: 14 | Date (m/y): 09/2024.
The values shown are subject to change without prior notice.
The information contained is reference values.