

Terminals

Blade Terminals

• Materials:

Conductor: Copper.

Insulation: Vinyl.

Plating: Tin.

• Operating Temperature:

-10°C to +75°C.

• Features:

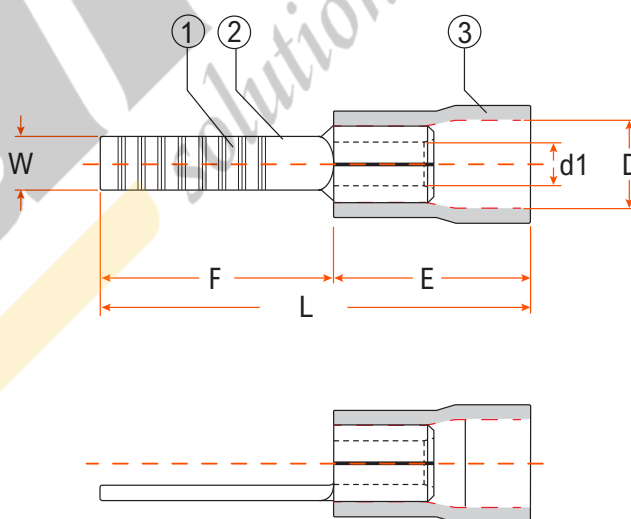
Max. voltage rating: 600V.

Flared barrel for easy wire insertion.

Low insertion force and easy crimping whilst ensuring secure termination.


Material

- ① Copper
- ② Tin
- ③ Vinyl


Max. current rating

Red	19A
Blue	27A
Yellow	48A

See product technical table
on next page

Terminals

Blade Terminals

Item No.	Colour	Wire Range (mm ²)	Dimensions (mm)					
			D	d1	W	L	E	F
RB2310	Red	0.5-1.5	4.3	1.7	2.3	20.0	10.0	10.0
RB2318	Red	0.5-1.5	4.3	1.7	2.2	28.0	10.0	18.0
RB2809	Red	0.5-1.5	4.3	1.7	2.8	19.0	10.0	9.0
RB3014	Red	0.5-1.5	4.3	1.7	2.4	24.0	10.0	14.0
BB2318	Blue	1.5-2.5	4.8	2.3	2.2	28.0	10.0	18.0
BB2809	Blue	1.5-2.5	4.8	2.3	2.8	19.0	10.0	9.0
YB2810	Yellow	4.0-6.0	6.7	3.4	2.8	23.0	13.0	10.0
YB4518	Yellow	4.0-6.0	6.7	3.4	4.5	31.0	13.0	18.0