





A range of trailing and fixed plugs and socket-outlets for industrial use, complying with the dimensional and performance standards unified at International level (IEC 60309) and assimilated by the European Standards (EN 60309) and Italian Standards (CEI 23-12). Socket-outlets and plugs with a rated current of 63 and 125A are equipped with an extra pilot contact (CP) for creating an electric interlock. The range is completed with 90° fixed plugs and 10° and 90° fixed socket-outlets. Sleeves and pins are obtained from solid brass bar, type Pt. CuZn40Pb2 (Cu 58%, Zn 40%, Pb 2%); anti-loosening terminals with unlosable screws, and built-in cable clamp with anti-abrasion cable gland.

|                              |                                                                           |                             |                                               |
|------------------------------|---------------------------------------------------------------------------|-----------------------------|-----------------------------------------------|
| Colour                       | Red                                                                       | Rated current (A)           | 32                                            |
| IP degree                    | IP44                                                                      | No. of poles                | 3P+N+E                                        |
| Mechanical resistance        | IK08                                                                      | Reference h                 | 6                                             |
| Rated voltage                | 380-415 V                                                                 | Flange dimensions (mm)      | 95x80                                         |
| Type                         | Straight flush mounting inlet                                             | Frequency                   | 50/60 Hz                                      |
| Terminal tightening capacity | 2.5-6mm <sup>2</sup> flexible cables - 2.5-10mm <sup>2</sup> rigid cables | Operating temperature       | -25 +55 °C                                    |
| Type of wiring               | With screw                                                                | Electrocod                  | 2230                                          |
| Glow wire test               | 850 °C (active parts) - 650 °C (passive parts)                            | Total number of operations  | > 2000                                        |
| Permissible overload         | 42 A                                                                      | Breaking capacity at 1.1 Un | 40 A                                          |
| Insulation resistance        | > 10 MΩ                                                                   | Thermo-pressure with ball   | 125 °C (active parts) - 80 °C (passive parts) |

## BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

| Saline solution | Acids         |                    | Bases              |           | Solvents  |           |           |            | Mineral oil | UV rays   |
|-----------------|---------------|--------------------|--------------------|-----------|-----------|-----------|-----------|------------|-------------|-----------|
|                 | Concentrated  | Diluted            | Concentrated       | Diluted   | Hexane    | Benzol    | Acetone   | Alcohol    |             |           |
| Resistant       | Not resistant | Limited resistance | Limited resistance | Resistant | Resistant | Resistant | Resistant | Resistente | Resistant   | Resistant |

## DIMENSIONAL

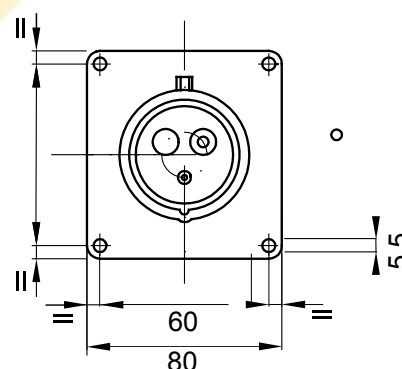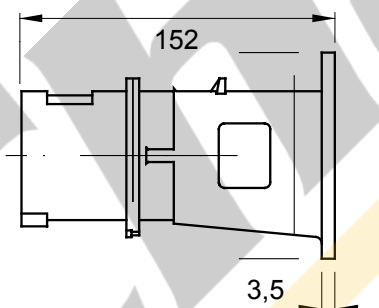


## TECHNICAL SYMBOLOGY

IP

IP44

IK

IK08



-25 +55 °C



With screw

GWT

850 °C (active parts)  
- 650 °C (passive parts)125 °C (active parts)  
- 80 °C (passive parts)

## STANDARDS/APPROVALS



GEWISS S.p.A. Via Domenico Bosatelli 1  
24069 Cenate Sotto - Bergamo - Italy  
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com  
sat@gewiss.com  
Last update 01/08/2024

Data, measures, designs and pictures are shown  
only as informative purposes,  
and could be changed without previous notice