

Characteristics

Material

Stainless Steel 304L (EN 10088 1.4307)

■ Body : 1.2 mm

■ Lid : 1.2 mm

Surface Finishing

■ Scotch-brite brushed

IP Rating

■ IP55 (TS 3033, EN 60529)

Others

- Fully welded construction
- Screwed plain lid
- One piece EPDM lid gasket
- Ready for DIN rail fixing



On Request



- Special sizes
- Pre-punching
- 316L Grade SS

Supply Includes





- Body
- Lid
- Lid gasket
- Lid screws

Complementary Accessories


- DIN rail
- Wall bracket
- Earthing cable

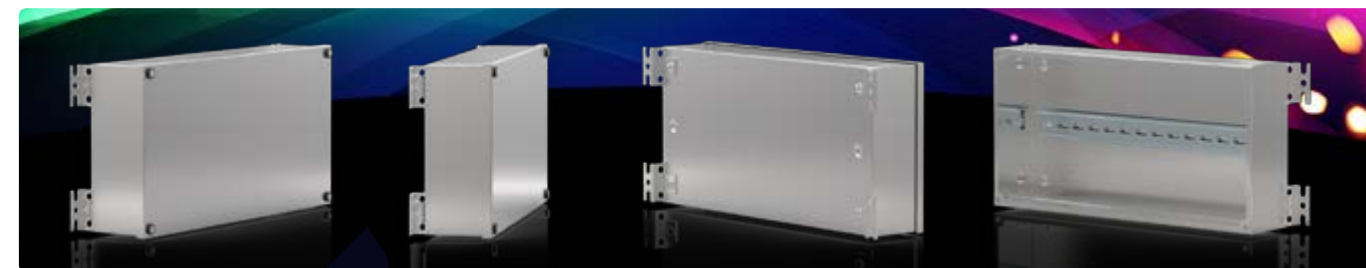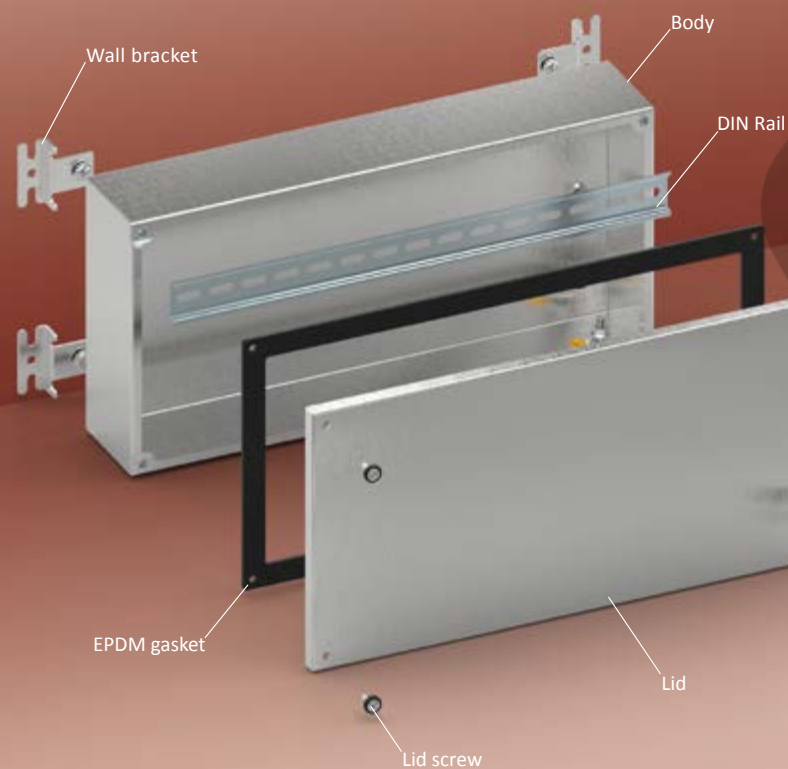


Width	Height	Depth	Reference	Useful Area			Wall Mounting				DIN Rail Fixing	Weight
				Lid		Side	With Bracket		Internal			
				↔ mm	↕ mm	↗ mm	↔ mm	↕ mm	↔ mm	↕ mm		
mm	mm	mm		mm	mm	mm	mm	mm	mm	mm	mm	kg
80	160	60	SSJB 081606	45	125	44	---	184	---	118	30	0.6
100	100	60	SSJB 101006	65	65	44	---	124	---	58	50	0.6
120	120	60	SSJB 121206	85	85	44	---	144	78	68	70	0.7
160	160	80	SSJB 161608	125	125	64	184	108	118	108	110	1.4
200	200	80	SSJB 202008	165	165	64	224	148	158	148	150	1.9
300	200	100	SSJB 302010	265	165	84	324	148	258	148	250	2.4
	300	100	SSJB 303010	265	265	84	324	248	258	248	2 x 250	3.2
400	200	100	SSJB 402010	365	165	84	424	148	358	148	350	2.8

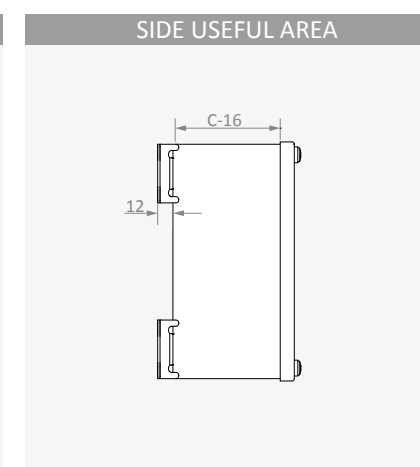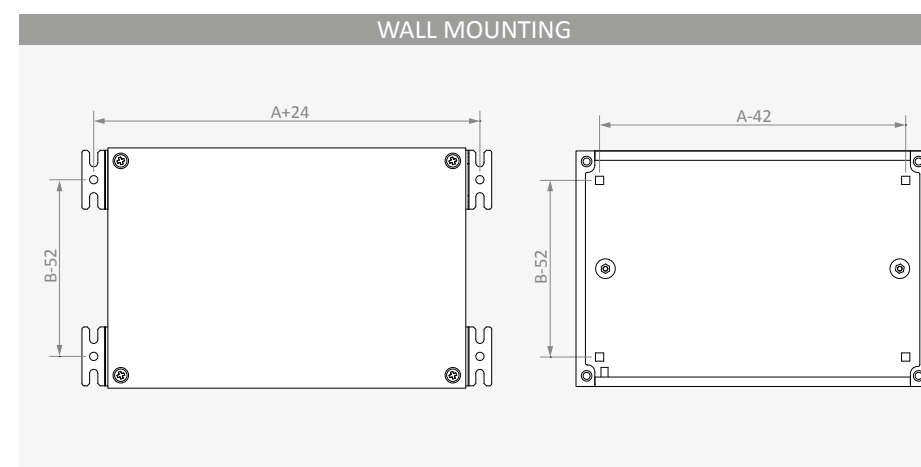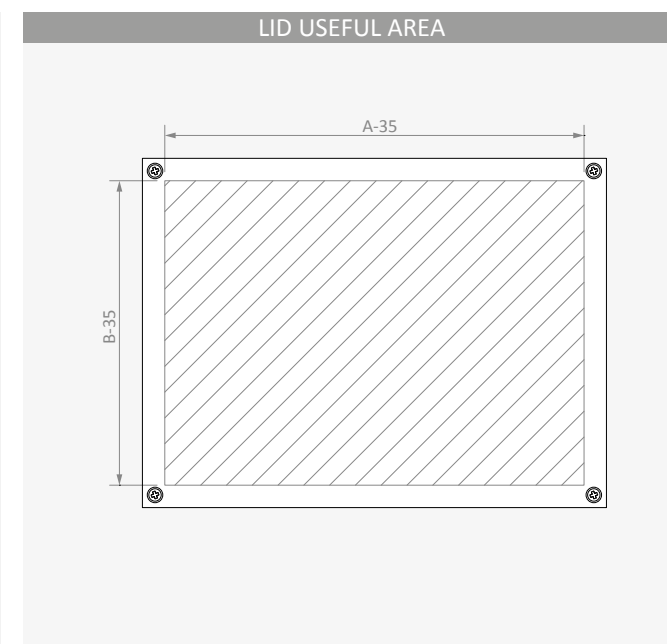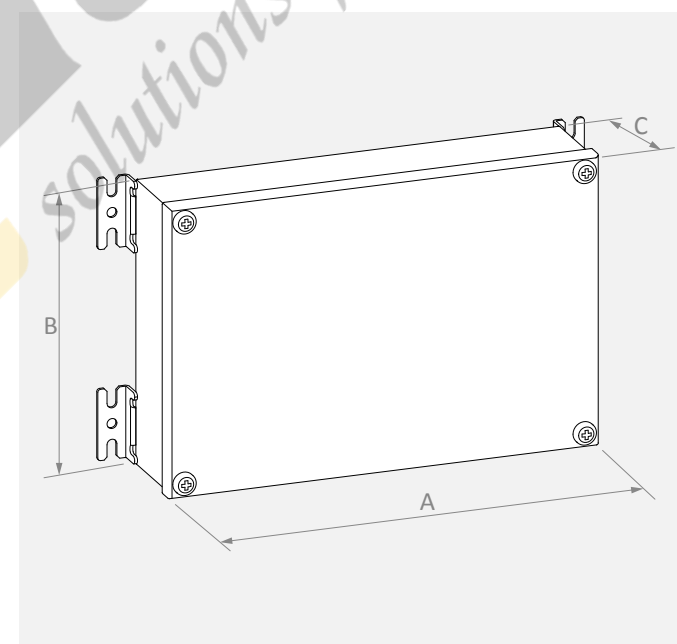



DIN RAILS					
Reference	Width	Height	Hole	Length	Weight
	mm	mm	Yes/No	m	kg/pcs
MR KL 500603	35	7.5	No	2	0.7
MR KL 500604	35	7.5	Yes	2	0.7
MR KL 500609	35	15	Yes	2	1.2
Characteristics					
■ Material	DIN EN 10130 DC01 CCRS				
■ Surface Finishing	Zinc coated Cr ³ passivation				
■ Standards	DIN EN 60715				

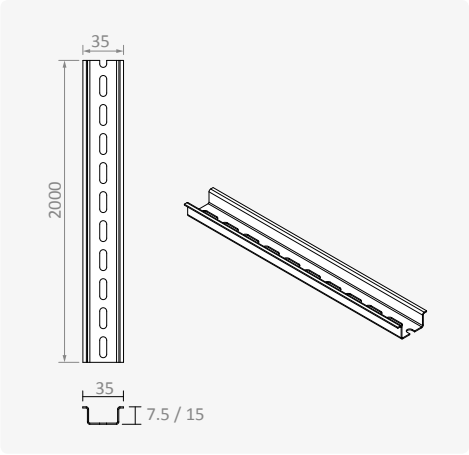

LID MOUNTING FASTENERS			
Reference	Packet	Weight	Supply Includes
	pcs/packet	kg/packet	
AK AK JB 051210	50	0.17	■ 50 pcs M5 x 12 YSB screws ■ 50 pcs M5 Finishing washer

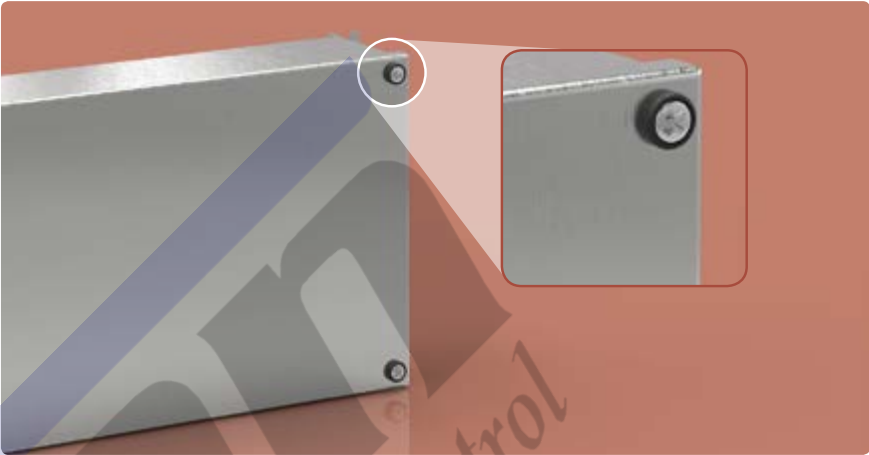

WALL BRACKETS					
Reference	Packet	Weight	Characteristics		Supply Includes
	pcs/packet	kg/packet	■ Material	316L EN 10088 1.4404	■ Wall mounting screws
SSAK KL 010	4	0.16	■ Surface Finishing	Scotch-brite	
			■ Thickness	2 mm	

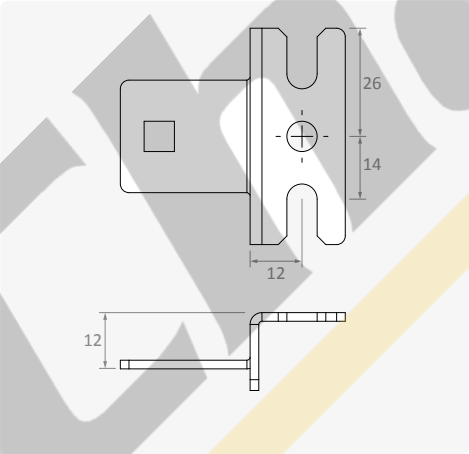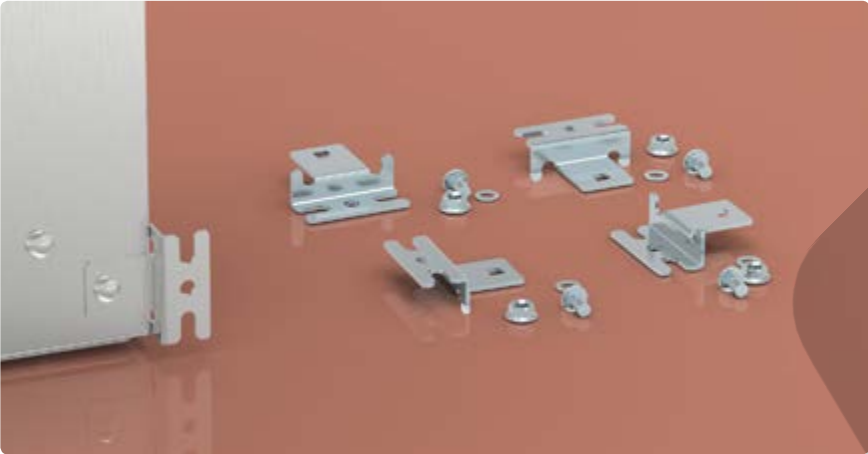

EARTHING CABLE						
Reference	Material	Cross-Section	Length	Connection	Packet	Weight
		mm ²	mm		pcs/packet	kg/packet
KB OZ 061908080	Yellow - Green, Isolated copper conductor	6	190	M8-M8	10	0.16

