

Terminals

Pin Terminals

• Materials:

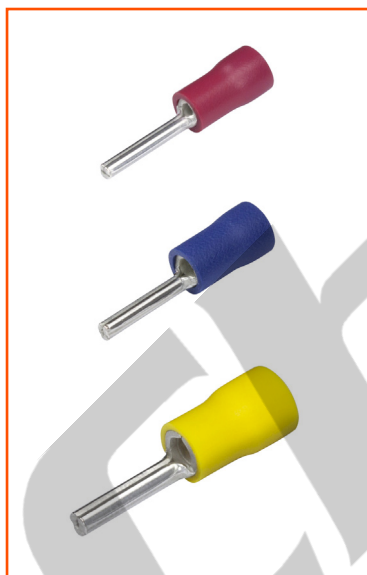
Conductor: Copper.
Insulation: Vinyl.
Plating: Tin.

• Operating Temperature:

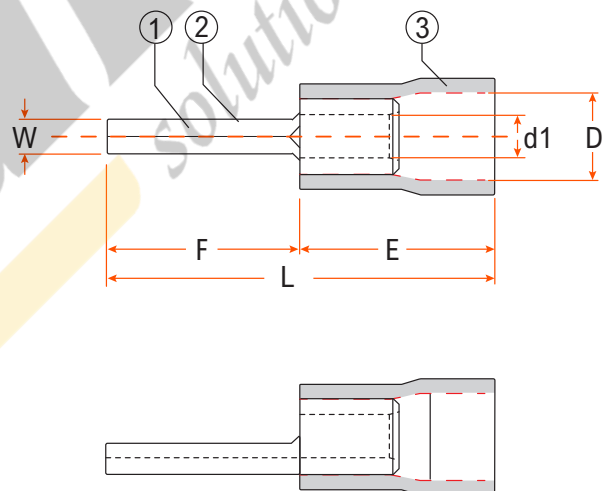
-10°C to +75°C.

• Features:

Max. voltage rating: 600V.
Flared barrel for easy wire insertion.
Low insertion force and easy crimping whilst ensuring secure termination.


Material

- ① Copper
- ② Tin
- ③ Vinyl


Max. current rating

Red	19A
Blue	27A
Yellow	48A

See product technical table
on next page

Terminals

Pin Terminals

Item No.	Colour	Wire Range (mm ²)	Dimensions (mm)					
			D	d1	W	L	E	F
RP1909	Red	0.5-1.5	4.3	1.7	1.9	18.8	10.0	9.0
RP1912	Red	0.5-1.5	4.3	1.7	1.9	21.8	10.0	12.0
BP1909	Blue	1.5-2.5	4.8	2.3	1.9	18.8	10.0	9.0
BP1912	Blue	1.5-2.5	4.8	2.3	1.9	21.8	10.0	12.0
YP2914	Yellow	4.0-6.0	6.7	3.4	2.8	26.0	13.0	13.0