

Quick Disconnects

Bullet Male Quick Disconnects

**• Materials:**

Conductor: Brass
 Sleeve: Copper tubular
 Insulation: Vinyl
 Plating: Tin

• Operating Temperature:

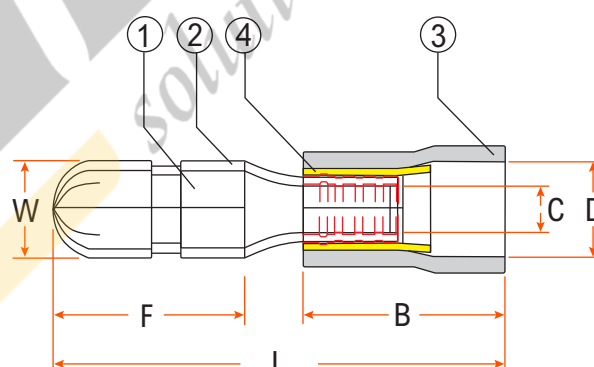
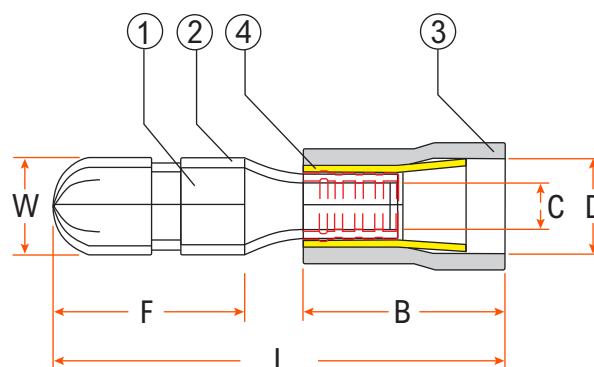
-10°C to +75°C.

• Features:

Max. voltage rating: 300V.
 Flared barrel for easy wire insertion.
 Low insertion force and easy crimping whilst ensuring secure termination.

**Material**

- ① Brass
- ② Tin
- ③ Vinyl
- ④ Copper

Standard Internal Copper Sleeve**Long Internal Copper Sleeve****Max. current rating**

Red	10A
Blue	15A
Yellow	24A

See product technical table
on next page

Quick Disconnects

Bullet Male Quick Disconnects

Item No.	Colour	Wire Range (mm ²)	Dimensions (mm)					
			B	C	D	W	L	F
RBU40	Red	0.5-1.5	10.0	1.7	3.9	4.0	21.0	8.5
RBU40L	Red	0.5-1.5	10.0	1.7	3.9	4.0	21.0	8.5
BBU40	Blue	1.5-2.5	10.0	2.3	4.7	4.0	21.0	8.5
BBU50	Blue	1.5-2.5	10.0	2.3	4.7	4.0	21.0	8.5
BBU50L	Blue	1.5-2.5	10.0	2.3	4.7	5.0	22.5	10.0
YBU50	Yellow	4.0-6.0	13.0	3.4	6.2	5.0	25.5	10.0
YBU50L	Yellow	4.0-6.0	13.0	3.4	6.2	5.0	25.5	10.0

L suffix on Item No. denotes long internal copper sleeve.