

Characteristics

Material

Sheet Steel (EN 10130 DC01)

■ Body : 1.2 mm

■ Lid : 1.2 mm

Surface Finishing

■ RAL7035w powder coating

IP Rating

■ IP55 (TS 3033, EN 60529)


Others

- Fully welded construction
- Screwed plain lid
- One piece EPDM lid gasket
- Ready for DIN rail fixing



On Request

- Special sizes
- Special colour
- Pre-punching

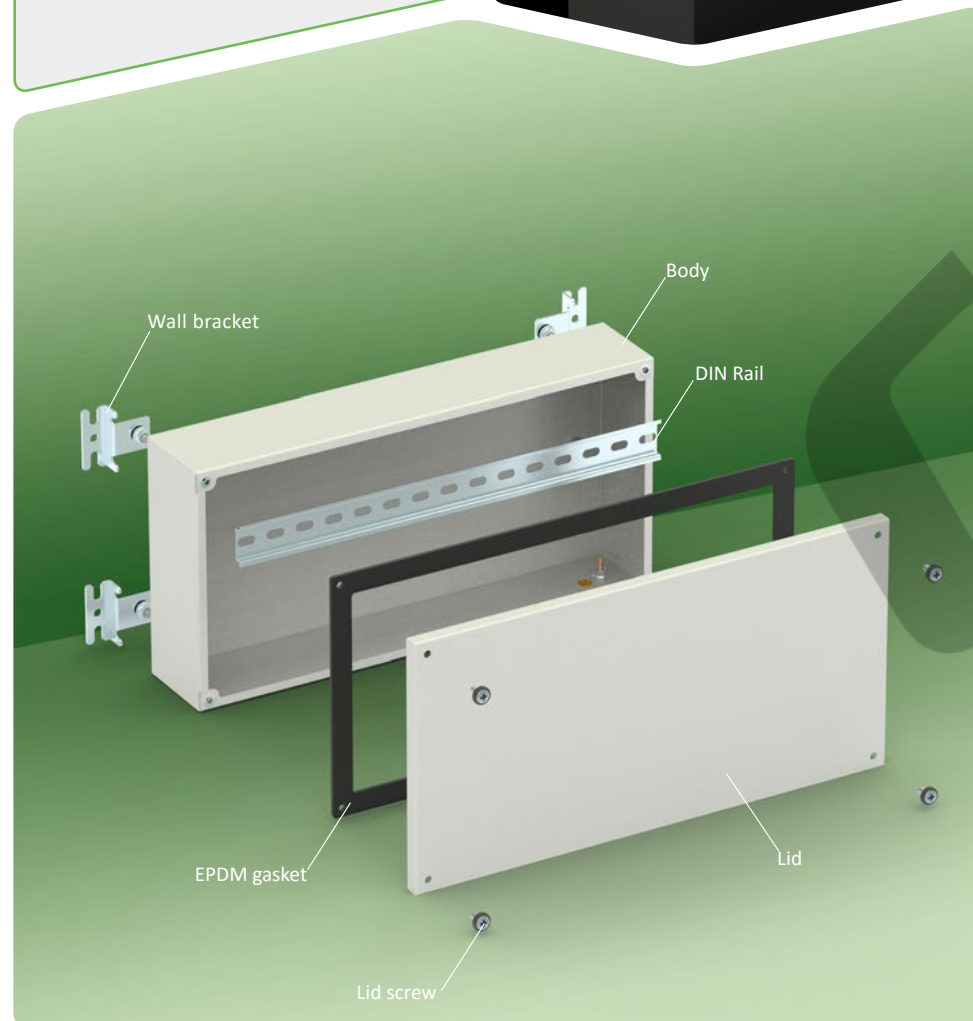

Supply Includes


- Body
- Lid
- Lid gasket
- Lid screws

Complementary Accessories


- DIN rail
- Wall bracket 2/4
- Earthing cable




Width A mm	Height B mm	Depth C mm	Reference	Useful Area			Wall Mounting						DIN Rail Fixing	Weight
				Lid		Side	With Bracket				Internal			
							Side		Up/Down					
				↔ mm	↕ mm	↗ mm	↔ mm	↕ mm	↔ mm	↕ mm	↔ mm	↕ mm	↔ mm	↕ mm
80	160	60	JB 081606	45	125	44	---	118	---	184	---	118	30	0.6
100	100	60	JB 101006	65	65	44	---	58	---	124	---	58	50	0.6
120	120	60	JB 121206	85	85	44	---	78	---	144	---	78	70	0.7
150	150	60	JB 151506	115	115	44	---	108	---	174	---	108	100	0.9
160	160	80	JB 161608	125	125	64	---	118	---	184	---	118	110	1.4
200	200	80	JB 202008	165	165	64	---	158	---	224	---	158	150	1.9
300	200	100	JB 302010	265	165	84	324	158	258	224	258	148	250	2.4
	300	100	JB 303010	265	265	84	324	258	258	324	258	248	2 x 250	3.2
400	200	100	JB 402010	365	165	84	424	158	358	224	358	148	350	2.8
	300	100	JB 403010	365	265	84	424	258	358	324	358	248	2 x 350	4.0
	400	100	JB 404010	365	365	84	424	358	358	424	358	348	2 x 350	5.0

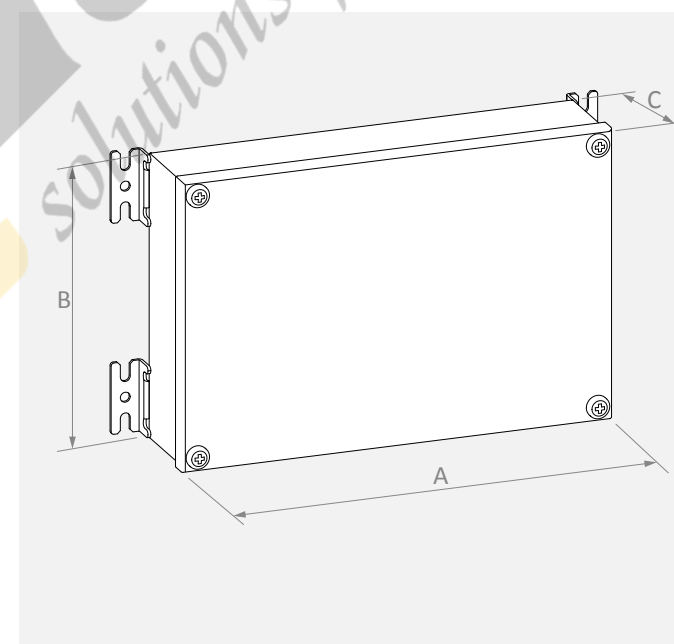


LID USEFUL AREA

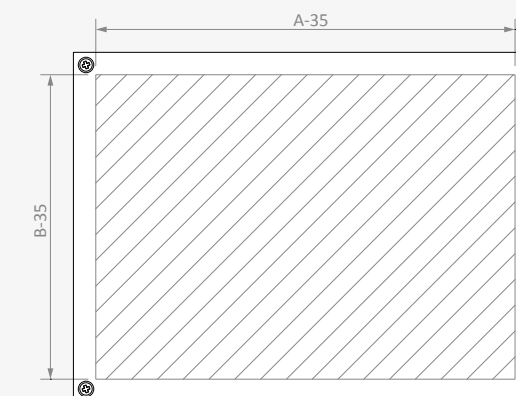

WALL MOUNTING

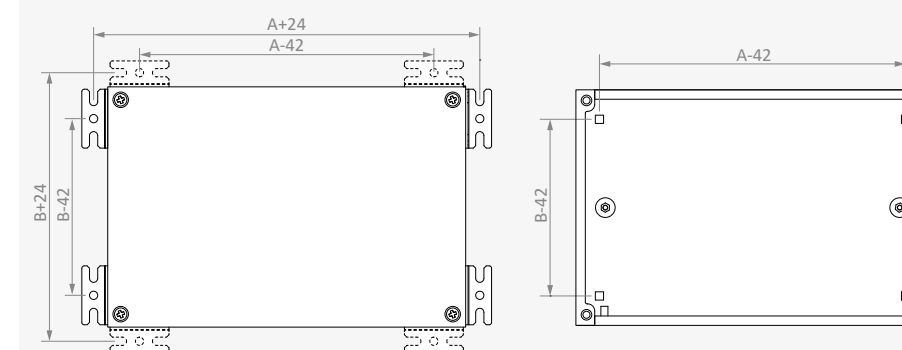


DEPTH DIMENSIONS



DIN RAILS


Reference	Width	Height	Hole	Length	Weight
	mm	mm	Yes/No	m	kg/pcs
MR KL 500603	35	7.5	No	2	0.7
MR KL 500604	35	7.5	Yes	2	0.7
MR KL 500609	35	15	Yes	2	1.2

Characteristics	
■ Material	DIN EN 10130 DC01 CCRS
■ Surface Finishing	Zinc coated Cr ⁺³ passivation
■ Standards	DIN EN 60715

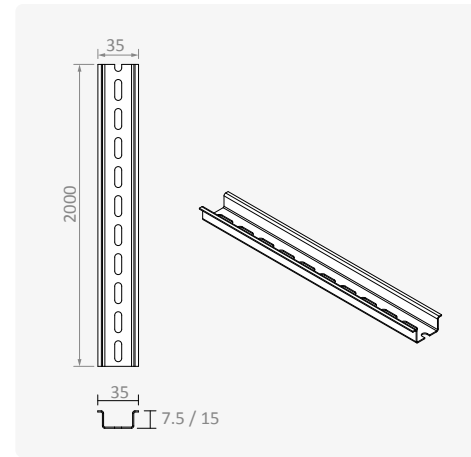


LID MOUNTING FASTENERS

Reference	Packet	Weight	Supply Includes
	pcs/packet	kg/packet	
AK AK JB 051210	50	0.17	■ 50 pcs M5 x 12 YSB screws ■ 50 pcs M5 Finishing washer

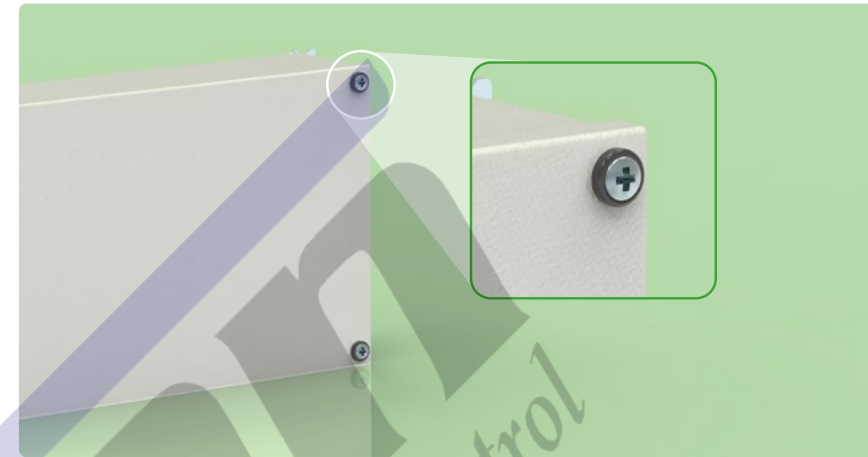

WALL BRACKETS

Reference	Packet	Weight	Characteristics		Supply Includes
	pcs/packet	kg/packet	■ Material	DIN EN 10130 DC01 CCRS	
AK KL 0010	4	0.16	■ Surface Finishing	Zinc coated Cr ⁺³ passivation	■ Wall mounting screws
			■ Thickness	2 mm	

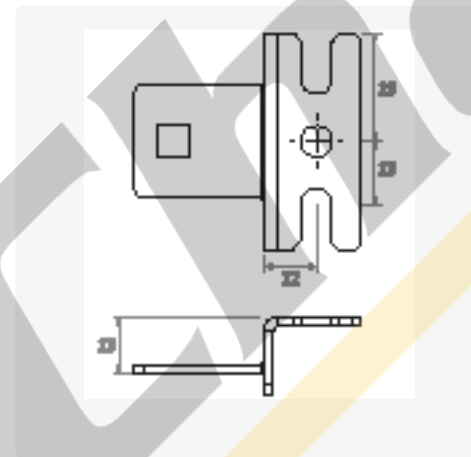

EARTHING CABLE

Reference	Material	Cross-Section	Length	Connection	Packet	Weight
		mm ²	mm		pcs/packet	kg/packet
KB OZ 061908080	Yellow - Green, Isolated copper conductor	6	190	M8-M8	10	0.16

